
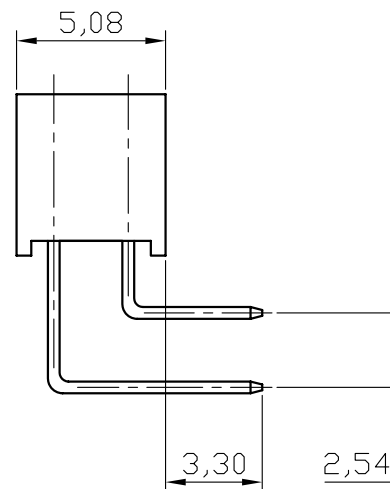


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

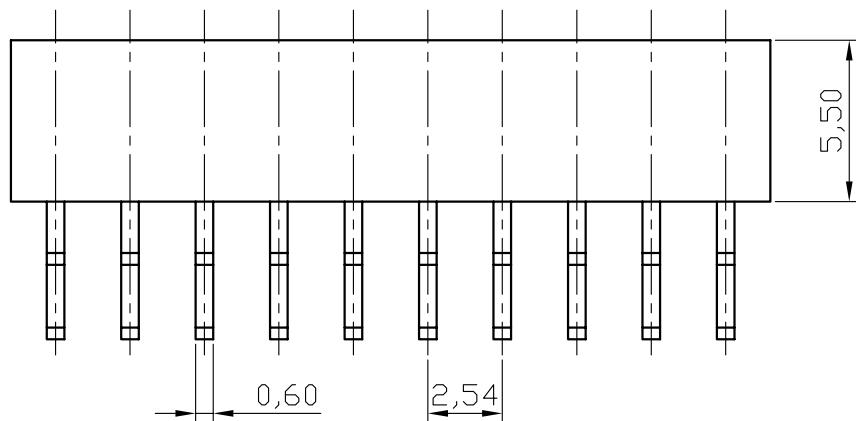


SPECIFICATIONS

Material

Insulator: PBT, Glass Reinforced, Rated UL 94V-0
Contact: Phaspor Bronze

Electrical

Currente Rating: 1Amp
Contact Resistance: 30mΩ max.
Insulation Resistance: 3000MΩ min.
Dielectric Withstanding Voltage: 500V/AC for 1 Minute
Operating Temperature: -40°C to +105°C

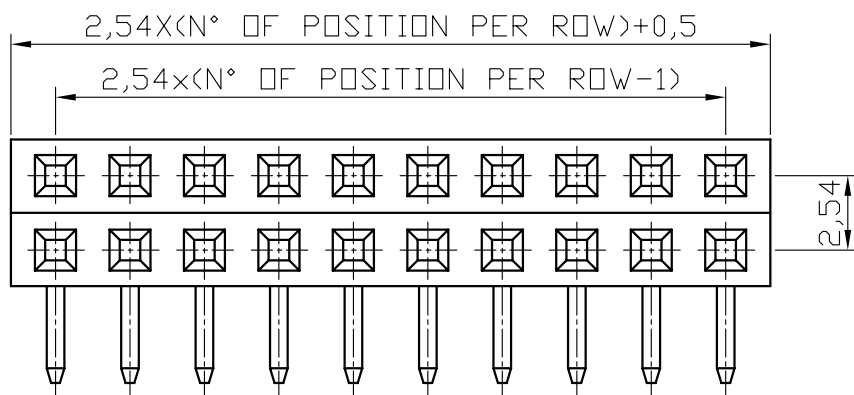

HOW TO ORDER: MAT[][D][N][]S[5.5][][R]

1 2 3 4 5 6 7

- | | |
|--|--|
| 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80 | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn |
| 2- Row Version:
(S)-Single Row
(D)-Double Row | 5- Profile:
(5.5)-5,50mm
(5.7)-5,70mm |
| 3- Pin Style
(N)-90°
(R)-180° | 6- Pin Length:
(A)-2,70mm (Standard)
(B)-11,0mm |
| | 7- (R)RoHS Compliant |



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 4:1	TITLE FEMALE HEADER 2.54mm HEIGHT 5.5mm DUAL ROW 90°	DATE JULY 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		




SPECIFICATIONS

Material

Insulator: PBT, Glass Reinforced, Rated UL 94V-0
Contact: Phaspor Bronze

Electrical

Currente Rating: 1Amp
Contact Resistance: 30mΩ max.
Insulation Resistance: 3000MΩ min.
Dielectric Withstanding Voltage: 500V/AC for 1 Minute
Operating Temperature: -40°C to +105°C

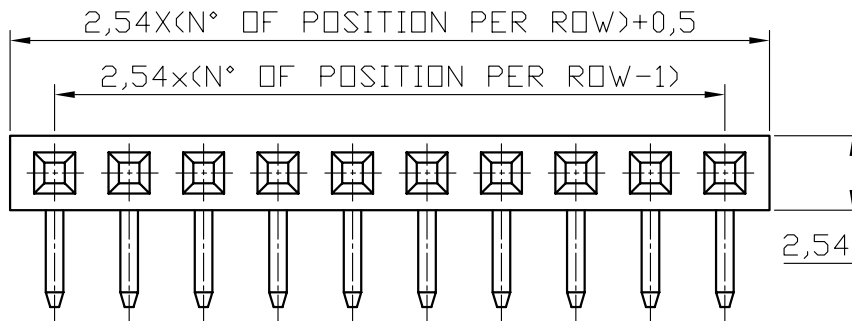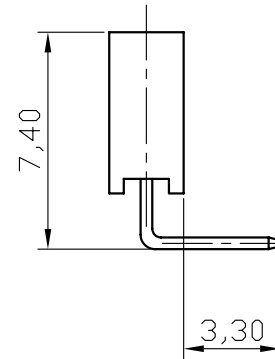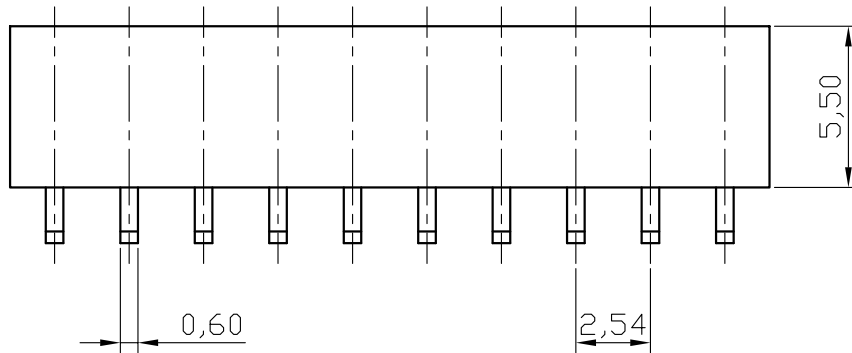

HOW TO ORDER: MAT[][S][N][]S[5.5][][R]

1 2 3 4 5 6 7

- | | |
|--|--|
| 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80 | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn |
| 2- Row Version:
(S)-Single Row
(D)-Double Row | 5- Profile:
(5.5)-5,50mm
(5.7)-5,70mm |
| 3- Pin Style
(N)-90°
(R)-180° | 6- Pin Length:
(A)-2,70mm (Standard)
(B)-11,0mm |
| | 7- (R)RoHS Compliant |



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 4:1	TITLE FEMALE HEADER 2.54mm HEIGHT 5.5mm SINGLE ROW 90°	DATE JULY 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO