

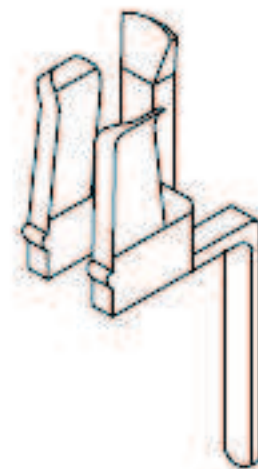
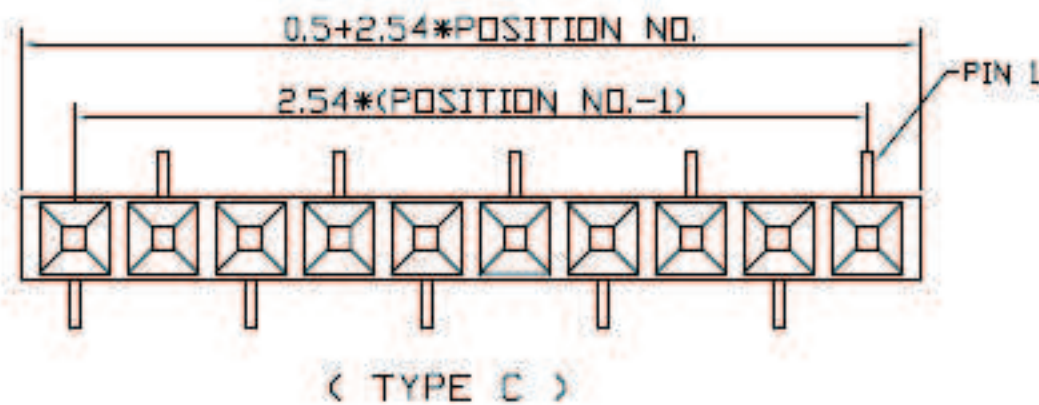


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

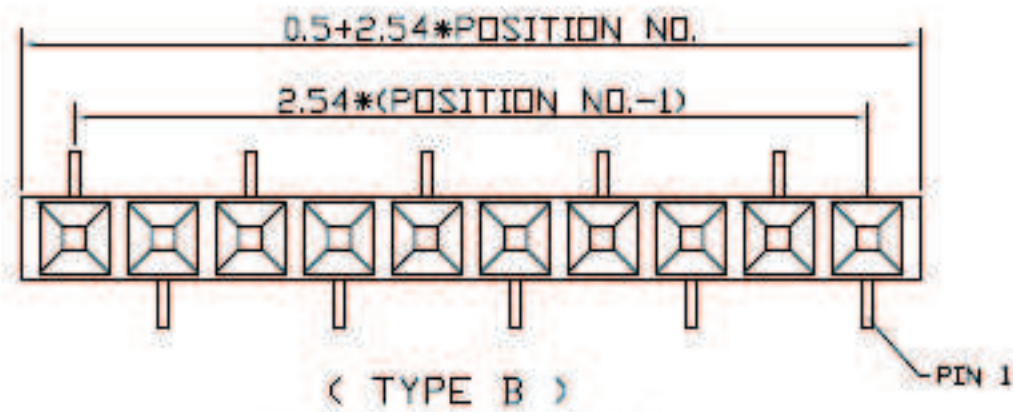

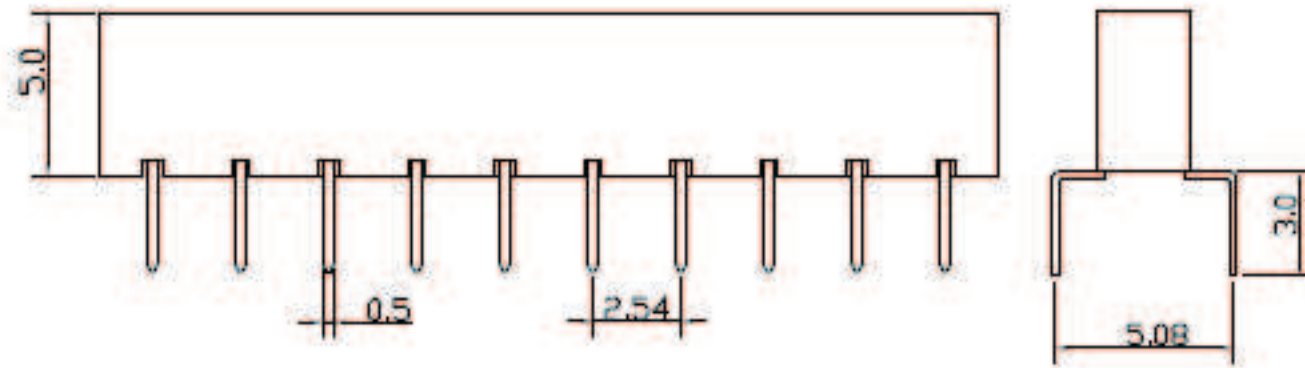

SPECIFICATIONS

CURRENT RATING	1 AMP DC
CONTACT RESISTANCE	30 MILLIOHM MAX
INSULATION RESISTANCE	1000 MEGOHM MIN
DIELECTRIC VOLTAGE	500V AC FOR ONE MINUTE
OPERATING TEMPERATURE	-10°C TO 105°C

HOW TO ORDER: MAT[][S][R][]D5[][R] 1 2 3 4 5 6

- | | |
|--|--|
| 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80 | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn |
| 2- Row Version:
(S)-Single Row
(D)-Double Row | 5- Lay Out
(B) Type B
(C) Type C |
| 3- Pin Style
(N)-90°
(R)-180° | 6- (R) RoHS Compliant |

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE	TITLE	DATE September 2007
TOLERANCE: ±0.25		2.54mm FEMALE HEADER - 5.0mm DUAL ENTRY TYPE	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego