

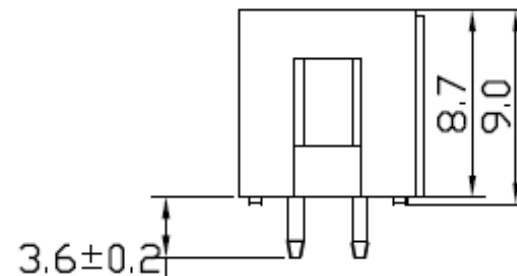


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

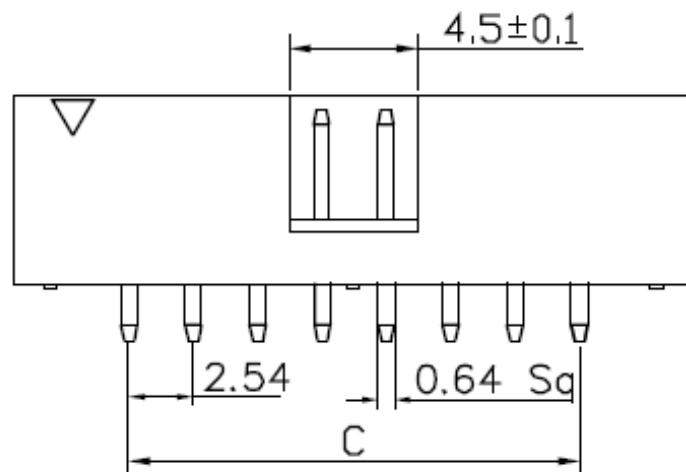

SPECIFICATIONS

Current Rating:	1Amps
Insulator resistance:	1000 Megohms min.
Voltage:	AC 500V For One minute
Operating Temperature:	-55°C~+105°C
Contact Material:	Bronze
Contact Plating:	Gold Flash
Standard:	PBT+30%Glass-Fiber{UL-94-V0}
Contact Resistance:	100mΩ min. At DC 500V

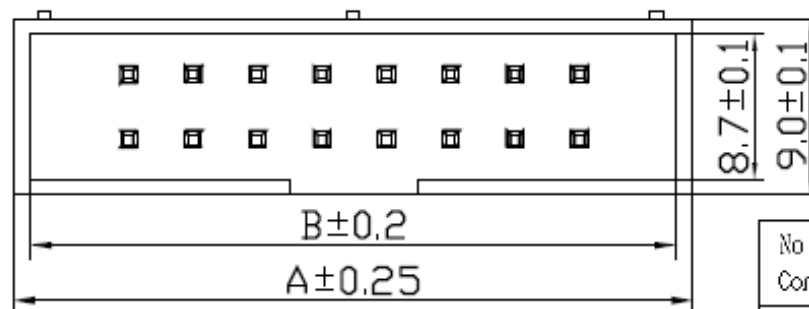

No of Contacts	Dimensions		
	A	B	C
10pin	20.3	18.1	10.16
14pin	25.38	23.18	15.24
16pin	27.92	25.72	17.78
20pin	33.0	30.8	22.85
26pin	40.62	38.42	30.48
34pin	50.8	48.58	40.64
40pin	58.4	56.2	48.26
50pin	71.1	68.9	60.96

HOW TO ORDER:


3025[S][][]R

1 2 3

1- Pin Style
(R)-90°
(S)-180°

2- Nr. of Ways
10 to 50

3- Terminal Plating:
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn

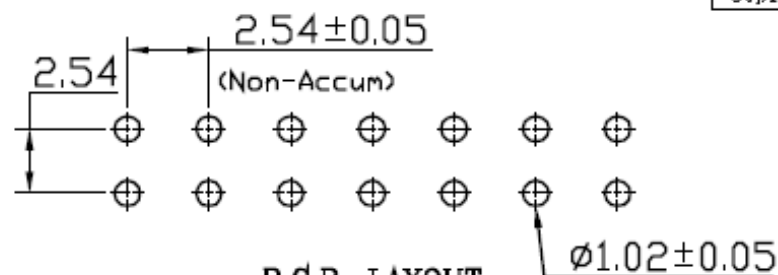

P.C.B. LAYOUT



MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT	SCALE	TITLE	DATE
mm		Box Header 2.54mm 180° PHT	DECEMBER 2009
TOLERANCE: ±0.25			APP. BY
			CHK. BY
			DR. BY Felipe