
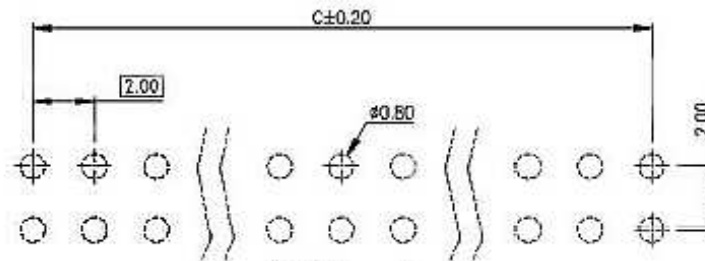
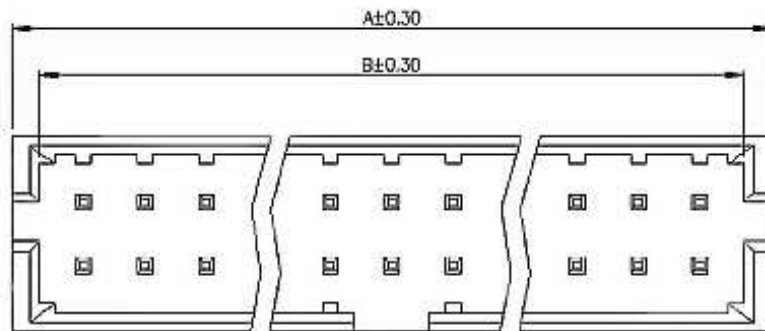
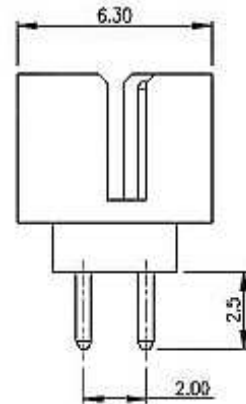


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

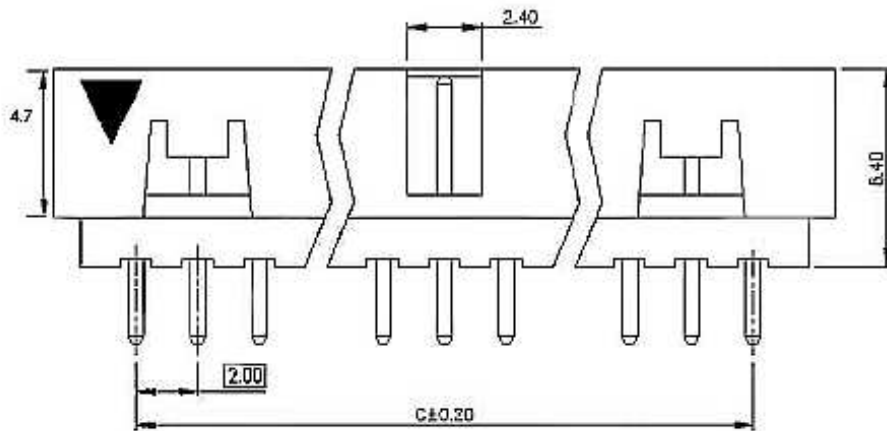

PCB Layout
(Top View)

Electrical Characteristics

Current Rating: 1.0 Amp. Max.
 Dielectric Withstand Voltage:
 800V AC RMS for 60Seconds.
 Insulation Resistance:
 1000M Ohms Min. at 500V DC.

Dimensions			
Pos.	A	B	C
08	10.65	8.85	6.00
10	12.65	10.85	8.00
12	14.65	12.85	10.00
14	16.65	14.85	12.00
16	18.65	16.85	14.00
20	22.65	20.85	18.00
22	24.65	22.85	20.00
24	26.65	24.85	22.00
26	28.65	26.85	24.00
30	32.65	30.85	28.00
34	36.65	34.85	32.00
40	42.65	40.85	38.00
44	46.65	44.85	42.00
50	52.65	50.85	48.00

HOW TO ORDER: 3020[S][][]6,4R 1 2 3

1- Version:
 (S)-180°
 (R)-90°
 2- N° of Ways:
 See Table

3- Terminal Plating:
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
 (C)-0,38um Au/Sn
 (H)-0,76um Au/Sn

		MATRIX TECNOLOGIA IND. E COM. LTDA.	
UNIT mm	SCALE	TITLE BOX HEADER 2,00mm PROFILE 6,4mm 180°	DATE DECEMBER 2009
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Felipe