


| REV | ECN. NO. | APP | DATE |
|-----|----------------|-----|------|
| A | EDIÇÃO INICIAL | | |
| B | NOVO CÓDIGO | | |
| | | | |
| | | | |

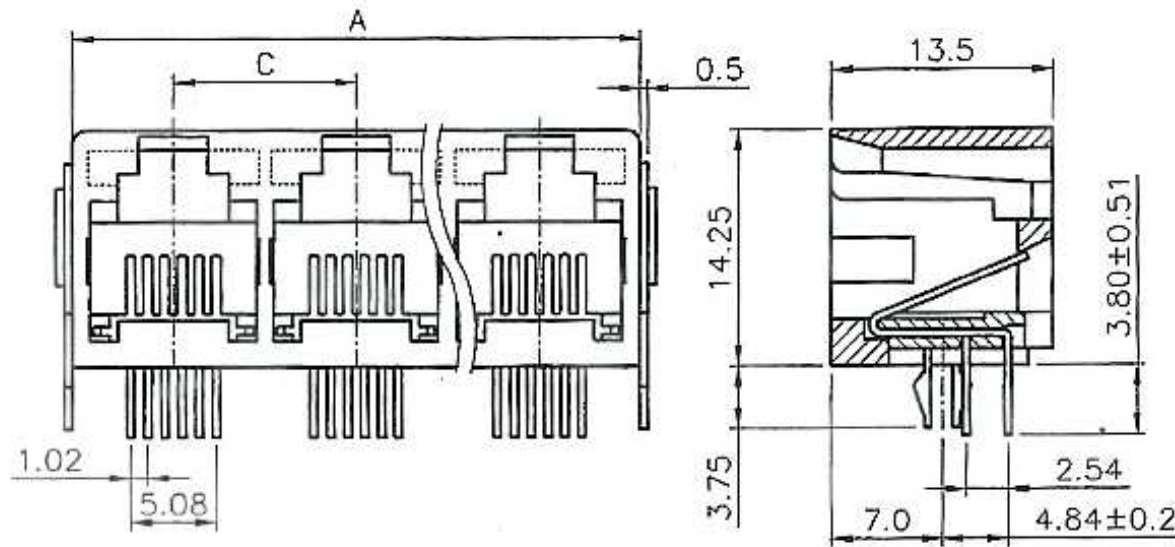


| DIMENSION | NO. OF PORT | | | | | | | | | | |
|-----------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| A | 23.2 | 34.2 | 45.2 | 56.2 | 67.2 | 78.2 | 89.2 | 100.2 | 111.2 | 122.2 | 133.2 |
| B | 23.7 | 34.7 | 45.7 | 56.7 | 67.7 | 78.7 | 89.7 | 100.7 | 111.7 | 122.7 | 133.7 |
| C | 11.00 | 22.00 | 33.00 | 44.00 | 55.00 | 66.00 | 77.00 | 88.0 | 99.0 | 110.0 | 121.0 |

HOW TO ORDER: 2002[] [] [P][3]67R

1 2 3 4

- | | |
|---|--|
| 1- No. Contact (6P2C) (6P4C) (6P6C) | 3- Body Option: (P)-Parallel Metal Pegs |
| 2- Contact Plating: ()-Gold 6U" (15)-Gold 15U" (30)-Gold 30U" (50)-Gold 50U" | 4- Gang Option: ()-1 Jack (2)-2 Jacks (3)-3 Jacks (4)-4 Jacks (5)-5 Jacks (6)-6 Jacks |

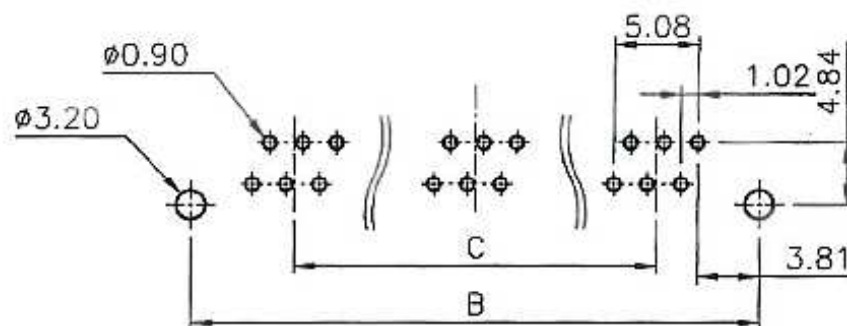

PC Board Layout



MATRIX Tecnologia Ind. e Com. Ltda.

| UNIT | SCALE | TITLE | DATE |
|------------------|-------|--|---------------|
| mm | | Side Entry LP P.C.B Jack Metal Pegs | DECEMBER 2009 |
| TOLERANCE: ±0.25 | | | APP. BY |
| | | MATL | CHK. BY |
| | | DWG. NO. | DR. BY Felipe |