



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

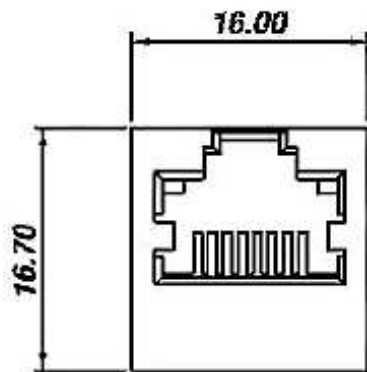



**SHIELDED**

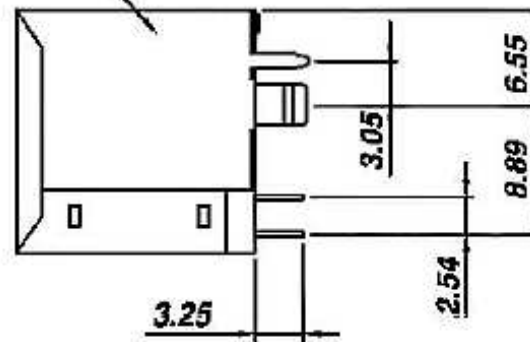

**SPECIFICATION :**

**1. Electrical Char.**



- Insulation Resistance : 500M-Ohm Min.*
- Contact Resistance : 20milli-Ohm Max.*
- Rating Current : 1.5A Max.*
- Rating Voltage : 120V AC.*
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.*

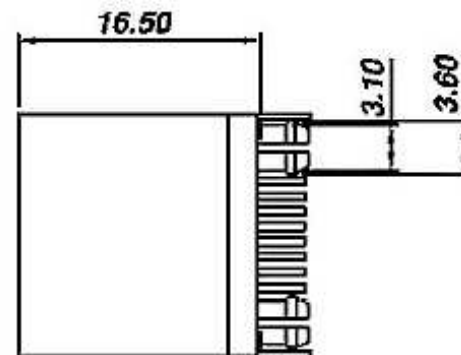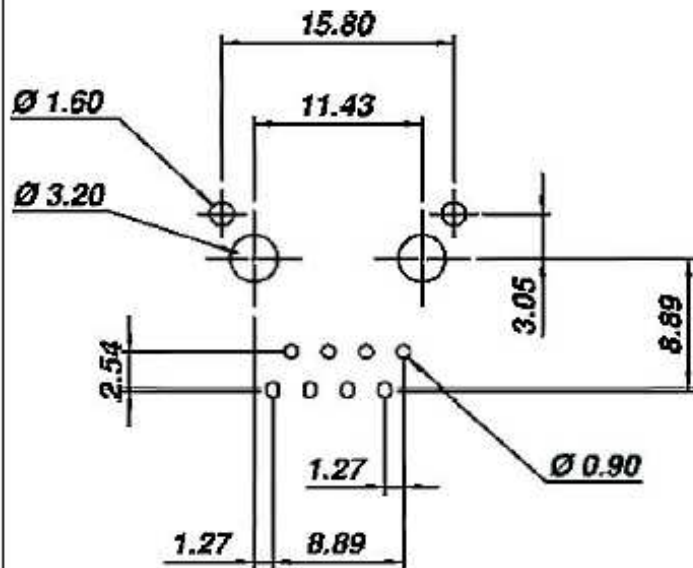

**HOW TO ORDER:  
2002[8P8C][ ][D][S]52R**

**1 2 3 4**

- 1- No. Contact  
(4P2C)  
(4P4C)  
(6P2C)  
(6P4C)  
(6P6C)  
(8P8C)
- 2- Contact Plating:  
( )-Gold 6U"  
(15)-Gold 15U"  
(30)-Gold 30U"  
(50)-Gold 50U"
- 3- Body Option:  
(A)-With Panel Stop (Unshielded)  
(B)-W/O Panel Stop (Unshielded)  
(D)-W/O Panel Stop (Shielded)
- 4- Foot Type:  
(H)-Half Round Foot  
(S)-Split Foot

 <b>MATRIX TECNOLOGIA IND. E COM. LTDA.</b>			
UNIT mm	SCALE	TITLE	DATE DECEMBER 2009
TOLERANCE: ±0.25		TOP ENTRY PCB JACK "F" TYPE SHIELDED	APP. BY
		MATL	CHK. BY
DWG. NO.		DR. BY <b>Felipe</b>	