
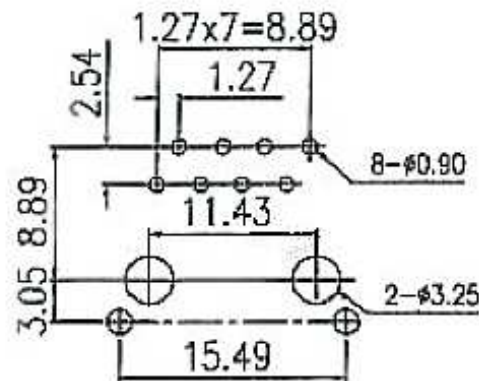
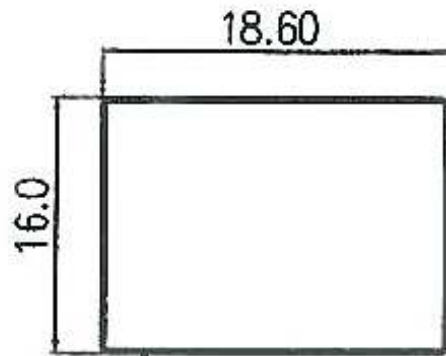


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

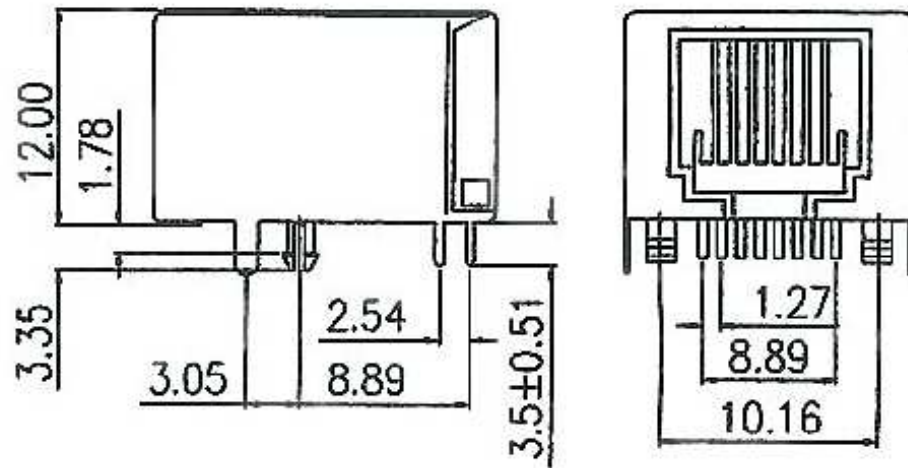

PCB Layout

MATERIAL

Housing: Glass Filled Polyester UL94V-0, Black

Shielding: 0.25mm Thick Copper Alloy, Tin-plated

Contact: 0.45mm Diameter Phosphor Bronze

HOW TO ORDER: 2002[][Y]57R 1 2 3

- | | |
|--|---|
| 1- No. Contact
(4P2C)
(4P4C)
(6P2C)
(6P4C)
(6P6C)
(8P2C)
(8P4C)
(8P6C)
(8P8C) | 2- Contact Plating:
()-Gold 6U"
(15)-Gold 15U"
(30)-Gold 30U"
(50)-Gold 50U" |
| | 3- Body Option:
(N)-W/O Shielded
(Y)-With Fully Shielded
(F)-Front Shielded Only |



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT	SCALE	TITLE	DATE
mm		Side Entry LP P.C.B Jack	DECEMBER 2009
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Felipe