
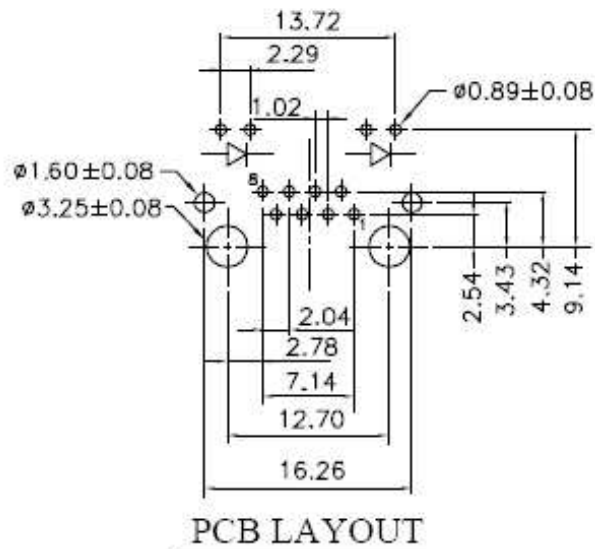
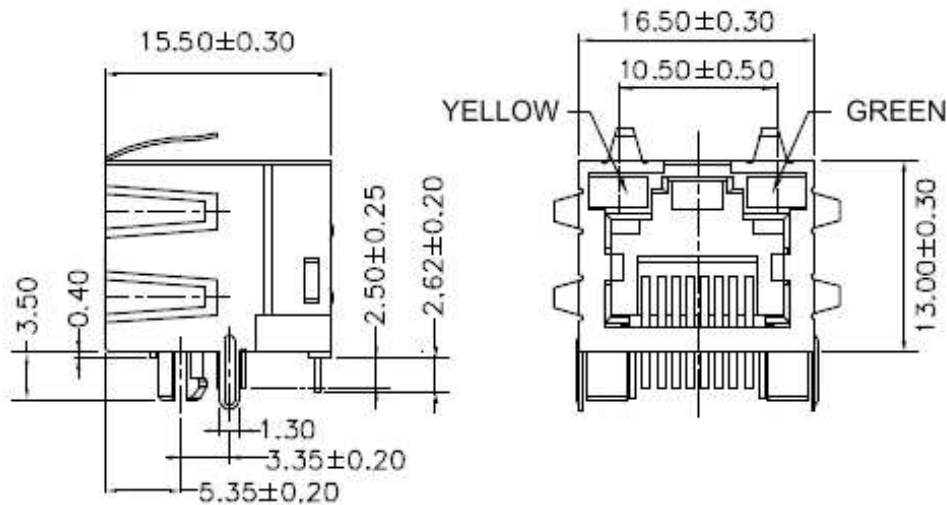


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		



ELECTRICAL:

Current Rating : 1.5 AMP
Voltage Rating : 150 VAC
Contact Resistance : 20 Milliohms MAX
Insulation Resistance : 500 Milliohms MIN
Dielectric Withstanding Voltage : 1000 VAC, 1min

**HOW TO ORDER:
2002[8P8C][][YG][]73R**

1 2 3 4

- | | |
|---|---|
| 1- No. Contact
(8P8C)-RJ45 | 3- Led Option:
(YG)-With Yellow/Green Led
(GY)-With Green/Yellow Led |
| 2- Contact Plating:
()-Gold 6U"
(15)-Gold 15U"
(30)-Gold 30U"
(50)-Gold 50U" | 4- Gang Option:
()-1 Jack
(2)-2 Jacks
(4)-4 Jacks
(6)-6 Jacks
5- (R)-RoHS Compliant |



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT	SCALE	TITLE	DATE
mm		LED P.C.B JACK WITH YELLOW / GREEN LED	DECEMBER 2009
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Felipe