


CKT	A	B
3	9.55	5.20
4	10.80	6.45
5	12.05	7.70
6	13.30	8.95
7	14.55	10.20
8	15.80	11.45
9	17.05	12.70
10	18.30	13.95
11	19.55	15.20
12	20.80	16.45
13	22.05	17.70
14	23.30	18.95
15	24.55	20.20
16	25.80	21.45
17	27.05	22.70
18	28.30	23.95
19	29.55	25.20
20	30.80	26.45
21	32.05	27.70
22	33.30	28.95
23	34.55	30.20
24	35.80	31.45
25	37.05	32.70
26	38.30	33.95
27	39.55	35.20
28	40.80	36.45
29	42.05	37.70
30	43.30	38.95
31	44.55	40.20
32	45.80	41.45


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

## HOW TO ORDER: ZIF[ ] [S][E][B]1,25R 1 2 3 4

- 1- N° of Ways:  
See Table
- 2-Mounting Type:  
(S)-180° Type Normal Layout  
(E)-180° Type Reverse Layout  
(R)-90°
- 3- Terminal Plating:  
(E)-Sn
- 4- Thickness:  
(A)-0,3mm  
(B)-0,2mm  
(C)-0,1mm

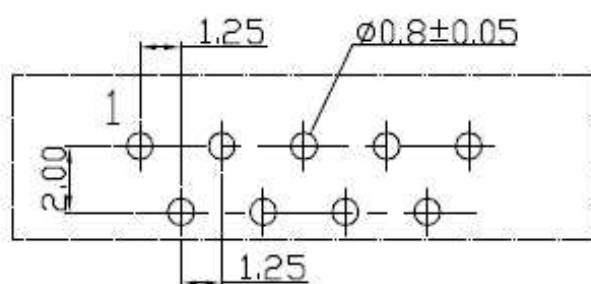

RECOMMEND PCB LAYOUT  
COMPONENT SIDE

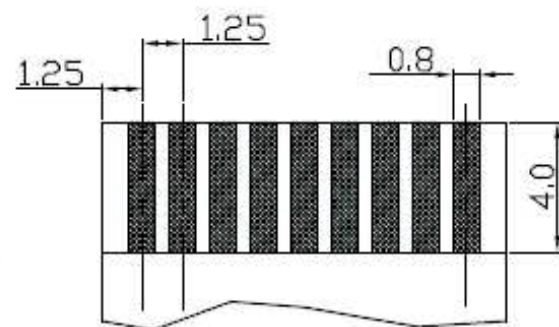

FFC/FPC DIMENSION  
THICKNESS 0.2±0.05mm

 <b>MATRIX TECNOLOGIA IND. E COM. LTDA.</b>			
UNIT mm	SCALE	TITLE	DATE JANUARY 2010
TOLERANCE: ±0.25		ZIF DIP FFC/FPC 1,25mm	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY <b>Felipe</b>