

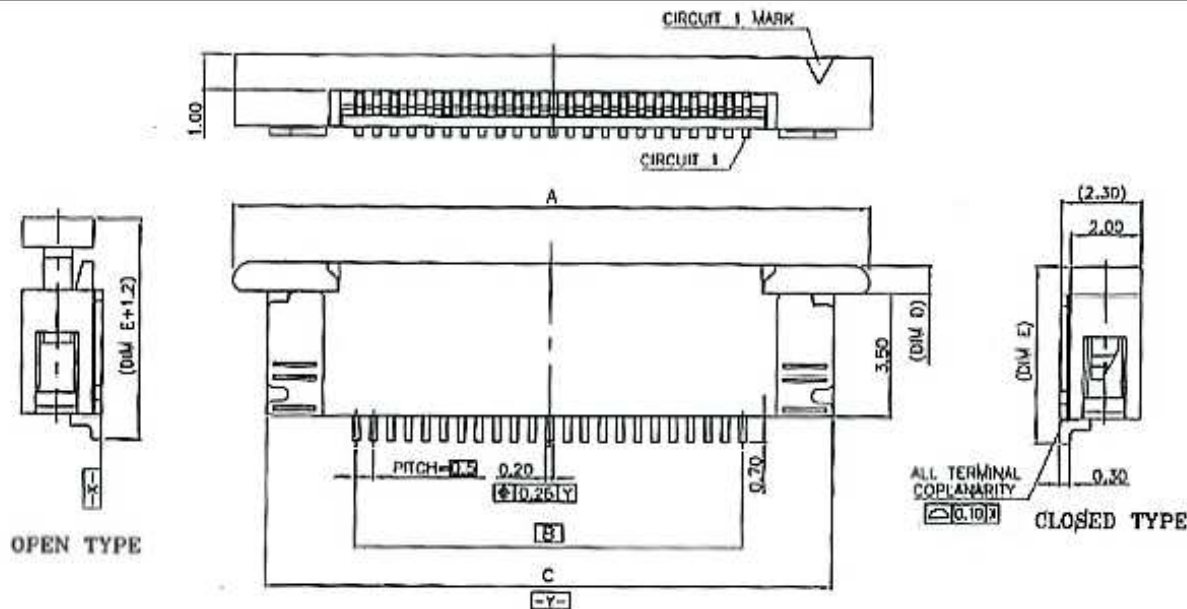


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		


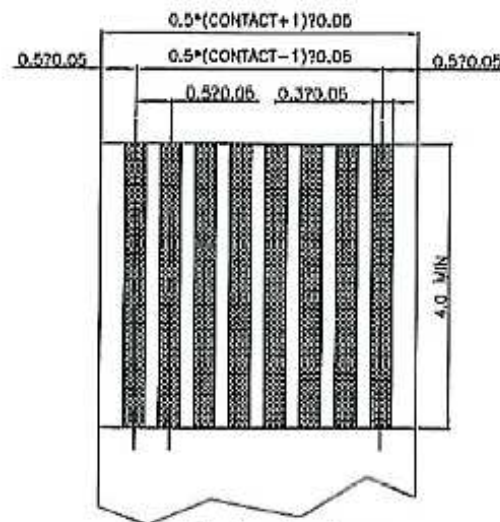


OKT	A	B	C	D	E
3	8.10	1.00	8.10		
4	8.60	1.50	8.60		
6	9.10	2.00	9.10		
8	9.60	2.50	9.60		
7	10.10	3.00	10.10		
9	10.60	3.50	10.60		
9	11.10	4.00	11.10		
10	11.60	4.50	11.60		
11	12.10	5.00	12.10		
12	12.60	5.50	12.60		
13	13.10	6.00	13.10		
14	13.60	6.50	13.60		
15	14.10	7.00	14.10		
16	14.60	7.50	14.60	0.80	6.00
17	15.10	8.00	15.10		
18	15.60	8.50	15.60		
19	16.10	9.00	16.10		
20	16.60	9.50	16.60		
21	17.10	10.00	17.10		
22	17.60	10.50	17.60		
23	18.10	11.00	18.10		
24	18.60	11.50	18.60		
25	19.10	12.00	19.10		
26	19.60	12.50	19.60		
27	20.10	13.00	20.10		
28	20.60	13.50	20.60		
29	21.10	14.00	21.10		
30	21.60	14.50	21.60		

OKT	A	B	C	D	E
31	22.10	15.00	22.10		
32	22.60	15.50	22.60		
33	23.10	16.00	23.10		
34	23.60	16.50	23.60		
36	24.10	17.00	24.10		
36	24.60	17.50	24.60		
37	25.10	18.00	25.10		
38	25.60	18.50	25.60	1.20	6.40
39	26.10	19.00	26.10		
40	26.60	19.50	26.60		
41	27.10	20.00	27.10		
42	27.60	20.50	27.60		
43	28.10	21.00	28.10		
44	28.60	21.50	28.60		
45	29.10	22.00	29.10		
46	29.60	22.50	29.60		
47	30.10	23.00	30.10	1.50	6.70
48	30.60	23.50	30.60		
49	31.10	24.00	31.10		
60	31.60	24.50	31.60		

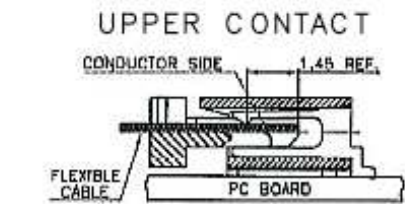

FFC/FPC DIMENSION
THICKNESS 0.3^{+0.03}/_{-0.00} mm

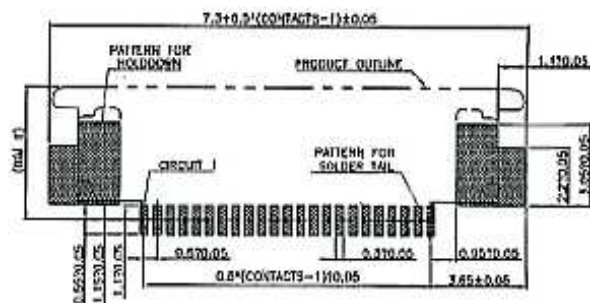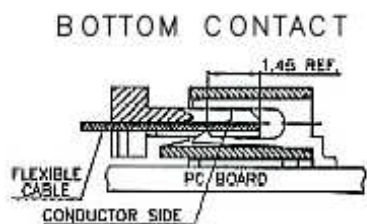

HOW TO ORDER: ZIF [] [] 0,5DR 1 2

- 1-Mounting Type:
(UR)-Upper Contact
(BR)-Bottom Contact
(V)-Vertical Type Normal Layout
(C)-Vertical Type Reverse Layout
- 2- N° of Ways:
See Table

		MATRIX TECNOLOGIA IND. E COM. LTDA.	
UNIT mm	SCALE	TITLE ZIF SMT FFC/FPC 0,5mm BOTTOM/UPPER CONTACT	DATE JANUARY 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
DWG. NO.			DR. BY Felipe