

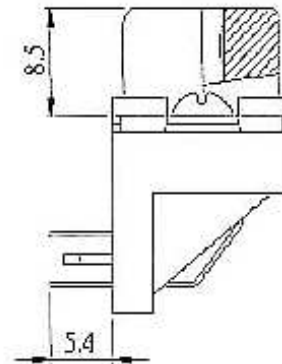
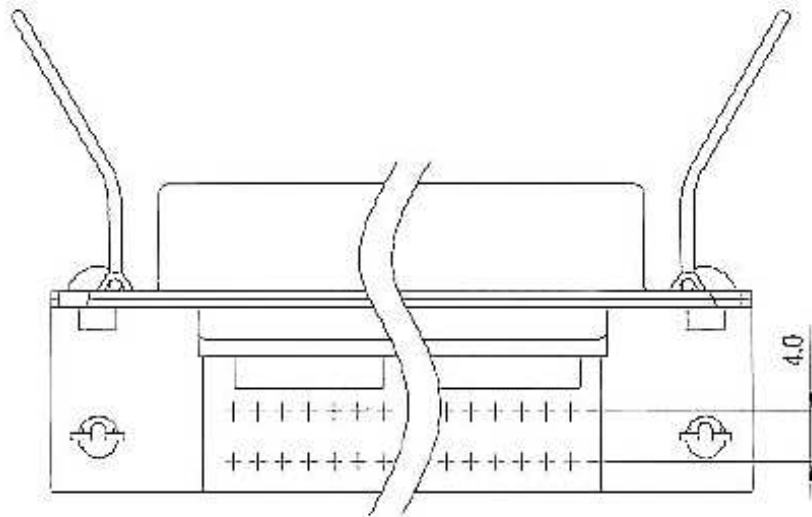


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

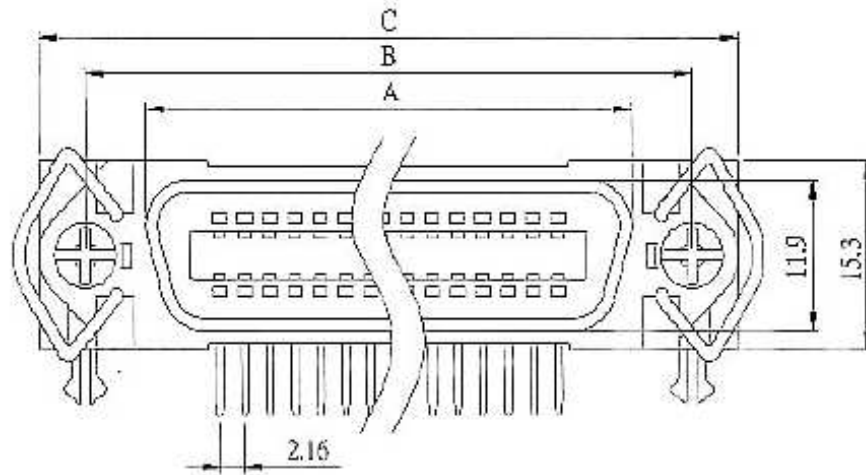



POSITION	A	B	C
14F	25.20	36.00	43.90
24F	36.00	46.80	54.70
36F	48.90	59.70	67.70
50F	64.10	74.90	82.80

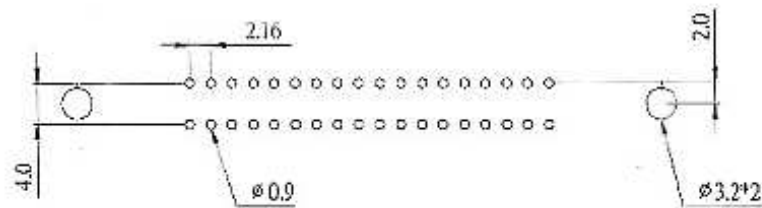

P.C.BOARD LAYOUT

HOW TO ORDER:
CEN[]N[F]R
1 2

- 1- N° of Contacts:
14, 24, 36, 50
- 2- Contact Type:
(M)-Male
(F)-Female

 MATRIX TECNOLOGIA IND. E COM. LTDA.		UNIT	SCALE	TITLE	DATE
		mm		CENTRONIC 90° FOR P.C.B. FEMALE	JANUARY 2010
		TOLERANCE: ± 0.25			APP. BY
		MATL			CHK. BY
		DWG. NO.			DR. BY Felipe

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

SPECIFICATION

Electric




Current Rating: 1Amp

Contact Resistance: 25 Milliohm Max.

Insulation Resistance: 1000 Megohm Max. At 500V DC

Dielectric Withstanding Voltage: 1000V AC/Minute.

Operating Temperature: -55° C to +105° C

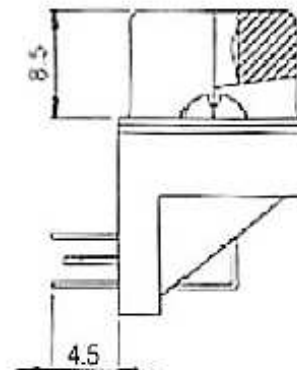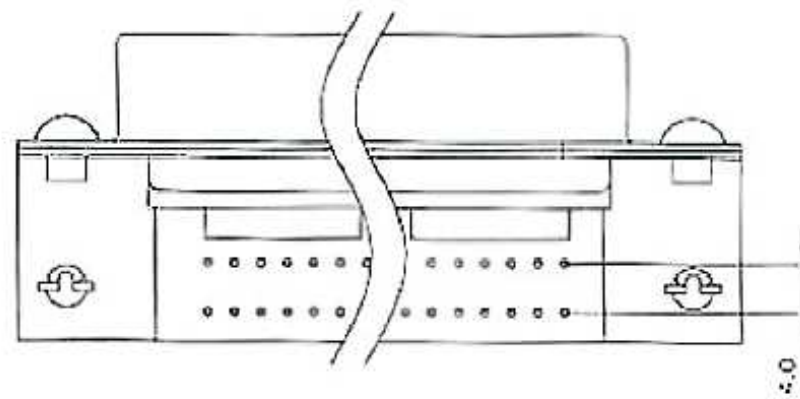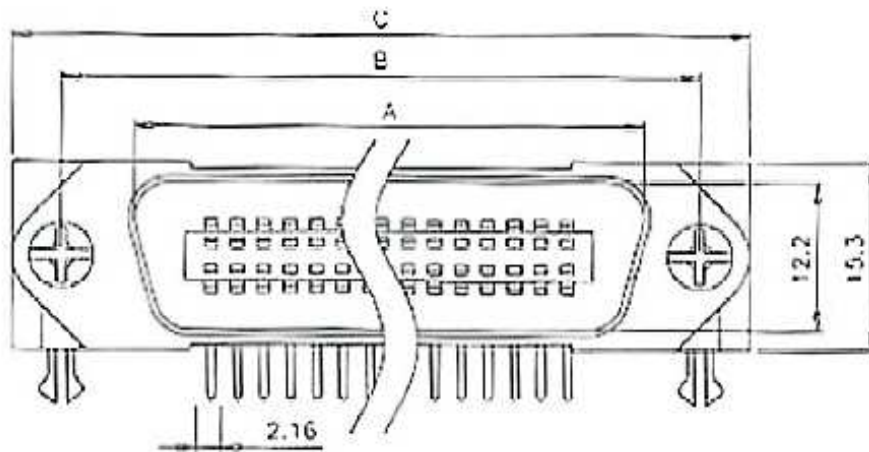

POSITION	A	B	C
14M	25.50	36.00	43.90
24M	36.30	46.80	54.70
36M	49.30	59.70	87.70
50M	64.40	74.90	82.80

HOW TO ORDER: CEN[]N[M]R

1 2


1- N° of Contacts:

14, 24, 36, 50



2- Contact Type:

(M)-Male

(F)-Female

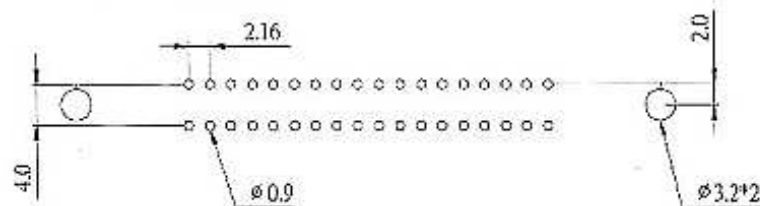

P.C.BOARD LAYOUT

 MATRIX		MATRIX TECNOLOGIA IND. E COM. LTDA.	
UNIT mm	SCALE	TITLE CENTRONIC 90° FOR P.C.B. MALE	DATE JANUARY 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
DWG. NO.			DR. BY Felipe