REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	**NOVO CÓDIGO**		

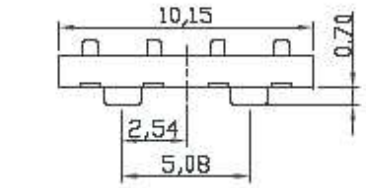

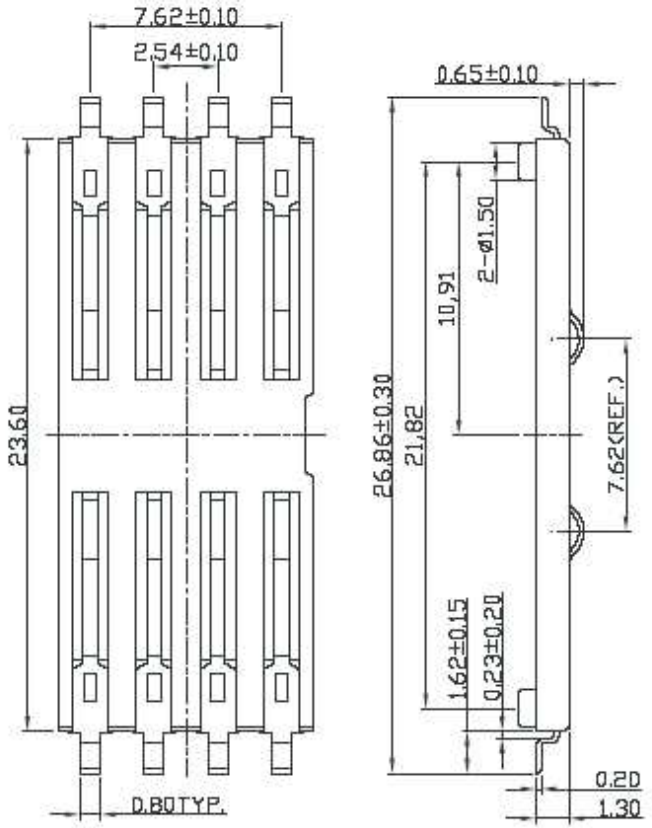

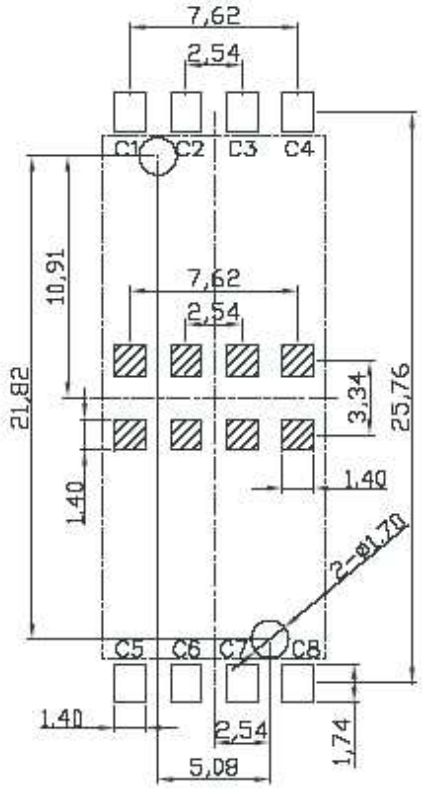

Hatched area is pattern prohibition area
Unit: mm; Tolerances: ±0.15 mm
Reference dimension for PCB layout

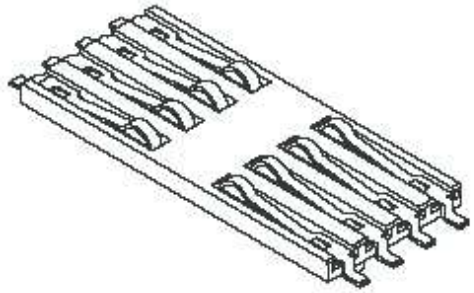

TECHNICAL CHARACTERISTICS

1. General Characteristics
Dimension: 23.60L x 10.15W x 1.30H mm
Weight: Approx. 0.45 g
Contact principle: Friction technology
Operating position: Shaft up / Down / Horizontal
Mounting System: SMT Type (post optional)
Durability: 100,000 cycles min.

2. Mechanical Characteristics
Insulation material: Thermoplastic, UL 94V-0
RoHS Directive 2002/95/EC Compliant

3. Electrical Characteristics
Number of contacts: 8 pins
Contact resistance: 50 mΩ typical, 100 mΩ max.
Insulation resistance: >1000 MΩ / 500 VDC

4. Solderability
Wave: Not applicable
IR reflow: 260°C, 10 sec. Max.
Manual soldering: 360°C, 3 sec. Max.

5. Environmental Characteristics
Operating temperature: - 40°C ~ + 85°C
Operating humidity: 10 % ~ 95 % RH
Storage temperature: - 40°C ~ + 85°C
Storage humidity: 10 % ~ 95 % RH

HOW TO ORDER:
ICC4008CDR

MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT mm	SCALE	TITLE	DATE MARCH 2010
TOLERANCE: ±0.25		ICC4008CDR	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE