



| REV | ECN. NO. | APP | DATE |
|-----|----------------|-----|------|
| A | EDIÇÃO INICIAL | | |
| B | NOVO CÓDIGO | | |
| | | | |
| | | | |

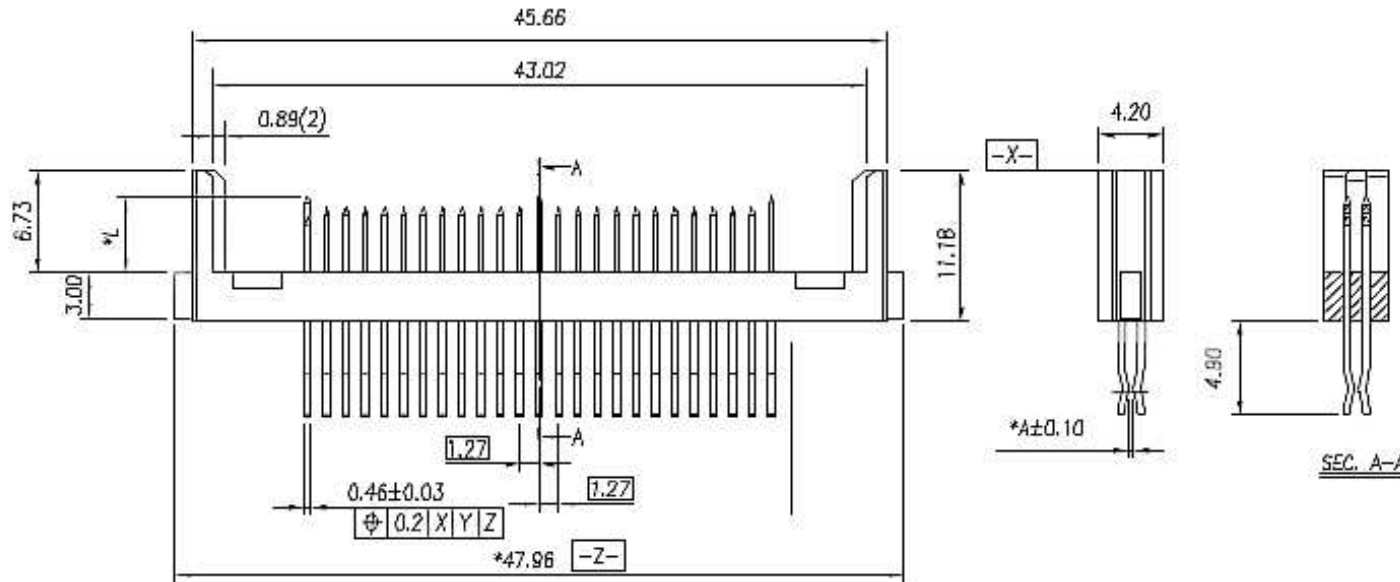


SPECIFICATIONS:



HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE: 40 mΩ max.
 INSULATION RESISTANCE: 1000M Ω max.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

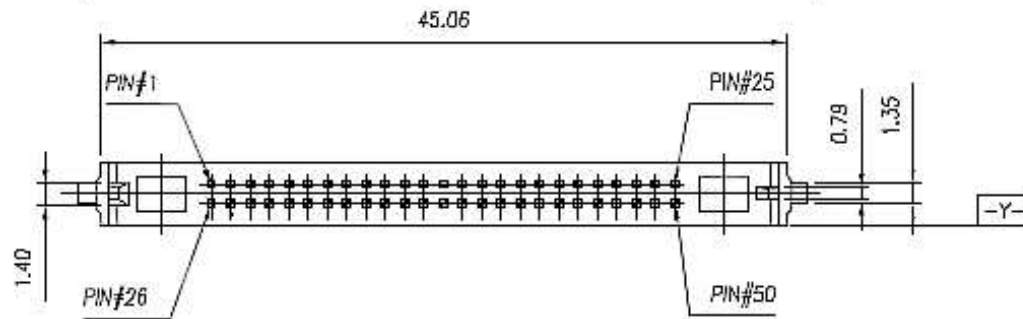

**HOW TO ORDER:
CF775250MABR**

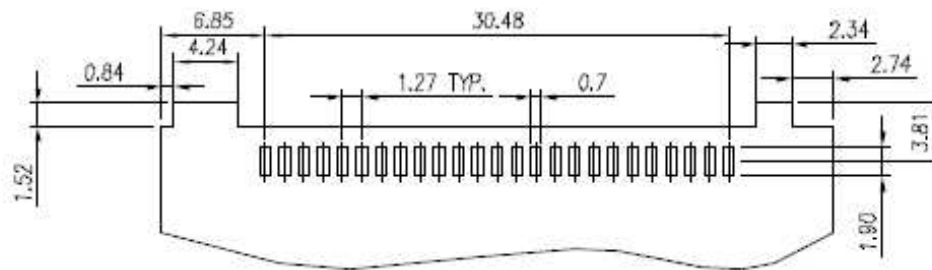

RECOMMENDED P.C.B. PATTERN

|  MATRIX TECNOLOGIA IND. E COM. LTDA. | | | |
|--|-------|---|-----------------|
| UNIT mm | SCALE | TITLE COMPACT FLASH CARD MALE 50 WAYS | DATE MARCH 2010 |
| TOLERANCE: ±0.25 | | | APP. BY |
|  | | MATL | CHK. BY |
| DWG. NO. | | | DR. BY FELIPE |