


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

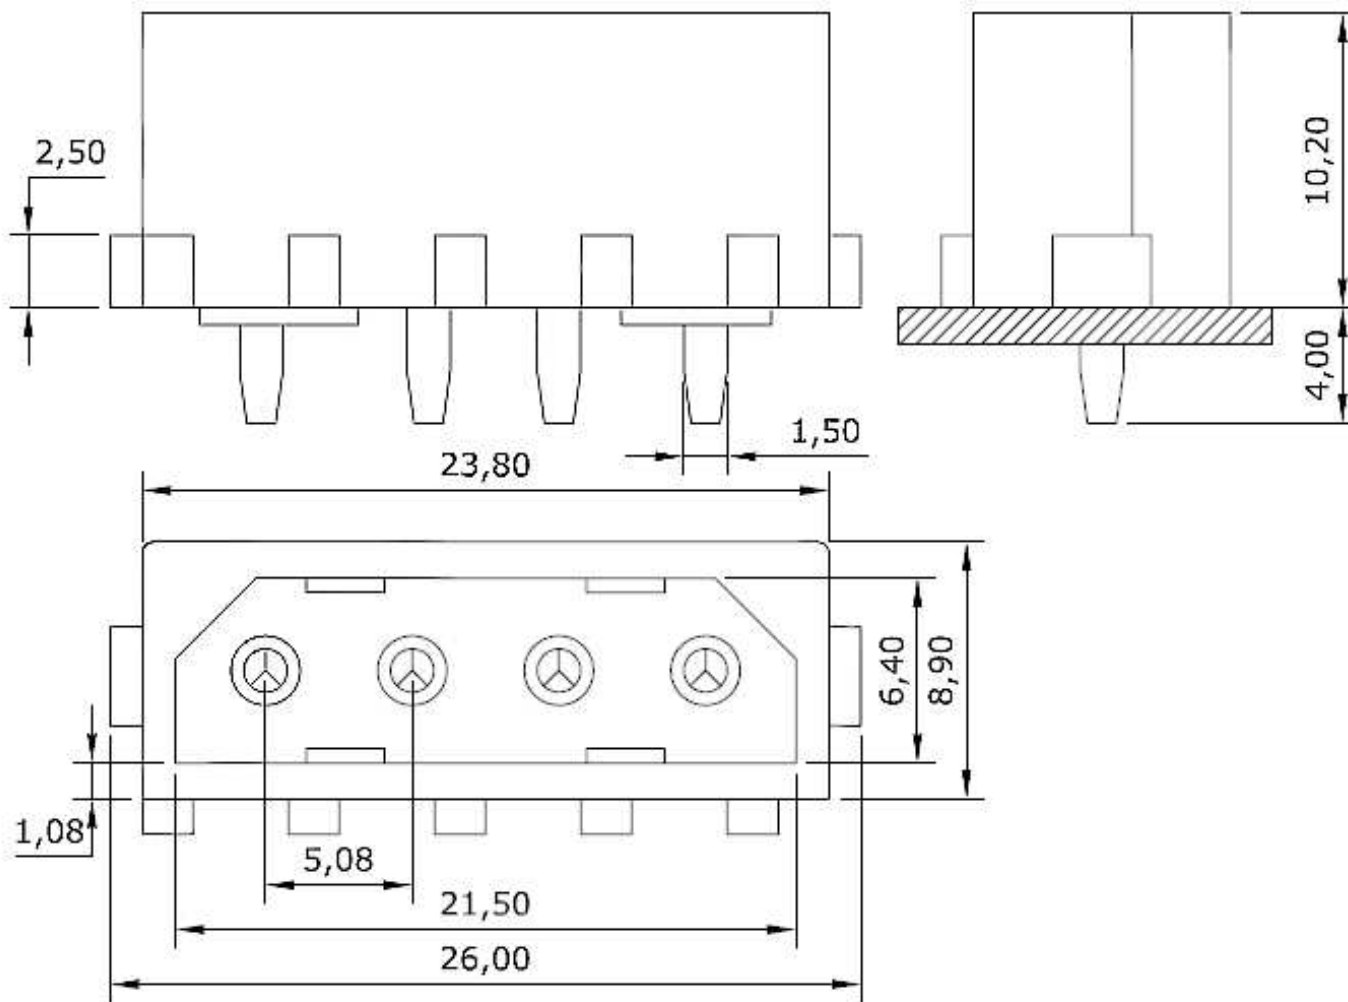


SPECIFICATION


Current Rating: 5A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range: -25°C +105°C
 Insulation Resistance: 1,000M Ω Min
 Withstanding Voltage: 1,500V AC/minute
 Material: Nylon 66, UL94V-2
 Color: White
 Pin: Brass, Tin Plated

HOW TO ORDER: 2430WS[04][]R 1 2

- 1- Nº of Contacts
02, 03 and 04
- 2- Terminal Plating
()-Tin
(G)-Gold Flash
(C)-Selective Gold

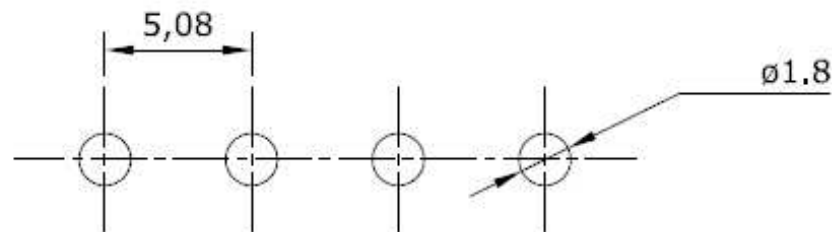

P.C.B. LAYOUT

 MATRIX Tecnologia Ind. e Com. Ltda.		UNIT	SCALE	TITLE	DATE
		mm		5,08mm WAFER 180°	December 2009
		TOLERANCE: ± 0.25			APP. BY
		MATL		CHK. BY	
		DWG. NO.		DR. BY Felipe	