


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

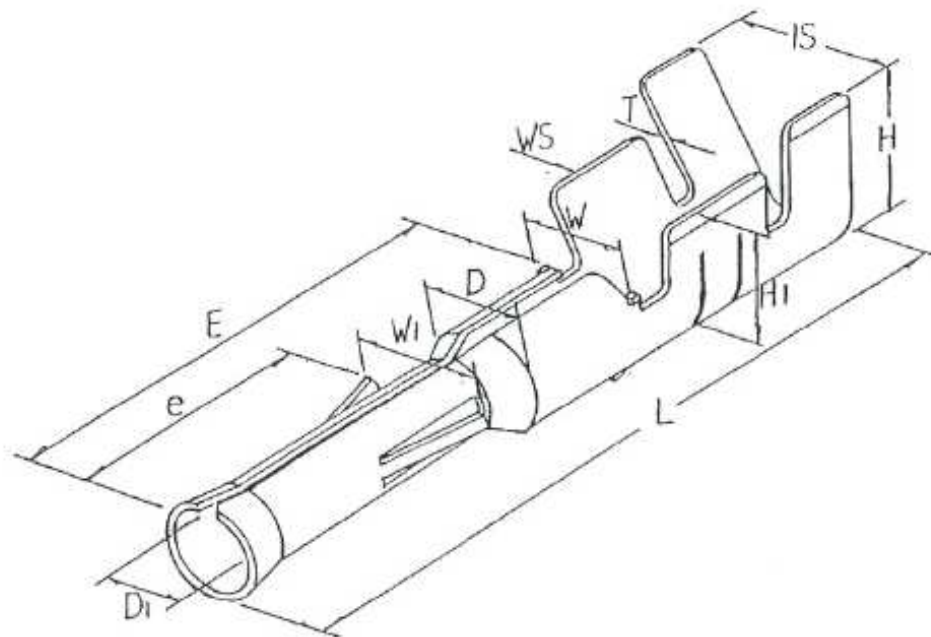

DIMENSION: (MM)

T: 0.25 ± 0.03	H: 4.9 ± 0.3
L: 20.5 ± 0.35	H1: 3.6 ± 0.3
E: 13.3 ± 0.25	D1: 2.0 ± 0.06
W: 3.6 ± 0.25	e: 8.6 ± 0.3
IS: 5.0 ± 0.3	D: $3.2^{+0.1}_{-0.25}$
WS: 3.3 ± 0.3	W1: 4.5 ± 0.25

SPECIFICATION

Current Rating: 8A AC, DC

Voltage Rating: 250V AC, DC

Temperature Range:

$-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: 10m Max.

Insulation Resistance:

1,000M Min.

Withstand Voltage: 1,000M Min.

HOW TO ORDER:

2020TF[][]R

1 2

1- Terminal Plating

()-Tin

(D)-Gold Flash


(C)-Selective Gold

2- Wire Option

(A)-16~18AWG

(D)-18~22AWG

(E)-18~24AWG

 MATRIX TECNOLOGIA IND. E COM. LTDA.			
UNIT mm	SCALE	TITLE	DATE MARCH 2010
TOLERANCE: ± 0.25		7,0mm TERMINAL FEMALE	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE