

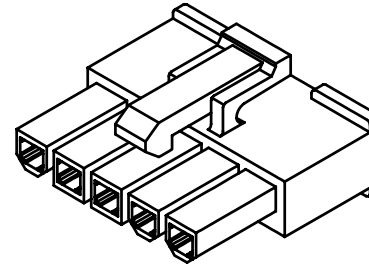


REV/	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		
C	CÓD. ANT. : 4200HFxxR		22/11/11




SPECIFICATIONS


Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0 or UL94V-2

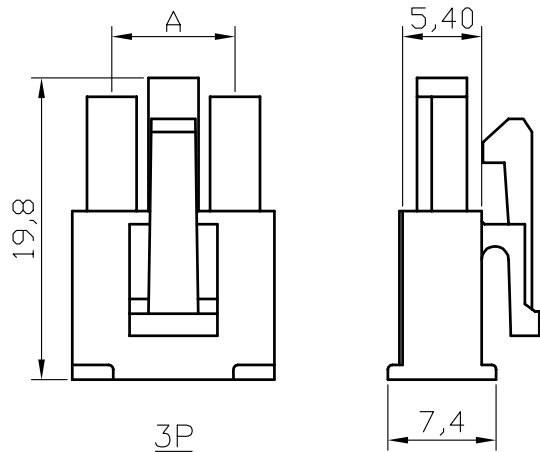


3P

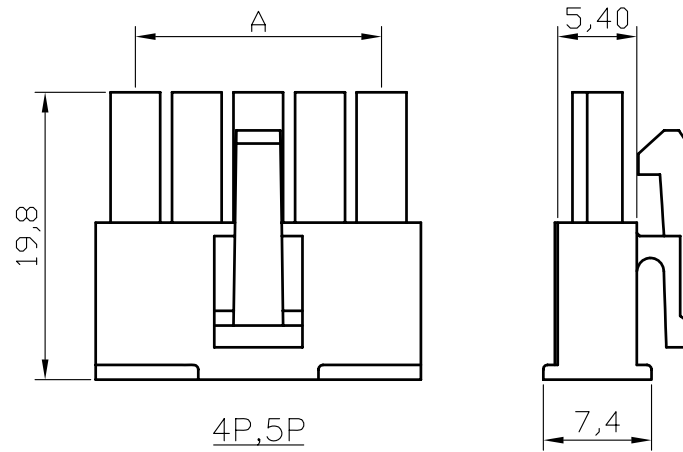

4P,5P



Circuit 1

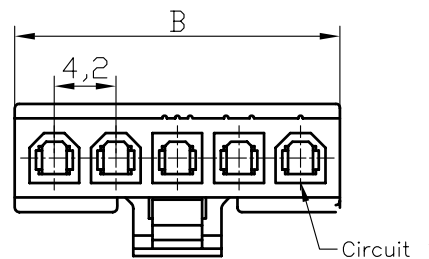

Circuit 1

Series Nr.
4200

1 - Product:
(H) - Housing

2 - Row Version:
(S) - Single Row
(D) - Double Row

HOW TO ORDER:
4200 [H] [S] [F] [] [] [E] [R]
1 2 3 4 5 6 7

3 - Type:
(F) - Female
(M) - Male

5 - Material:
(N) Nylon 66 UL 94V-2
(V) Nylon 66 UL 94V-0

4 - Nr. of Ways:
02 (1x2) - 12 (1x12)
02 (2x1) - 24 (2x12)

6 - Body Option:
(E) - With Ear

7 - (R) RoHS Compliant




NO.	Dimensions	
	A	B
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20



MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT mm	SCALE	TITLE 4,2mm HOUSING FEMALE SINGLE ROW	DATE MARCH 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		
C	CÓD. ANT. : 4200HFxxR		22/11/11

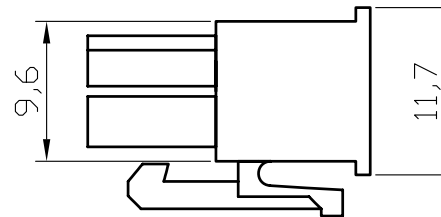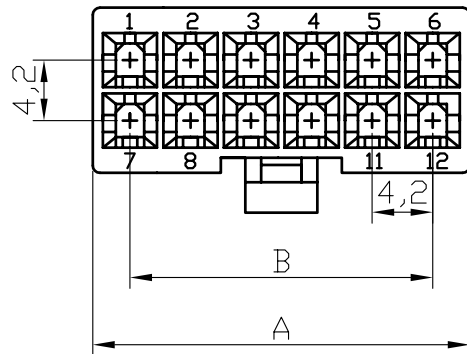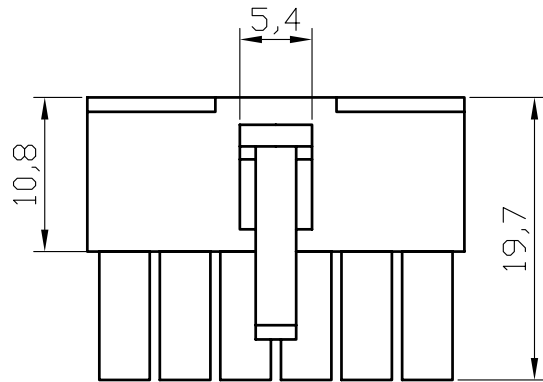

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0 or UL94V-2

HOW TO ORDER:

4200 [H] [D] [F] [] [] [E] [R]
1 2 3 4 5 6 7

Series Nr.

4200

3 - Type:

(F) - Female

(M) - Male

5 - Material:

(N) Nylon 66 UL 94V-2

(V) Nylon 66 UL 94V-0

1 - Product:

(H) - Housing

4 - Nr. of Ways:

02 (1x2) - 12 (1x12)

02 (2x1) - 24 (2x12)

6 - Body Option:

(E) - With Ear

2 - Row Version:

(S) - Single Row

(D) - Double Row

7 - (R) RoHS Compliant

CIRCUITS	DIMENSION	
	A	B
2	5.5	
4	9.7	4.2
6	13.9	8.4
8	18.1	12.6
10	22.3	16.8
12	26.5	21.0
14	30.7	25.2
16	34.9	29.4
18	39.1	33.6
20	43.3	37.8
22	47.5	42.0
24	51.7	46.2



MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT	SCALE	TITLE	DATE
mm		4,2mm HOUSING FEMALE DUAL ROW	MARCH 2010
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE