



SMD POWER INDUCTORS


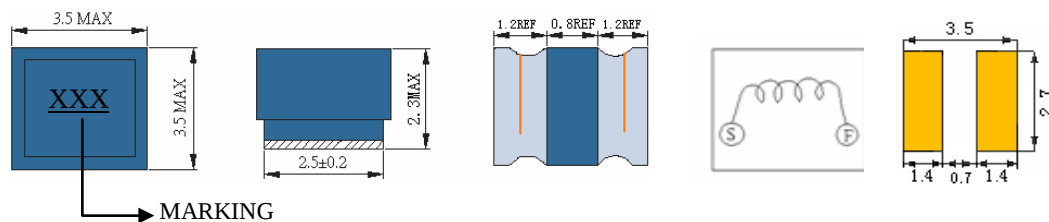


- Features

- 1 Magnetically shielded construction
- 2 Low DCR
- 3 Small size
- 4 Excellent Power Density
- 5 Engineered to Provide High Efficiency



ELECTRICAL CHARACTERISTICS

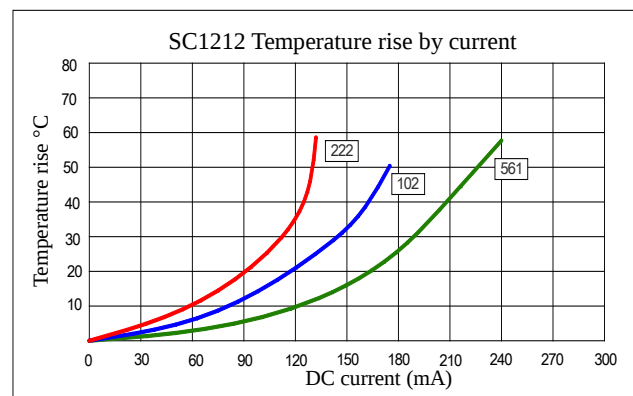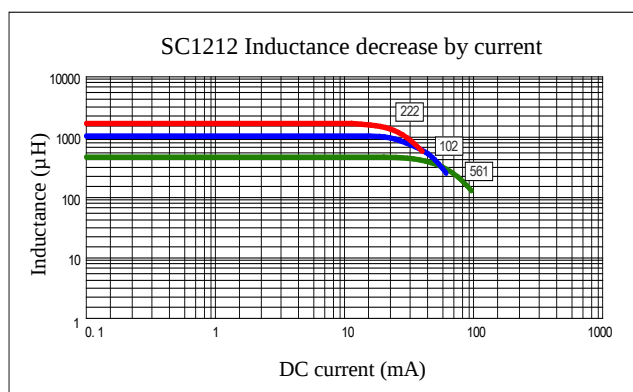[illegible]

- (1). Inductance tolerance $\pm 30\%$ tested at 1.0V, 0ADC and 25°C
- (2). DCR measured at 25°C.
- (3). The DC current at which the inductance decreases by 30% from its initial value.
- (4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.