


1745-DIMMER SWITCH MODULE

MDSP SWITCH MODULE GENERAL ELECTRICAL & MECHANICAL SPECIFICATION

RoHS COMPLIANT


Rating:	10A @ 250Vac (resistive)
Life:	>25,000 Cycles
Operating Temperature:	-25 ° C to +100 ° C
Proof voltage:	2.5KVac (Initial)
Insulation Resistance:	<999MΩ @ 500V dc (Initial)
1 Pole Changeover:	Push on/Push off
Housing:	Polyamide 6.6 G.F. V0 Rated
Wafer:	Polyamide 6.6 G.F. V0 Rated
Plunger:	Polyamide 6.6 G.F. V0 Rated
Contacts:	Silver Cadmium Oxide
Rotor Contacts:	Silver Cadmium Oxide
Terminals	Brass CZ108 Sn Plated

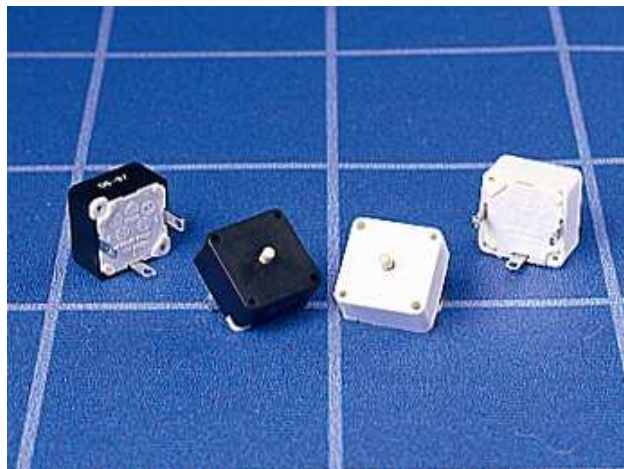

GENERAL FEATURES

- Made in UK.
- Solder Terminals.
- Approved to EN61058 ENEC by VDE

MDSP SWITCH MODULE

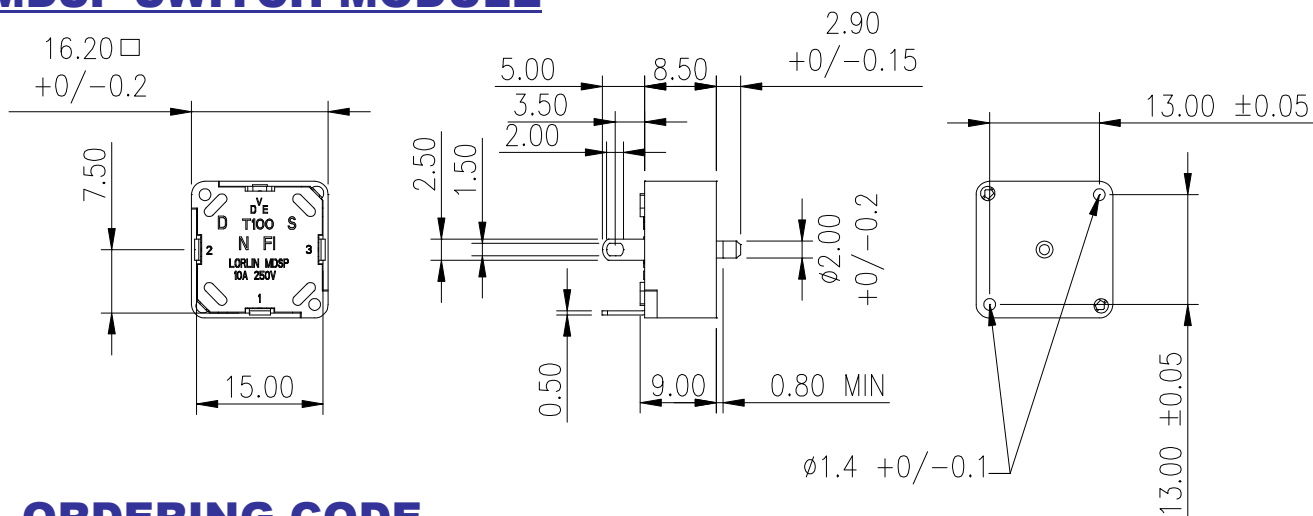

ORDERING CODE

ORDERING CODE	SWITCH FORCE	COLOUR IDENTIFICATION		
		HOUSING	WAFER	PLUNGER
1745-501S	7-9 N	BLACK	NATURAL	NATURAL
1745-505S	3.5-4.5 N	NATURAL	NATURAL	NATURAL