


Style S



Style NV



Style C



RoHS

Single Primary, Multiple Secondaries

All Primaries 50/60 Hz.

Sec.	STANCOR PART NUMBER	Style	Secondary		Primary Volts	Insulation Test RMS Volts	Termination		DIMENSIONS-INCHES					Weight (lbs.)	Agency Certif.
			Volts	Amps			Primary	Secondary	H	Case W	D	Mounting MW	MD		
A	P-6429†	C	6.3 6.3 6.3 C.T.	3.50 3.50 3.50	117	2500	Leads	Leads	3.88	3.13	3.63	2.50	2.22	4.80	-
	P-8361	S	12.0 12.0 12.0 C.T.	0.10 0.10 0.10	117	1500	Leads	Leads	1.75	2.00	1.50	1.72	-	0.36	-
B	P-8362	S	12.0 12.0 12.0 C.T.	0.15 0.15 0.15	117	1500	Leads	Leads	2.00	2.38	1.75	2.00	-	0.60	-
	P-8364	S	12.0 12.0 12.0 C.T.	0.50 0.50 0.50	117	1500	Leads	Leads	2.38	2.88	2.13	2.38	-	1.25	-

† Has Electrostatic Shield

For outline drawings refer to page 12.

Dual Primary, Dual Secondary


(Primaries 115/230 Volts 50/60 Hz.—Solder Lug Termination)

SEC.	STANCOR PART NUMBER	Style	Schem.	VA Cap.	Output from Two Secondary Windings					DIMENSIONS-INCHES					Weight (lbs.)	Agency Certification	
	Individually Volts				Amp	Parallel Volts	Amp	Series Volts	Amp	H	Case W	D	Mounting MW	MD			
C	P-6375	S	2	12	6 @ 1.00		6 @ 2.0		12 @ 1.00		2.38	2.88	1.75	2.38	-	1.0	
	P-6376	S	2	24	6 @ 2.00		6 @ 4.0		12 @ 2.00		2.75	3.13	2.00	2.81	-	1.5	
	P-6377	S	1	48	12 @ 2.00		12 @ 4.0		24 @ 2.00		3.13	3.63	2.25	3.13	-	2.5	
	P-6378	NV	1	96	12 @ 4.00		12 @ 8.0		24 @ 4.00		3.50	2.81	3.25	2.25	2.31	4.2	
	P-6379	NV	1	192	12 @ 8.00		12 @ 16.0		24 @ 8.00		4.25	3.44	3.62	2.75	3.13	8.0	
D	P-8615	S	2	12	24 @ 0.25		24 @ 0.5		48 @ 0.25		2.38	2.88	1.75	2.38	-	1.0	
	P-8616	S	2	24	24 @ 0.50		24 @ 1.0		48 @ 0.50		2.75	3.13	2.00	2.81	-	1.5	
	P-8617	S	1	48	24 @ 1.00		24 @ 2.0		48 @ 1.00		3.13	3.63	2.25	3.13	-	2.5	
	P-8618	NV	1	96	24 @ 2.00		24 @ 4.0		48 @ 2.00		3.50	2.81	3.25	2.25	2.31	4.2	
	P-8619	NV	1	192	24 @ 4.00		24 @ 8.0		48 @ 4.00		4.25	3.44	3.62	2.75	3.13	8.0	

* Agency Certification Note: UL Recognized (File E68100, Guide #XPTQ2)

For outline drawings refer to page 12.

Schematic 1

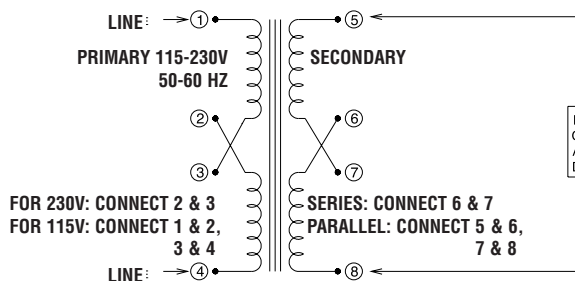

Schematic 2

