

# PRINTED CIRCUIT TRANSFORMERS

## Plug-In Printed Circuit Series



\* Agency Certification Note: UL Recognized (File E68100)

All Single Primaries are 115V 50/60Hz, 6 Pins

All Dual Primaries are 115/230V 50/60Hz, 8 Pins

PC Type




APC Type




RoHS

| Sec. | STANCOR<br>PART<br>NUMBER | Style | Primary<br>Winding | VA   | Rated Output        |      |                 |           |                   |      | DIMENSIONS - INCHES |      |      |      |      |   |      | Weight<br>(lbs.) | Agency<br>Certif. |                                                                                     |
|------|---------------------------|-------|--------------------|------|---------------------|------|-----------------|-----------|-------------------|------|---------------------|------|------|------|------|---|------|------------------|-------------------|-------------------------------------------------------------------------------------|
|      | AC/DC                     |       |                    |      | Individual<br>Volts | mA   | Series<br>Volts | mA        | Parallel<br>Volts | mA   | H                   | W    | L    | ML   | A    | B | C    |                  |                   |                                                                                     |
| A    | PPC-1                     | PC    | Single             | 1.5  | AC                  | 4.0  | 188             | 8.0 C.T.  | 188               | 4.0  | 376                 | 1.19 | 1.41 | 1.16 | -    | - | 0.31 | 1.00             | 0.22              |  |
|      | PPC-2                     | PC    | Single             | 1.5  | AC                  | 7.5  | 100             | 15.0 C.T. | 100               | 7.5  | 200                 | 1.19 | 1.41 | 1.16 | -    | - | 0.31 | 1.00             | 0.22              |  |
|      | PPC-46                    | PC    | Dual               | 1.5  | AC                  | 7.5  | 100             | 15.0 C.T. | 100               | 7.5  | 200                 | 1.19 | 1.41 | 1.16 | -    | - | 0.20 | 1.00             | 0.22              |  |
|      | PPC-3                     | PC    | Single             | 1.5  | AC                  | 15.0 | 50              | 30.0 C.T. | 50                | 15.0 | 100                 | 1.19 | 1.41 | 1.16 | -    | - | 0.31 | 1.00             | 0.22              |  |
|      | PPC-8                     | PC    | Dual               | 1.5  | AC                  | 15.0 | 50              | 30.0 C.T. | 50                | 15.0 | 100                 | 1.19 | 1.41 | 1.16 | -    | - | 0.20 | 1.00             | 0.22              |  |
| B    | PPC-18                    | APC   | Dual               | 4.5  | AC                  | 6.3  | 350             | 12.6 C.T. | 350               | 6.3  | 700                 | 1.44 | 2.38 | 1.25 | 2.00 | - | 0.25 | 1.10             | 0.47              |  |
|      | PPC-19                    | APC   | Dual               | 4.5  | AC                  | 8.0  | 280             | 16.0 C.T. | 280               | 8.0  | 560                 | 1.44 | 2.38 | 1.25 | 2.00 | - | 0.25 | 1.10             | 0.47              |  |
| C    | PPC-20                    | APC   | Dual               | 4.5  | AC                  | 12.0 | 180             | 24.0 C.T. | 180               | 12.0 | 360                 | 1.44 | 2.38 | 1.25 | 2.00 | - | 0.25 | 1.10             | 0.47              |  |
|      | PPC-17                    | APC   | Single             | 4.5  | AC                  | 20.0 | 112             | 40.0 C.T. | 112               | 20.0 | 224                 | 1.44 | 2.38 | 1.25 | 2.00 | - | 0.40 | 1.10             | 0.47              |  |
|      | PPC-14                    | APC   | Single             | 4.5  | AC                  | 27.0 | 84              | 54.0 C.T. | 84                | 27.0 | 168                 | 1.44 | 2.38 | 1.25 | 2.00 | - | 0.40 | 1.10             | 0.47              |  |
| D    | PPC-23                    | APC   | Single             | 7.5  | AC                  | 15.0 | 250             | 30.0 C.T. | 250               | 15.0 | 500                 | 1.63 | 2.81 | 1.47 | 2.38 | - | 0.40 | 1.30             | 0.66              |  |
|      | PPC-58                    | PC    | Dual               | 24.0 | AC                  | 12.0 | 1000            | 24.0 C.T. | 1000              | 12.0 | 2000                | 1.44 | 1.63 | 2.31 | -    | - | 0.25 | 2.11             | 0.90              |  |


PC Style (Single)

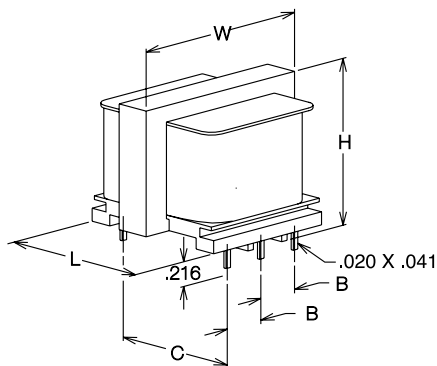


PC Style (Dual)

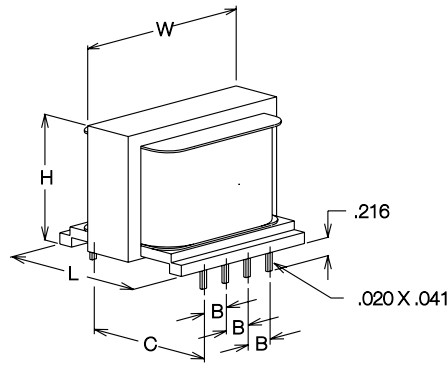


APC Style (Single)

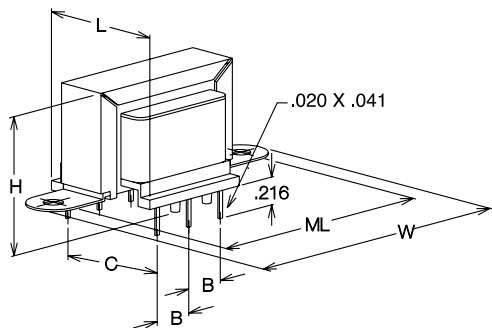

APC Style (Dual)

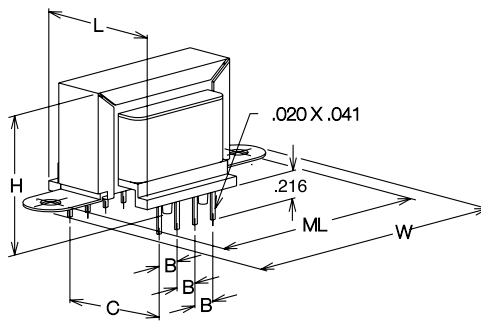

Single Input

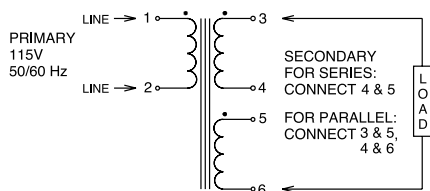

Dual Input

