
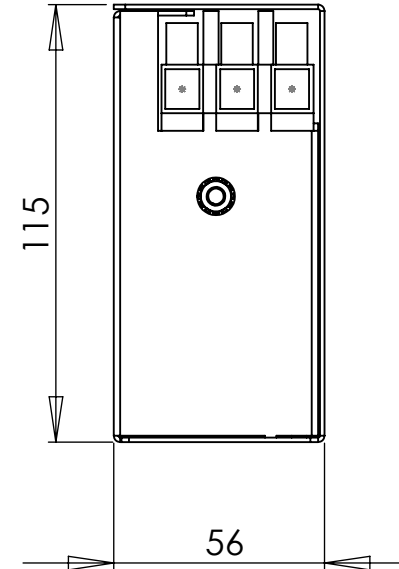
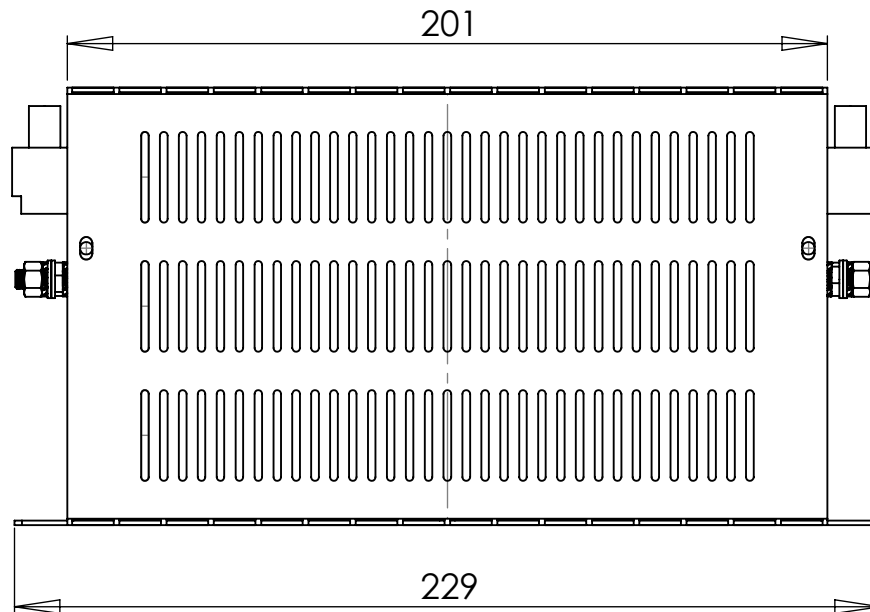



REV.	CNN	CNN DESCRIPTION	Date	Check in
02	-	border change	19/01/2010	Shaun Barron

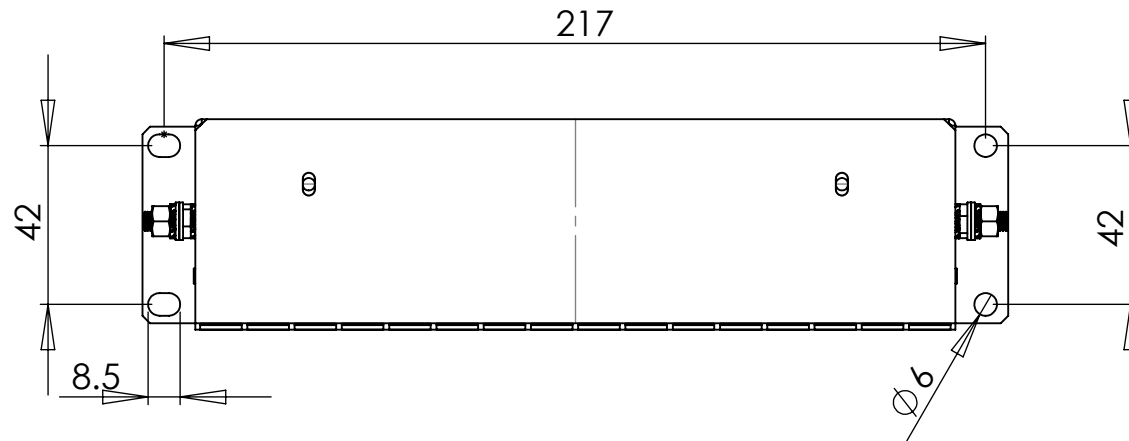

SPECIFICATIONS

VOLTAGE 600Vac
 FREQUENCY 50/60Hz
 CURRENT 18A @ 40 °C
 TEMPERATURE -25 TO 100 °C
 LEAKAGE (FAULT) 178mA @ 600V 50Hz
 HUMIDITY 90% RH (NON-CONDENSING)
 VIBRATION 10-200Hz 1.8G
 ELECTRIC STRENGTH 3150 Vdc/1min.
 POWER DISSIPATION 11W
 MASS 1.1kg
 TERMINALS 6sqmm TERMINAL BLOCK
 EARTH TERMINALS M5 STUD
 FLANGE MOUNTING 4x M5

RoHS
2002/95/EC
Compliant

Tel No. +44(0)1724 273200 Website www.dem-uk.com



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 ALPHA 3 MANUFACTURING.
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
 ALPHA 3 MANUFACTURING IS PROHIBITED.



UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETRES
 LINEAR TOLERANCE:
 NO DECIMAL PLACES $\pm 0.5\text{mm}$
 1 DECIMAL PLACE $\pm 0.25\text{mm}$
 2 DECIMAL PLACES $\pm 0.125\text{mm}$
 ANGULAR TOLERANCE: $\pm 1^\circ$

FINISH STANDARD FILTER
 -
 DEBURR AND BREAK SHARP EDGES
 IF IN DOUBT ASK
 DO NOT SCALE DRAWING
 MATERIAL -

DRAWN BY S BARRON
 APPROVED BY SW
 THIRD ANGLE PROJECTION
 SHEET 1 OF 1
 SCALE 1:2
 A4

TITLE GENERAL SPECIFICATION
 3 PHASE 18A 600V
 INDUSTRIAL FILTER
 DRAWING NO. KMF318V
 ISSUE 02
 Release