


REV.	CNN	CNN DESCRIPTION	Date	Check in
04	-	-	02/12/2011	John Hutchinson

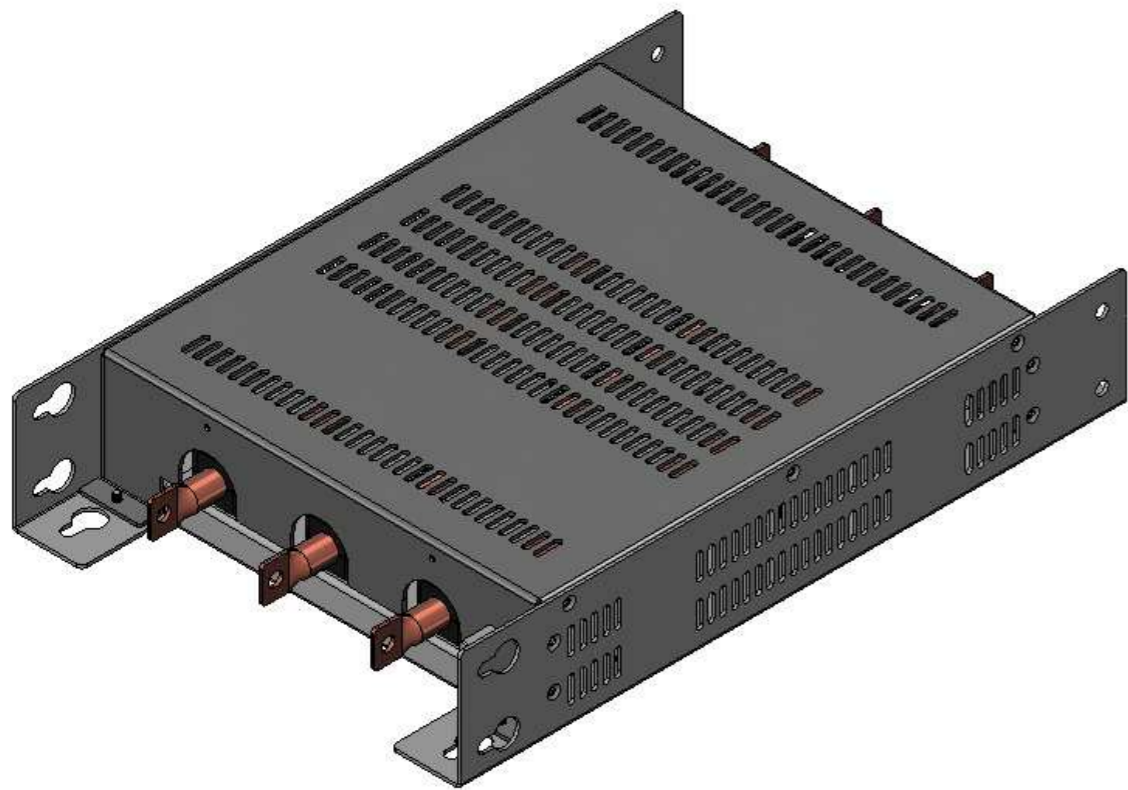


3PZ 480V 400A BUSBAR FILTER SHORT

current rated 400A @40°C
current leakage 2152mA
current scct 30kA
frequency dc-60Hz
humidity 90% RH non-condensing
pollution class II
protection mov 6.5kA 8/20us
resistance dc 61uR/ph
resistance insulation >2MR w/out bleed
resistance loss 30W
temperature rated -25 to +90°C
vibration 10-150Hz 10m/s² 2.3hrs
voltage rated 480V +10%
voltage test 1kVdc 15s
voltage residual 615V@5s, 0V@270s
voltage withstand 2.9kVdc w/out mov

cooling air ventilation ≥50mm gap
earthing stud SS M10 25Nm
enclosure 3103 H14 Aluminium 3mm
mass unpackaged 14kg
mounting 580x360(62)mm M12 30Nm
terminal Cu 35x3.5mm C106 M12 30Nm

Approvals CE cULus
European EN60939 EN50178
North American UL1283 UL1449
Canadian C22.2 No.8

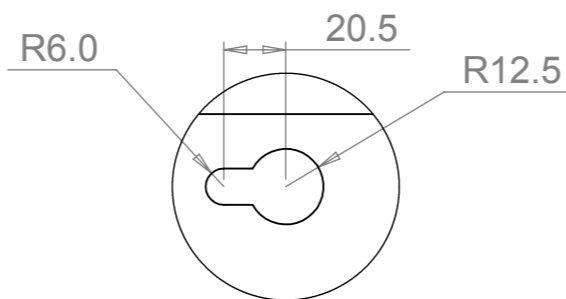

DETAIL A
SCALE 2 : 5

