
This side stackable plug has a screw connection for the lead wire and a push-on pliable PVC moulding. The conductor and outside diameter cable entry sizes are designed to suit PVC or silicone rubber flexible test cables up to 2,5mm².

Dimensions

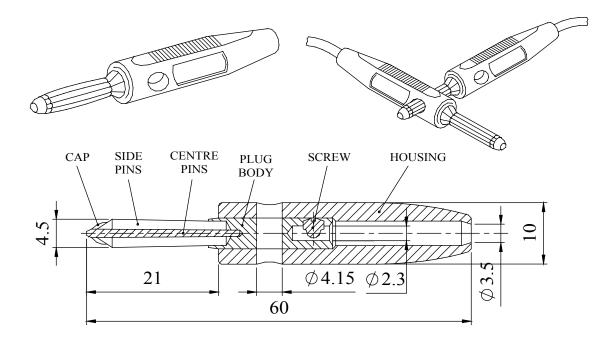

MATERIAL CAP: Brass

SIDE PINS : Brass CENTRE PIN : Brass PLUG BODY : Brass

HOUSING: PVC 36/20(000-050-0000)

SCREW: Brass, M3,5x0,6

RATING: 16 Amps RATED VOLTAGE: 50V

COLOUR	ORDER CODE
BLACK	555-0100
BLUE	555-0200
BROWN	555-0300
GREEN	555-0400
RED	555-0500
WHITE	555-0600
YELLOW	555-0700

BUNCH PIN SIDE STACKABLE PLUG



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF

AUPHA 3 MANUFACTURING.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF

DEM Manufacturing, Deltron Emcon House
Hargreaves Way, Sawciffe Ind. Park,
Scintbarne, North Liscolability, DNJ 5.8PE LIK

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETRES
LINEAR TOLERANCE:
NO DECIMAL PLACE: 20.5mm
1 DECIMAL PLACE: 20.25mm
2 DECIMAL PLACE: 20.125mm

ANGULAR TOLERANCE: +1°

FINISH SEE NOTE

IF IN DOUBT ASK
DO NOT SCALE DRAWING

MATERIAL SEE NOTE

DEBURR AND BREAK
SHARP EDGES
APPROVED
THIRD ANGLE PRO

DRAWN BY SPB
APPROVED BY WC
THIRD ANGLE PROJECTION SHEET 1 OF 1
SCALE 1:1
A4

GENERAL SPECIFICATION
555 SERIES
BUNCH PIN SIDE STACKABLE PLUG
DRAWING NO.
555 SERIES

Release