
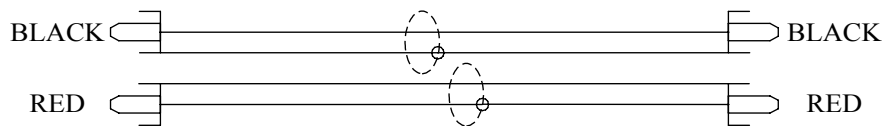


An interconnection lead comprising of two, nickel plated phono plugs to two, nickel plated phono plugs, each with strain relief. The phono leads are colour coded and the assembly is manufactured from twin, screened, grey PVC cable.

Dimensions

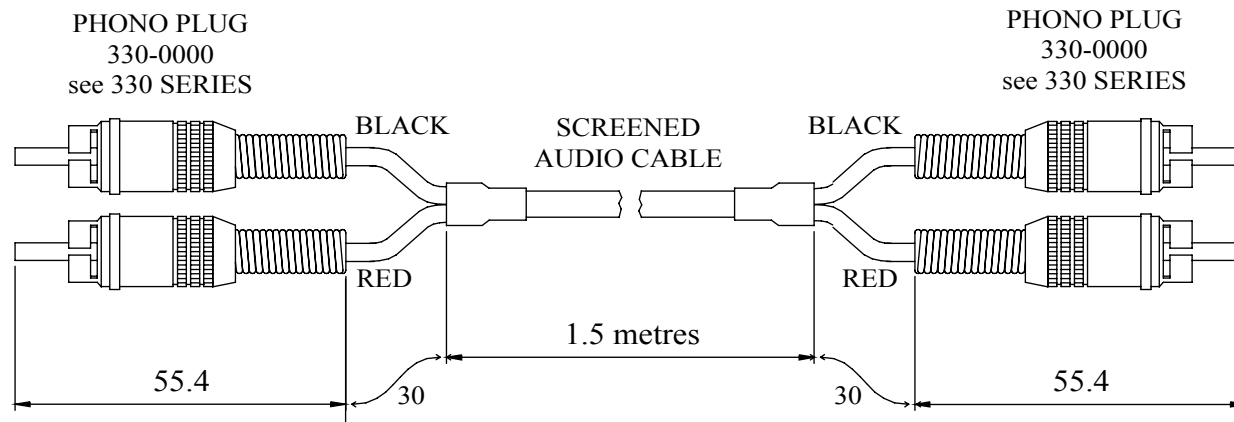

TWIN SCREENED CABLE

CABLE (MECHANICAL)

JACKET : Ø 2,7mm x 5.3mm PVC,
two parallel cores, grey
INSULATION : Ø 1,25mm PE
CONDUCTORS : 18 x Ø 0,1mm Copper

CABLE (ELECTRICAL)

COND. RESIST. : 148 Ohm/Km
CAPACITANCE : 150 nF/Km
INSUL. RESIST. : > 1 GigaOhm/Km
TEST VOLTAGE : 800 Vrms
RATED VOLTAGE : 50 V
TEMP. RANGE : -25°C to +70°C

Tel No. +44(0)1724 273200 Website www.dem-uk.com

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALPHA 3 MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ALPHA 3 MANUFACTURING IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETRES
LINEAR TOLERANCE:
NO DECIMAL PLACES ±0.5mm
1 DECIMAL PLACE ±0.25mm
2 DECIMAL PLACES ±0.125mm
ANGULAR TOLERANCE: ±1°

FINISH PHONO PLUG TO PHONO PLUG LEADS
DEBURR AND BREAK SHARP EDGES
IF IN DOUBT ASK
DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

DRAWN BY

SPB

APPROVED BY

WC

SCALE 1:1

SHEET 1 OF 1

A4

DRAWING NO.

TITLE GENERAL SPECIFICATION FOR 093-0600

093-0600

ISSUE 02
Release

Alpha3 manufacturing

ROXBURGH EMC

bes Media

DELTRON Components

DELTRON Enclosures

DEM

DEM Manufacturing, Deltron Emcon House
Hargreaves Way, Sawcliffe Ind. Park,
Scunthorpe, North Lincolnshire, DN15 8RF, UK