

Power For The New Technology

PS2444-YE

Total Power	1200 Watts
Input Voltages	90 to 264 VAC
Outputs	12V @ 100A 5V @ 2A

SPECIAL FEATURES

- Efficiency 85% @ low line, 89% @ high line
- Compact 1U design
- N+1 redundant
- Hot pluggable
- Current sharing
- I²C Interface
- Fan speed monitoring
- 5V @ 2A (1.5A at 55°C) standby output

ENVIRONMENTAL

Ambient Operating Temperature: 0 to +55°C

Humidity: Up to 95% non-condensing

Temperature coefficient: $\pm 0.01\%$ / °C

Storage Temperature: -20°C to +65°C

Cooling: Two 15 CFM fans. Airflow from front to back.



ELECTRICAL SPECIFICATIONS

Input

90Vac – 264Vac

Cold start-up @ 264Vac.....< 50 Amps peak

Isolation.....2121 VDC (Input to Chassis)
4242 VDC (Input to Output)

Susceptibility specifications:

Complies with EN55022 & FCC Class A

Output

DC Output.....Maximum continuous output power 1200W
with internal cooling. See Voltage/Current Rating Chart.

Load Regulation.....< 3% for 12V output

.....< 2.5% for 5V output

Ripple and Noise.... 1% for 12V output, 0.1V for 5V output

Transient Response....4% Maximum deviation;

Third Wire Current Sharing for 12V output;

MECHANICAL

11.23"L X 1.6"H X 5.6"W (285.2 mm X 40.4 mm X 141.2 mm)

Input connector: Standard 16A/20A AC connector

Output connector: FCI 51732-026LF

Status signals and indicators

Input GOOD

Output GOOD

Over temperature/Fan fail

PS PRESENT

Visual LED indicators identify power supply status.

The indicators are:

Power Fail (Green)

Output Good (Green)

Fan Fail and Over temperature (Amber)



Power For The New Technology

Output

Over voltage protection – For 12V output 110 - 135%
(Latching)

Over temperature protection.

Short circuit Protection.....Will withstand a
continuous short without damage.

Minimum Load Rqmt...0% of full load 12V output.
0% of full load 5V output.

Hold-Up Time.....20 ms typical

Voltage/Current Rating Chart

Voltage	Current Minimum	Current Maximum
12V	0A	100A
5V	0A	2A




Power For The New Technology

FCI Output Connector PIN Assignment

Output Connector Description	PIN Location
Over Temp/Fan Fail	U1
DC Fail /Power Down Warning	U2
PS Present	U3
DC Fail/Output Voltage Fault (DC OK)	U4
Internal GND	U5
ADDR0, I ² C address bus	T1
ADDR1, I ² C address bus	T2
ADDR2, I ² C address bus	13
N.U.	T4
N.U.	T5

Output Connector Description	PIN Location
DATA, I ² C data line	S1
Clock, I ² C clock line	S2
Aux. Power +5V	S3
Aux. Power GND	S4
Logic GND	S5
Output Inhibit	E1
N.U.	R2
V Sense -	R3
N.U.	R4
Current Share	R5
V _{O1} -	P1,P3,P5,P7, P9,P11
V _{O1} +	P2,P4,P6,P8, P10,P12

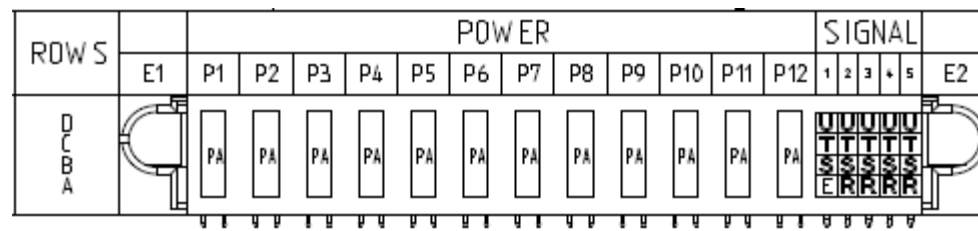

Power For The New Technology

Mechanical Outline

