




Product Description

The R1005250L is a hybrid reverse amplifier. The part employs a silicon die. It has extremely low distortion and superior return loss performance. The part also provides optimal reliability with low noise and is well suited for 5 MHz to 100 MHz CATV amplifiers for reverse channel systems.

Optimum Technology Matching® Applied

- ☐ GaAs HBT
- ☐ GaAs MESFET
- ☐ InGaP HBT
- ☐ SiGe BiCMOS
- ☐ Si BiCMOS
- ☐ SiGe HBT
- ☐ GaAs pHEMT
- ☐ Si CMOS
- ☒ Si BJT
- ☐ GaN HEMT
- ☐ RF MEMS

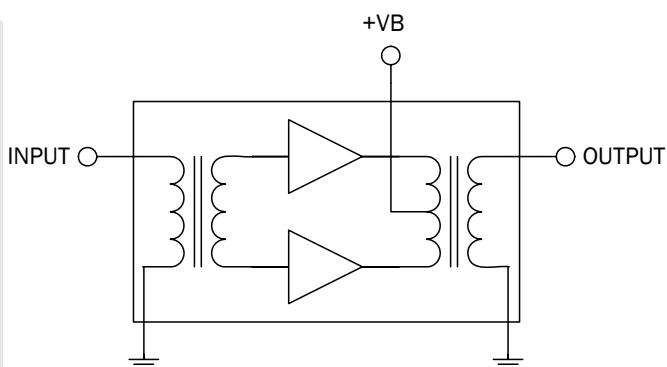

Features

- Excellent Linearity
- Superior Return Loss Performance
- Extremely Low Distortion
- Optimal Reliability
- Low Noise
- Unconditionally Stable Under All Terminations
- 25.5dB Typ. Gain at 100MHz
- 140mA Max. at 24VDC

Applications

- 5 MHz to 100MHz CATV Amplifier For Reverse Channel Systems

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Overall					S-Paramter, Noise Figure, DC Current, $V_B = 24V$; $T_{MB} = 30^\circ C$; $Z_S = Z_L = 75\Omega$
Power Gain	24.8	25.3	25.8	dB	$f = 5\text{ MHz}$
	24.6	25.5		dB	$f = 100\text{ MHz}$
Slope ^[1]	-0.2	0.2	0.5	dB	$f = 5\text{ MHz to } 100\text{ MHz}$
Flatness of Frequency Response			± 0.3	dB	$f = 5\text{ MHz to } 100\text{ MHz}$
Input Return Loss	20.0			dB	$f = 5\text{ MHz to } 100\text{ MHz}$
Output Return Loss	20.0			dB	$f = 5\text{ MHz to } 100\text{ MHz}$
Noise Figure		2.7	3.4	dB	$f = 100\text{ MHz}$
Total Current Consumption (DC)	130.0	133.0	140.0	mA	

1. The slope is defined as the difference between the gain at the start frequency and the gain at the stop frequency.

Absolute Maximum Ratings

Parameter	Rating	Unit
RF Input Voltage (single tone)	65	dBmV
DC Supply Over-Voltage (5 minutes)	30	V
Storage Temperature	-40 to +100	°C
Operating Mounting Base Temperature	-30 to +100	°C



Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

RoHS status based on EU Directive 2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

Distortion data 5MHz to 100MHz					
CTB			-69	dBc	7 ch flat; $V_0 = 50 \text{ dBmV}^{[2]}$
			-65	dBc	12 ch flat; $V_0 = 50 \text{ dBmV}^{[3]}$
XMOD			-59	dBc	7 ch flat; $V_0 = 50 \text{ dBmV}^{[2]}$
			-55	dBc	12 ch flat; $V_0 = 50 \text{ dBmV}^{[3]}$
CSO			-70	dBc	7 ch flat; $V_0 = 50 \text{ dBmV}^{[2]}$
			-70	dBc	12 ch flat; $V_0 = 50 \text{ dBmV}^{[3]}$
d_2			-71	dBc	[4]
STB			-70	dBc	[5]

2. 7 channels, US frequency raster: T7-T13 (7.0MHz to 43.0MHz), +50dBmV flat output level.

3. 12 channels, US frequency raster: T7-T13 (7.0MHz to 43.0MHz), 2-6 (55.25MHz to 83.25MHz), +50dBmV flat output level.


4. $f_1 = 7 \text{ MHz}$; $V_1 = 50 \text{ dBmV}$; $f_2 = 25 \text{ MHz}$; $V_2 = 50 \text{ dBmV}$; $f_{\text{TEST}} = f_1 + f_2 = 32 \text{ MHz}$.

5. $f_1 = 13 \text{ MHz}$; $V_1 = 50 \text{ dBmV}$; $f_2 = 25 \text{ MHz}$; $V_2 = V_1 - 6 \text{ dB}$; $f_3 = 7 \text{ MHz}$; $V_3 = V_1 - 6 \text{ dB}$; $f_{\text{TEST}} = f_1 + f_2 - f_3 = 31 \text{ MHz}$, according to DIN45004B.

Composite Second Order (CSO) - The CSO parameter (both sum and difference products) is defined by the NCTA.

Composite Triple Beat (CTB) - The CTB parameter is defined by the NCTA.

Cross Modulation (XMOD) - Cross modulation (XMOD) is measured at baseband (selective voltmeter method), referenced to 100% modulation of the carrier being tested.

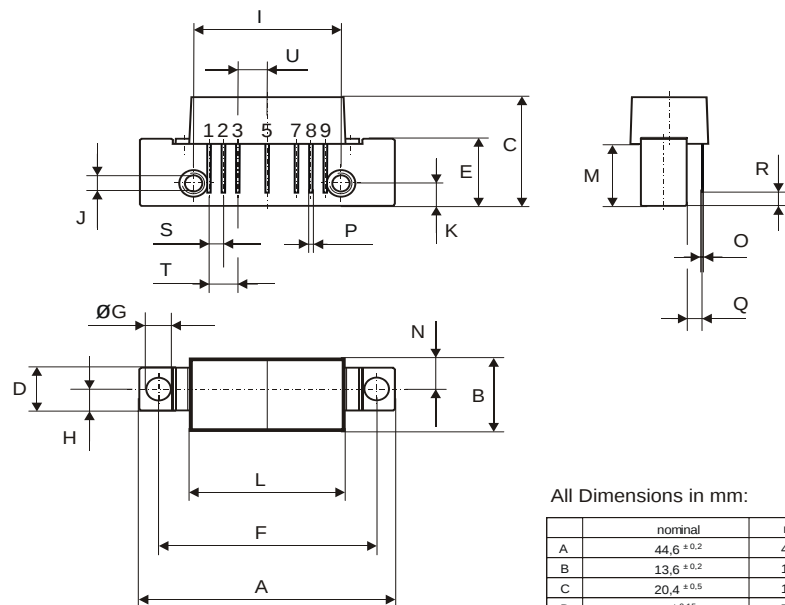


0 5 10mm
scale

Pinning:

	1	2	3	4	5	6	7	8	9
INPUT									
GND									
GND									
V/B									
GND									
GND									
OUTPUT									

Notes:



All Dimensions in mm:

	nominal	min	max
A	44,6 $\pm 0,2$	44,4	44,8
B	13,6 $\pm 0,2$	13,4	13,8
C	20,4 $\pm 0,5$	19,9	20,9
D	8 $\pm 0,15$	7,85	8,15
E	12,6 $\pm 0,15$	12,45	12,75
F	38,1 $\pm 0,2$	37,9	38,3
G	4 $+0,2 / -0,05$	3,95	4,2
H	4 $\pm 0,2$	3,8	4,2
I	25,4 $\pm 0,2$	25,2	25,6
J	UNC 6-32	-	-
K	4,2 $\pm 0,2$	4,0	4,4
L	27,2 $\pm 0,2$	27,0	27,4
M	11,6 $\pm 0,5$	11,1	12,1
N	5,8 $\pm 0,4$	5,4	6,2
O	0,25 $\pm 0,02$	0,23	0,27
P	0,45 $\pm 0,03$	0,42	0,48
Q	2,54 $\pm 0,3$	2,24	2,84
R	2,54 $\pm 0,5$	2,04	3,04
S	2,54 $\pm 0,25$	2,29	2,79
T	5,08 $\pm 0,25$	4,83	5,33
U	5,08 $\pm 0,25$	4,83	5,33

R1005250L