


Package: Module, 22.86mmx22.86mmx13.97mm



### Features

- 2000MHz to 3200MHz VCO
- 15V Operation
- +12.5dBm Typical Output Power
- -85dBc/Hz at 10kHz
- -105dBc/Hz at 100kHz
- -128dBc/Hz at 1000kHz

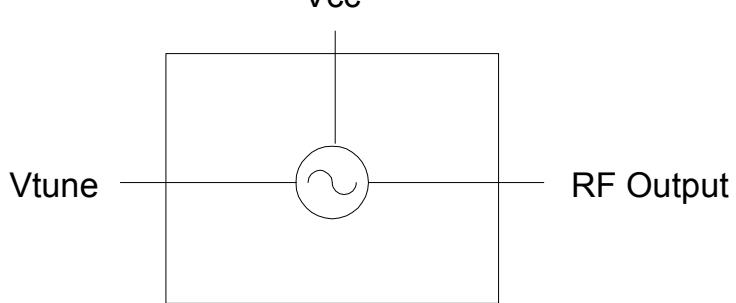

Functional Block Diagram

### Applications

- Instrumentation
- Aerospace
- Test Equipment
- Plug and Play

### Product Description

RFMD's VCO-112S/STC is a hybrid assembled voltage controlled oscillator integrated into a connectorized module. The VCO-112 features an integrated resonator and tuning varactors. The part features excellent performance over temperature.

### Ordering Information

VCO-112S/STC      High Reliability Military and Space VCO

### Optimum Technology Matching® Applied

<input type="checkbox"/> GaAs HBT	<input type="checkbox"/> SiGe BiCMOS	<input type="checkbox"/> GaAs pHEMT	<input type="checkbox"/> GaN HEMT
<input type="checkbox"/> GaAs MESFET	<input type="checkbox"/> Si BiCMOS	<input type="checkbox"/> Si CMOS	<input type="checkbox"/> BIFET HBT
<input type="checkbox"/> InGaP HBT	<input type="checkbox"/> SiGe HBT	<input checked="" type="checkbox"/> Si BJT	<input type="checkbox"/> LDMOS

RF MICRO DEVICES®, RFMD®, Optimum Technology Matching®, Enabling Wireless Connectivity™, PowerStar®, POLARIS™ TOTAL RADIO™ and UltimateBlue™ are trademarks of RFMD, LLC. BLUETOOTH is a trademark owned by Bluetooth SIG, Inc., U.S.A. and licensed for use by RFMD. All other trade names, trademarks and registered trademarks are the property of their respective owners. ©2006, RF Micro Devices, Inc.

## Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Voltage ( $V_{CC}$ )	17	V
$V_{TUNE}$	0 to 22	V
Storage Temperature	-65 to 150	°C
Operating Temperature	-55 to 100	°C
ESD JESD22 - A114 Human Body Model (HBM)		V



**Caution!** ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.


RoHS status based on EU Directive 2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
<b>Frequency</b>					
Frequency Range	2000		3200	MHz	100% Production Tested
Tuning Voltage					
2000MHz	0	1.5		$V_{DC}$	100% Production Tested
3200MHz		18.0	20	$V_{DC}$	100% Production Tested
Tuning Sensitivity					
2000MHz	44	58	73	MHz/V	100% Production Tested
2300MHz	55	73	92	MHz/V	100% Production Tested
2600MHz	106	142	178	MHz/V	100% Production Tested
2900MHz	65	87	109	MHz/V	100% Production Tested
3200MHz	35	47	59	MHz/V	100% Production Tested
Output Power	10	12.5	16	dBm	100% Production Tested
Output Phase Noise					
10kHz		-85	-79	$dBc/Hz$	100% Production Tested
100kHz		-105	-99	$dBc/Hz$	100% Production Tested
1000kHz		-128	-122	$dBc/Hz$	100% Production Tested
Power Supply	14.75	15	15.25	V	100% Production Tested
Supply Current		19	22.0	mA	100% Production Tested
Harmonic Suppression					
2nd Harmonic		-15	-10	$dBc$	100% Production Tested
3rd Harmonic		-18	-10	$dBc$	100% Production Tested
Spurious (Non-Harmonic)			-80	$dBc$	
Frequency Pushing		1	2.5	MHz p-p	14.75V to 15.25V
Frequency Pulling		40	50	MHz p-p	20dB RL
Output Impedance		50		$\Omega$	
3dB Modulation Bandwidth	20000	35000		kHz	$Z_G=50\Omega$
Tune Port Impedance		50		$k\Omega$	

Pin	Function	Description
<b>1</b>	<b>VTUNE</b>	Tuning voltage.
<b>2</b>	<b>VCC</b>	Supply voltage.
<b>3</b>	<b>RF Output</b>	VCO RF output.

### Pin Out and Package Drawing

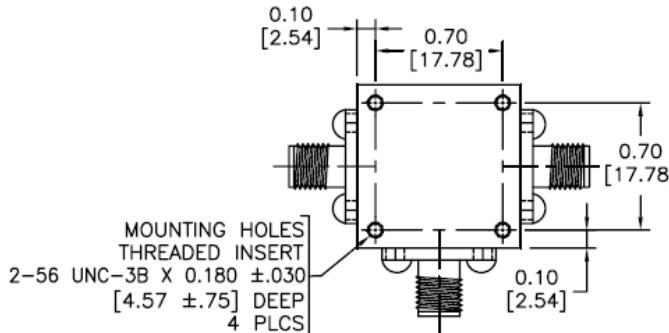

PINOUT	FUNCTION			
	PIN	VCO	MIXER	POWER DIVIDER
1	TUNING VOLTAGE	RF PORT	OUT 2	
2	SUPPLY VOLTAGE	X PORT	IN	
3	RF OUTPUT	LO PORT	OUT 1	

