




### Features

- -132 dBc/Hz Typical at 100 kHz Offset
- $P_{OUT}$  0 dBm Typical
- 7.4V Supply
- 25mA Current Consumption
- Low Profile 6mmx6mm Package

### Applications

- 2G, 3G, and 4G (LTE and WiMAX) Cellular Base Stations
- High Performance Transceiver Applications

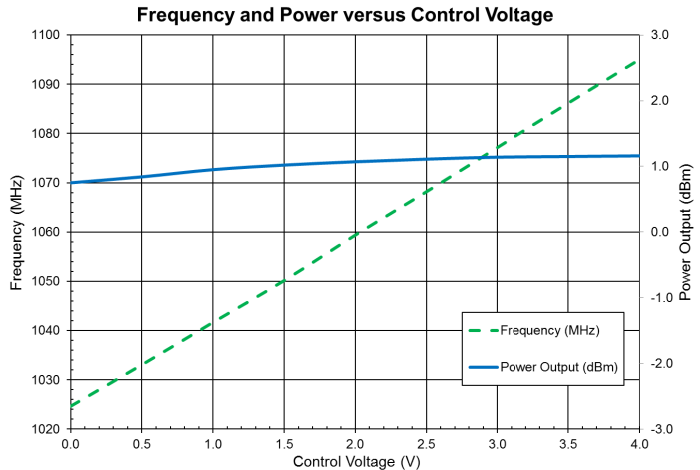

### Product Description

The RFVC9752 is a Voltage Controlled Oscillator (VCO) designed for high performance transceiver applications. It offers phase noise performance that meets or exceeds the requirements of 2G, 3G, and 4G (LTE and WiMAX) cellular base stations. Compared to the current generation of monolithic VCOs, the RFVC9752 provides improved phase noise and lower current consumption thereby lowering energy consumption and improving base station thermal management. The RFVC9752 is also 75% smaller than today's signal source modules, while providing the same low phase noise performance, satisfying the trend toward smaller base station sizes for microcells and remote radio heads.

### Ordering Information

RFVC9752SQ	Sample bag with 25 pieces
RFVC9752SR	7" Sample reel with 100 pieces
RFVC9752TR7	7" Reel with 750 pieces
RFVC9752TR13	13" Reel with 2500 pieces
RFVC9752PCK-410	1052 MHz to 1086 MHz PCBA with 5-piece sample bag

### Optimum Technology Matching® Applied

<input type="checkbox"/> GaAs HBT	<input type="checkbox"/> SiGe BiCMOS	<input type="checkbox"/> GaAs pHEMT	<input type="checkbox"/> GaN HEMT
<input type="checkbox"/> GaAs MESFET	<input type="checkbox"/> Si BiCMOS	<input type="checkbox"/> Si CMOS	<input type="checkbox"/> BIFET HBT
<input type="checkbox"/> InGaP HBT	<input type="checkbox"/> SiGe HBT	<input type="checkbox"/> Si BJT	<input type="checkbox"/> LDMOS

## Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Voltage ( $V_{CC}$ )	8.4	V
Control Voltage	0 to 9	V
DC Voltage on RF Out	20	V
Operating Temperature Range ( $T_L$ )	-40 to +85	°C
Storage Temperature	-55 to +125	°C
ESD Rating - Human Body Model (HBM)	Class 3A (4000V)	
Moisture Sensitivity Level	3	

**Caution!** ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.







The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.




RFMD Green: RoHS compliant per EU Directive 2002/95/EC, halogen free per IEC 61249-2-21, < 1000ppm each of antimony trioxide in polymeric materials and red phosphorus as a flame retardant, and <2% antimony in solder.

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Frequency	1052		1086	MHz	
Tuning Voltage	1.0		3.9	V	
Tuning Sensitivity	14.4	17	19.6	MHz/V	
Output Power	-2.5	0.0	2.5	dBm	
2nd Harmonic			-10	dBc	
SSB Phase Noise at 1kHz Offset		-85	-81	dBc/Hz	
SSB Phase Noise at 10kHz Offset		-112	-108	dBc/Hz	
SSB Phase Noise at 100kHz Offset		-132	-128	dBc/Hz	
SSB Phase Noise at 800kHz Offset		-151	-147	dBc/Hz	
SSB Phase Noise at 1200kHz Offset		-155.5	-149	dBc/Hz	
Power Supply	7.3	7.4	7.5	V	
Supply Current		23	26	mA	
Frequency Pushing		0.27	1	MHz/V	
Frequency Pulling (2:1 VSWR)		0.2	1	MHz, p-p	


## Typical Evaluation Board Performance ( $V_{CC}=7.4V$ )

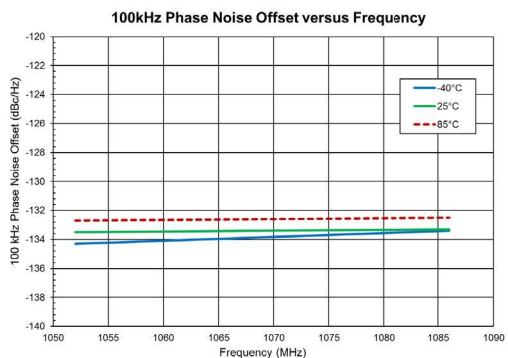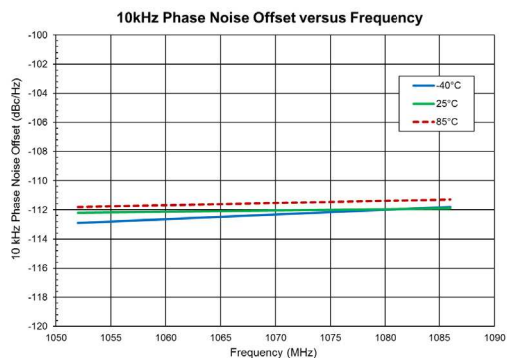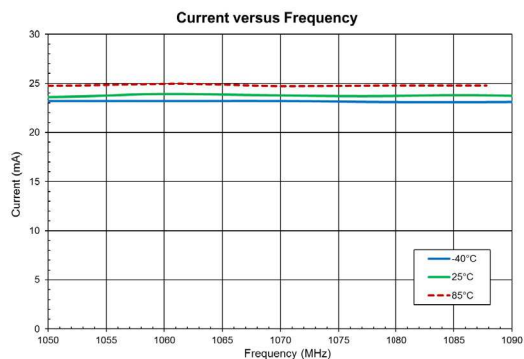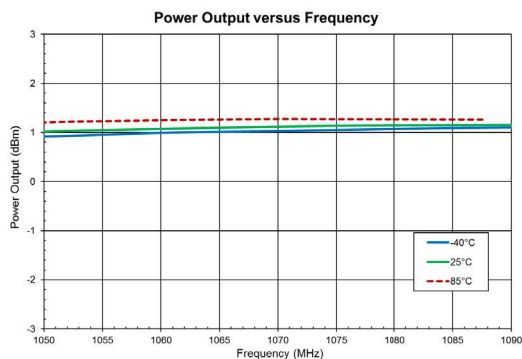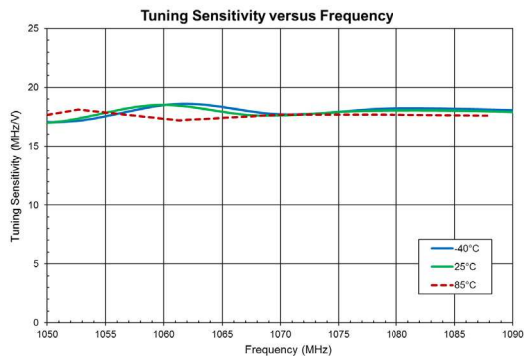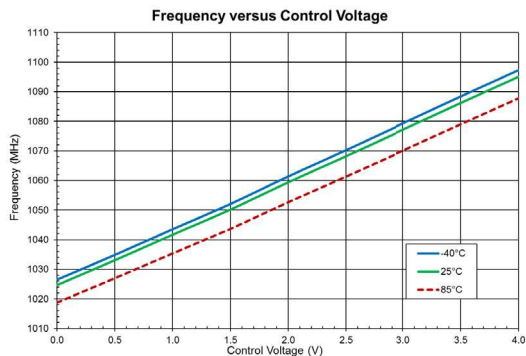


Typical Evaluation Board Performance ( $V_{CC}=7.4V$ , Temp=25 °C)  
Frequency=1052MHz

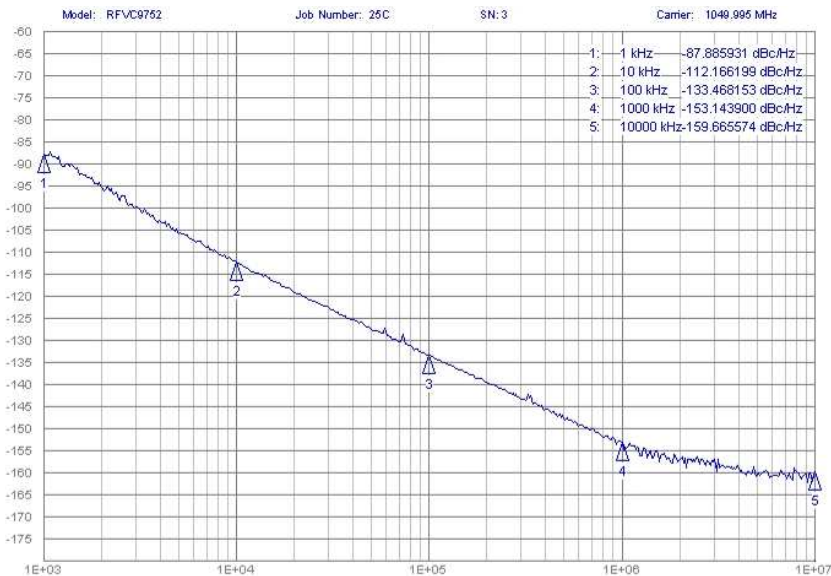

Frequency=1086MHz

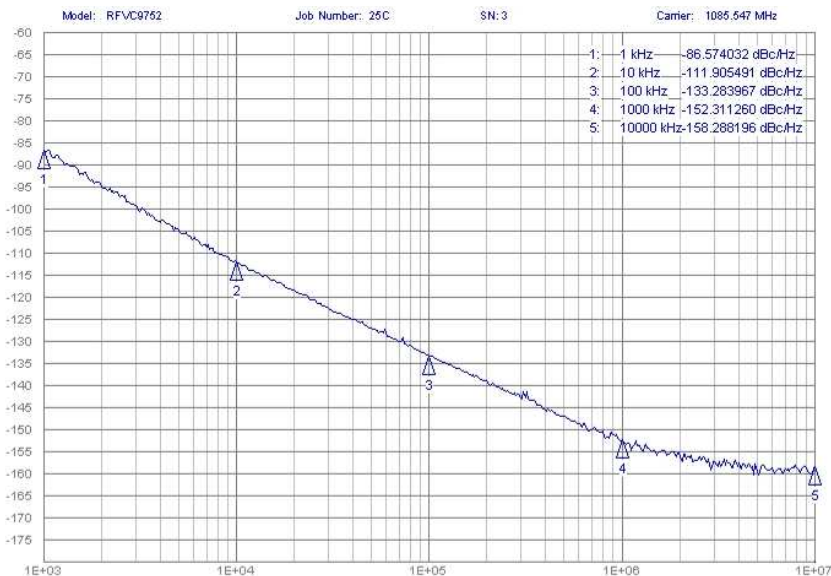

## Evaluation Board Schematic

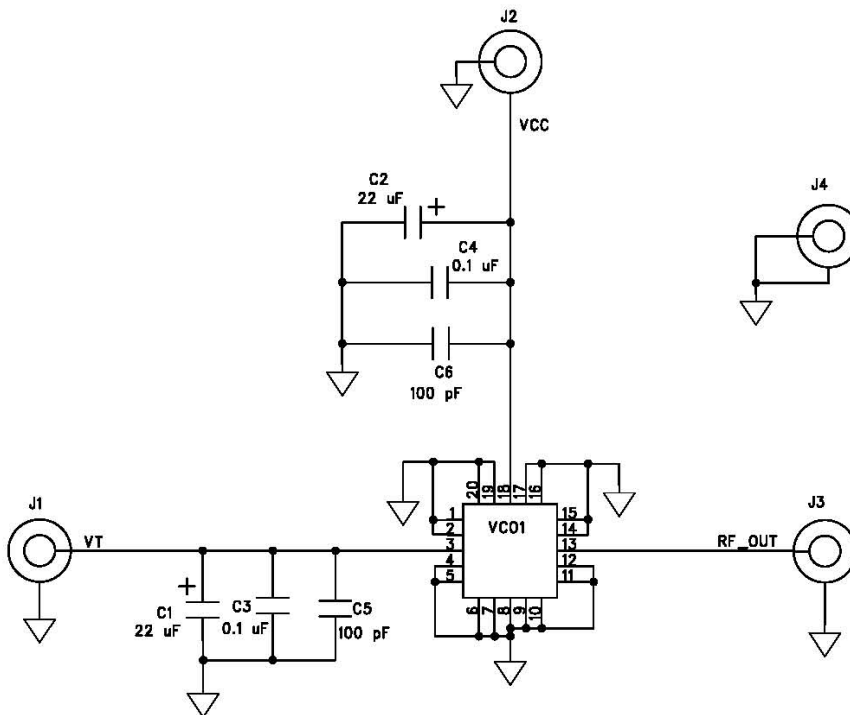


C1, C2 CASE D TANTALUM  
C3 - C6 0402

## Evaluation Board Bill of Materials (BOM)

Description	Reference Designator	Manufacturer	Manufacturer's P/N
Evaluation Board		RFMD	225242(A)
CONN, SMA, END LNCH, MINI, FLT, 0.042"	J1-J4	Emerson Network Power	142-0741-831
CAP, 0.1uF, 10%, 16V, X7R, 0402	C3-C6	Murata Electronics	GRM155R71C104KA88D
CAP, 22uF, 20%, 35V, TANT-D	C1-C2	AVX Corporation	TAJD226M035RNJ
RFVC9752	U1	RFMD	RFVC9752

Pin Out

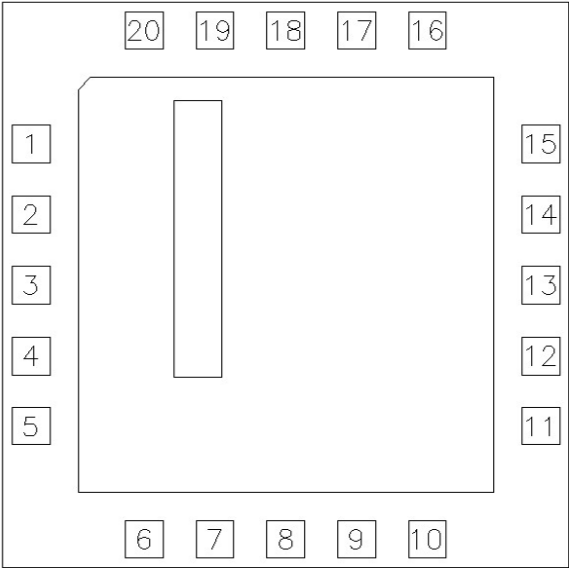


### Pin Name and Description

Pin	Function	Description
<b>1</b>	<b>GND</b>	Ground
<b>2</b>	<b>GND</b>	Ground
<b>3</b>	<b>VT</b>	Control Voltage
<b>4</b>	<b>GND</b>	Ground
<b>5</b>	<b>GND</b>	Ground
<b>6</b>	<b>GND</b>	Ground
<b>7</b>	<b>GND</b>	Ground
<b>8</b>	<b>GND</b>	Ground
<b>9</b>	<b>GND</b>	Ground
<b>10</b>	<b>GND</b>	Ground
<b>11</b>	<b>GND</b>	Ground
<b>12</b>	<b>GND</b>	Ground
<b>13</b>	<b>RFOUT</b>	VCO RF Output
<b>14</b>	<b>GND</b>	Ground
<b>15</b>	<b>GND</b>	Ground
<b>16</b>	<b>GND</b>	Ground
<b>17</b>	<b>GND</b>	Ground
<b>18</b>	<b>VCC</b>	Supply Voltage
<b>19</b>	<b>GND</b>	Ground
<b>20</b>	<b>GND</b>	Ground

## Package Drawing

Dimensions in millimeters

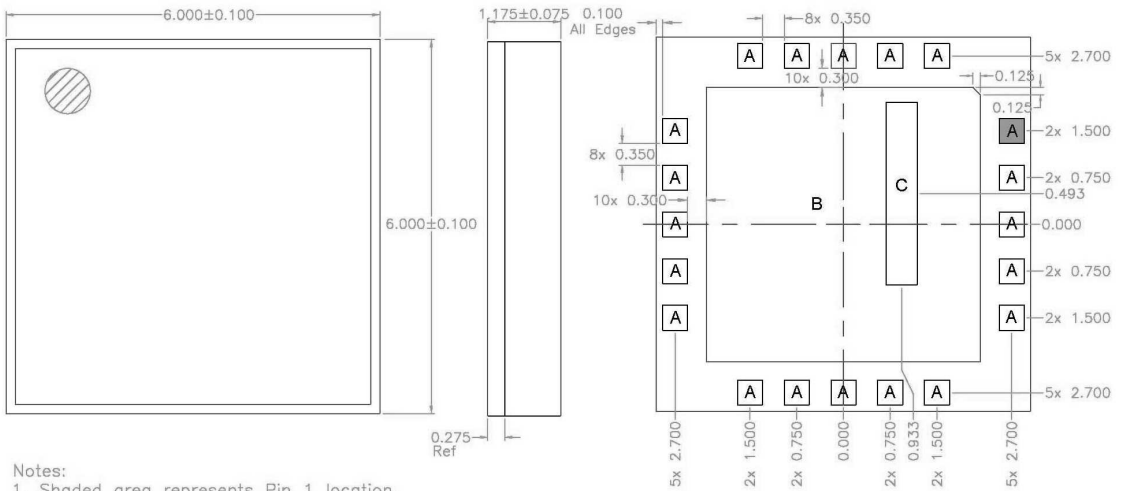


A = 0.400 x 0.400 mm  
B = 4.400 x 4.400 mm  
C = 0.500 x 2.930 mm (opening in metal)




## Evaluation Board Pattern

Dimensions in millimeters

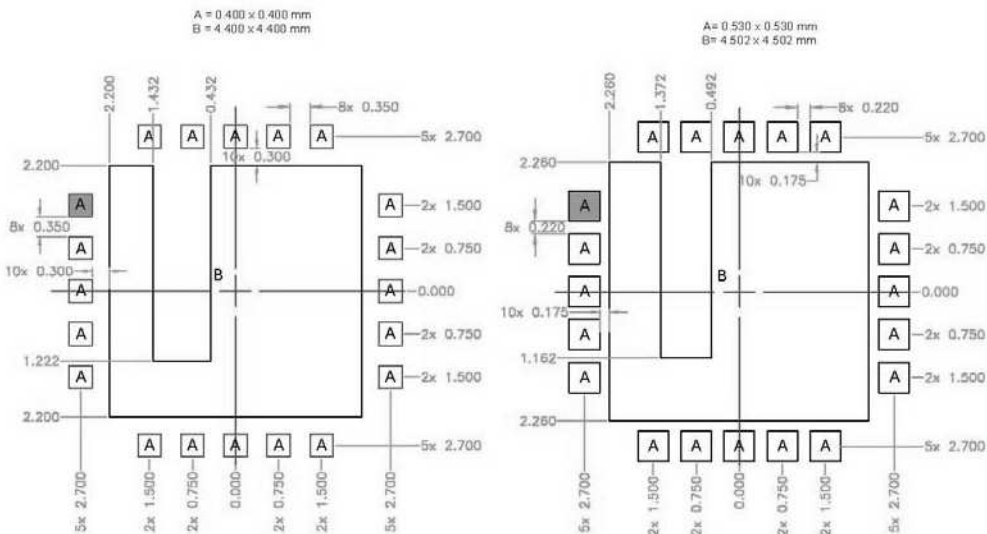

PCB Metal Land Pattern

PCB Solder Mask Pattern

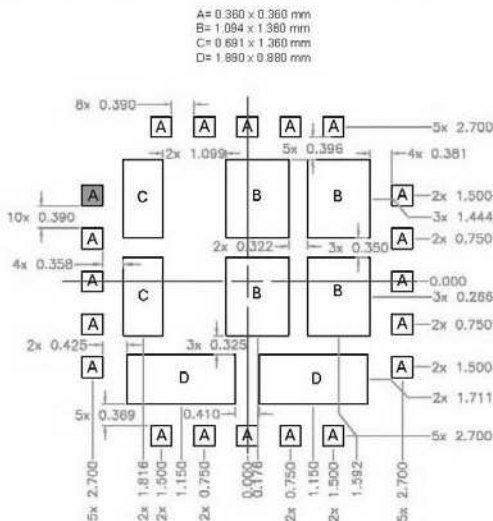


PCB Stencil Pattern

Notes:

1. Shaded area represents Pin 1 location.

Evaluation Board Assembly Drawing

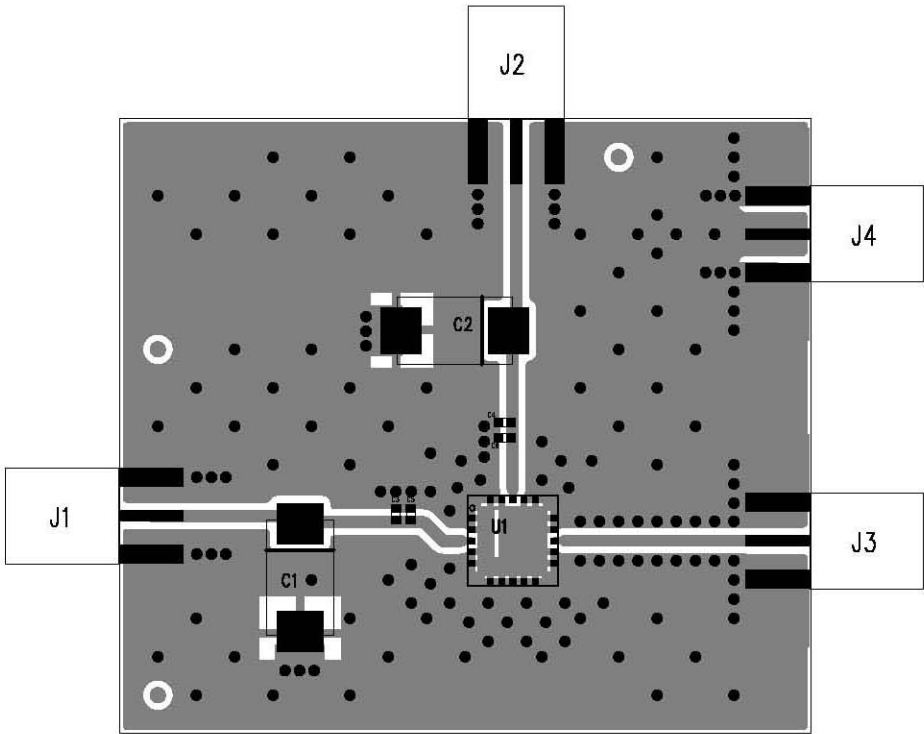

Connector	Function	Description
J1	VT	Control Voltage
J2	VCC	Supply Voltage
J3	RFOUT	RF Output
J4	GND	Ground