

PJESD5V6LC-5W SERIES

LOW CAPACITANCE 5-FOLD ESD PROTECTION DIODE ARRAYS

FEATURES

- Low diode capacitance
- Maximum peak pulse power : $P_{PP}=25W$ at $t_p=8/20\mu s$
- Low clamping voltage : $V_{CL(R)}=12V$ at $I_{PP}=2.5A$
- ESD Protection Meeting IEC61000-4-2-Level 4
- ESD Passed devices : Air mode 15KV ,human body mode 8KV
- Lead free in comply with EU RoHS 2002/95/EC directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA


Case : SOT-363, Plastic

Terminals : Solderable per MIL-STD-750, Method 2026

Approx. Weight : 0.006 gram


Marking :

PJESD5V6LC-5W=SAQ
PJESD6V2LC-5W=SAR
PJESD6V8LC-5W=SAS



SOT-363

Unit : inch(mm)

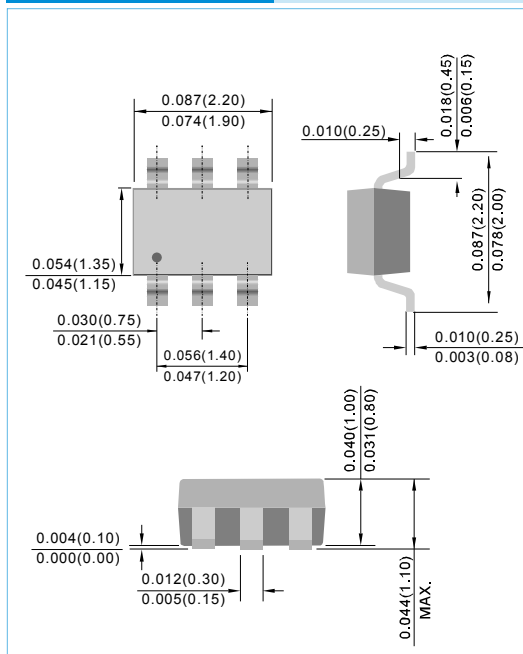

MAXIMUM RATINGS

Parameter	Conditions	Symbol	Min.	Max.	Unit
Peak Pulse Power	8/20 μs pulse;Notes 1 and 2	P_{PP}	-	25	W
Peak Pulse Current	8/20 μs pulse;Notes 1 and 2	I_{PP}	-	2.5	A
Operating Junction and Storage Temperature Range		T_J, T_{STG}	-55	+150	$^{\circ}C$

Notes

- 1.Non-repetitive current pulse 8/20 μs exponentially decaying waveform;see Fig 1
- 2.Measured from any of pins 1,3,4,5, or 6 to pin 2



PJESD5V6LC-5W SERIES

ELECTRICAL CHARACTERISTICS (T_J=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse stand-off voltage PJESD5V6LC-5W PJESD6V2LC-5W PJESD6V8LC-5W	V _{RWM}		-	-	3.3 4.3 5.0	V
Reverse leakage current PJESD5V6LC-5W PJESD6V2LC-5W PJESD6V8LC-5W	I _{RM}	V _{RWM} =3.0V V _{RWM} =4.3V V _{RWM} =5.0V	- - -	- - -	0.5 0.5 0.5	μA
Breakdown leakage current PJESD5V6LC-5W PJESD6V2LC-5W PJESD6V8LC-5W	V _{BR}	I _Z =1mA	5.32 5.89 6.37	5.60 6.20 6.70	5.88 6.51 7.04	V
Diode capacitance PJESD5V6LC-5W PJESD6V2LC-5W PJESD6V8LC-5W	C _d	f=1MHz; V _R =0V	- - -	22 19 16	28 24 19	pF
Clamping voltage PJESD5V6LC-5W PJESD6V2LC-5W PJESD6V8LC-5W	V _{CL(R)}	notes 1 and 2 I _{PP} =1.0A I _{PP} =2.5A I _{PP} =1.0A I _{PP} =2.5A I _{PP} =1.0A I _{PP} =2.5A	- - - - - -	- - - - - -	10 12 10 12 10 12	V
Differential resistance PJESD5V6LC-5W PJESD6V2LC-5W PJESD6V8LC-5W	r _{diff}	I _R =1mA	- - -	- - -	200 150 100	Ω

PJESD5V6LC-5W SERIES


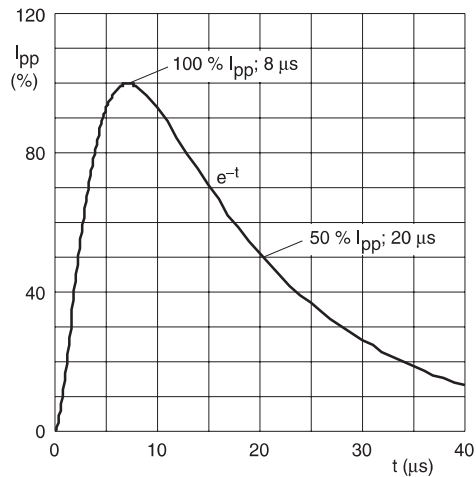


Fig.1 8/20 μ s pulse waveform according to IEC 61000-4-5.

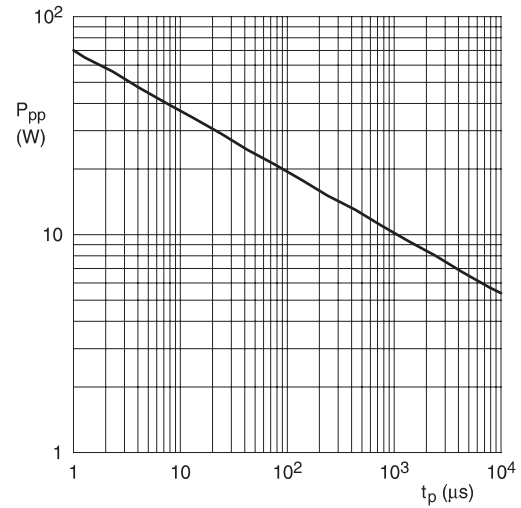

$T_{amb} = 25\text{ }^{\circ}\text{C}$.

$I_{pp} = 8/20\text{ }\mu\text{s}$ exponentially decaying waveform; see Fig.1.

Fig.2 Peak pulse power dissipation as a function of pulse time; typical values.

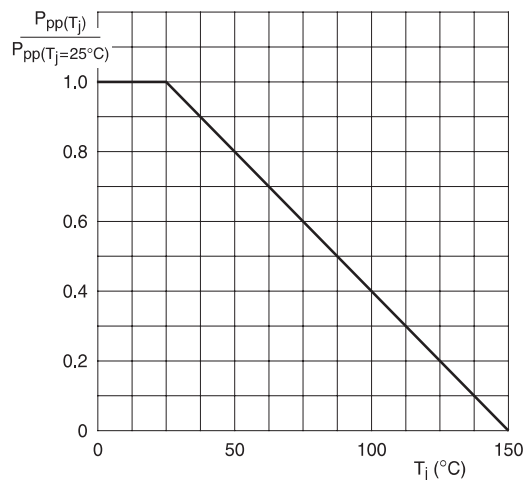


Fig.3 Relative variation of peak pulse power as a function of junction temperature; typical values.


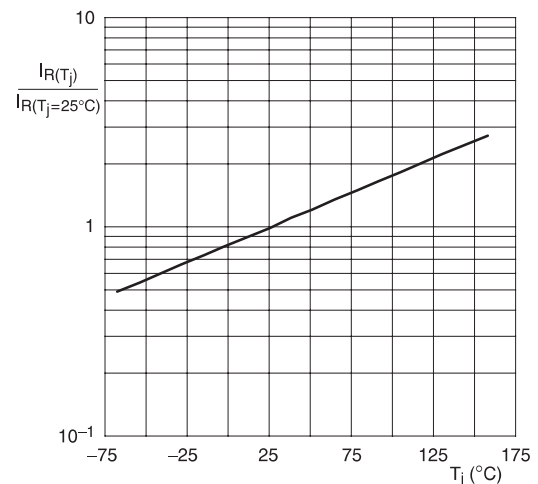


Fig.4 Relative variation of reverse leakage current as a function of junction temperature; typical values.

PJESD5V6LC-5W SERIES

MOUNTING PAD LAYOUT

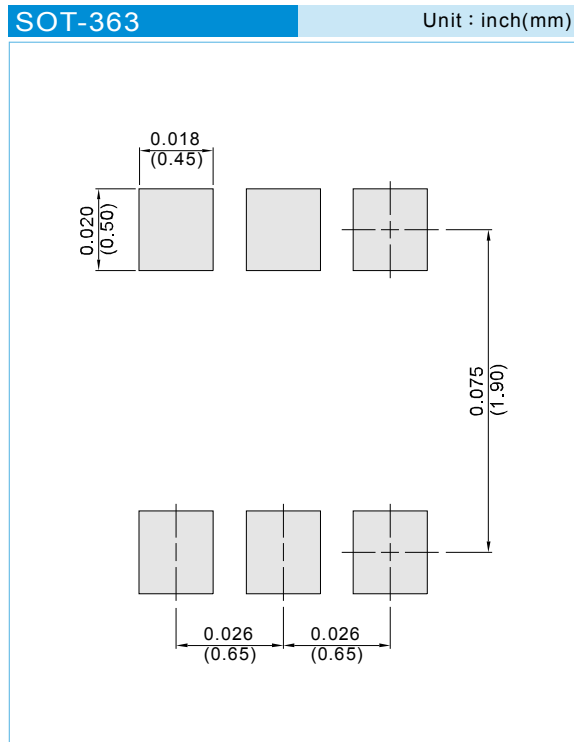

ORDER INFORMATION

- Packing information
 - T/R - 10K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

PJESD5V6LC-5W SERIES

Part No_packing code_Version

PJESD5V6LC-5W_R1_00001

PJESD5V6LC-5W_R2_00001

For example :

RB500V-40_R2_00001

Part No.

Serial number

Version code means HF

Packing size code means 13"

Packing type means T/R

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



PJESD5V6LC-5W SERIES

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.