



PJSD03LCTS~PJSD05LCTS

SINGLE LINE LOW CAPACITANCE TVS DIODE FOR ESD PROTECTION PORTABLE ELECTRONICS

VOLTAGE 3~5 Volts **POWER** 120 Watts

SOD-523

Unit : inch(mm)


- 120 Watts peak pulses power($t_p=8/20\mu s$)
- Small package for use in portable electronics
- Suitable replacement for MLV'S in ESD protection applications
- Low clamping voltage and leakage current

APPLICATIONS

- Case: SOD-523 plastic
- Terminals : Solderable per MIL-STD-750,Method 2026
- Approx Weight: 0.0014 grams
- Marking : PJSD03LCTS : PL
PJSD05LCTS : PM



Fig.139

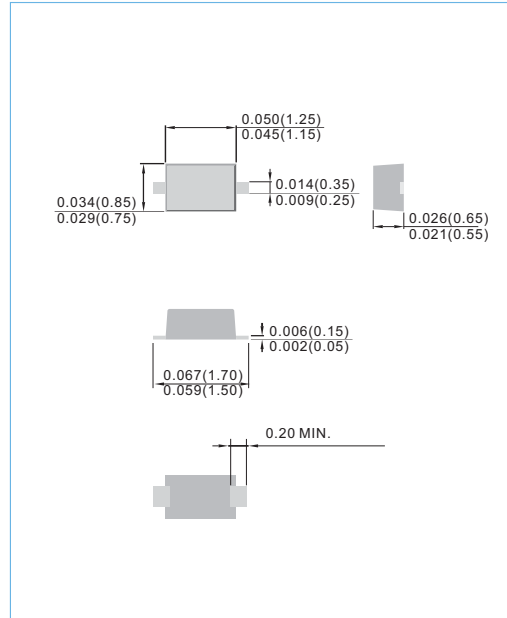

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

ABSOLUTE MAXIMUM RATING

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20 \mu s$)	P_{PK}	120	W
ESD Voltage	V_{ESD}	25	KV
Operating Temperature	T_J	-55 to 150	$^{\circ}C$
Storage Temperature	T_{STG}	-55 to 150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS

PJSD03LCTS						
Parameter	Symbol	Conditions	Min.	Typical	Max.	Units
Reverse Stand-Off Voltage	V_{RWM}	-	-	-	3.3	V
Reverse Breakdown Voltage	V_{BR}	$I_{BR}=1mA$	4	4.9	-	V
Reverse Leakage Current	I_R	$V_R=3.3V$	-	-	100	μA
Clamping Voltage(8/20 μs)	V_C	$I_{PP}=5A$	-	9.5	11	V
Off State Junction Capacitance	C_J	0Vdc Bias=f=1MHz	-	0.5	3	pF