

BAS40WS

SURFACE MOUNT SCHOTTKY DIODES

VOLTAGE 40 Volts **CURRENT** 0.2 Amperes

FEATURES



- Fast switching speed
- Surface mount package ideally suited for automatic insertion
Electrical identical standard JEDEC
- High conductor
- Lead free in comply with EU RoHS 2002/95/EC directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SOD-323, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.00014 ounces, 0.0041 grams
- Marking: S40
- Polarity: Color band denotes cathode end

SOD-323

Unit : inch(mm)

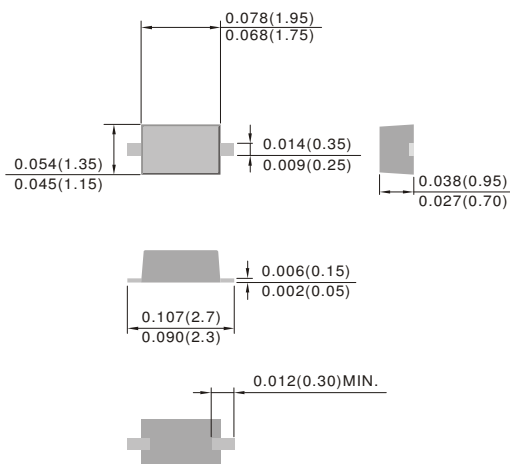

ABSOLUTE RATINGS (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMITS	UNITS
Reverse Voltage	V _R	40	V
Peak Reverse Voltage	V _{RRM}	40	V
Average Rectified Current at Temp=25°C	I _F	0.2	A
Non-repetitive Peak Forward Surge Current at t=1ms	I _{FSM}	4	A

THERMAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

PARAMETER	Symbol	BAS40WS	Units
Power Dissipation	P _{TOT}	225	mW
Thermal Resistance , Junction to Ambient	R _{θJA}	556	°C/W
Operating Junction Temperature and Storage Temperature	T _J , T _{STG}	-55 to 150	°C

BAS40WS

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Breakdown Voltage	V_{BR}	$I_R=10\mu\text{A}$	40	--	--	V
Reverse Current	I_R	$V_R=25\text{ V}$ $V_R=40\text{ V}$	--	--	1.0 10	μA
Forward Voltage	V_F	$I_F=1.0\text{mA}$ $I_F=10\text{mA}$ $I_F=40\text{mA}$	--	--	0.38 0.50 1.00	V
Total Capacitance	C_T	$V_R=0\text{V}$, $f=1.0\text{MHz}$	--	--	5.0	pF

RATING AND CHARACTERISTIC CURVES

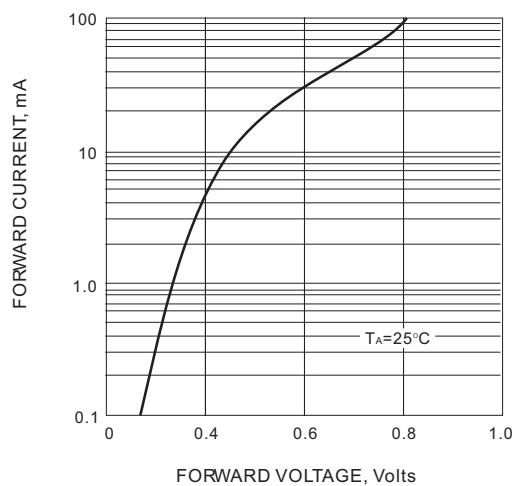


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

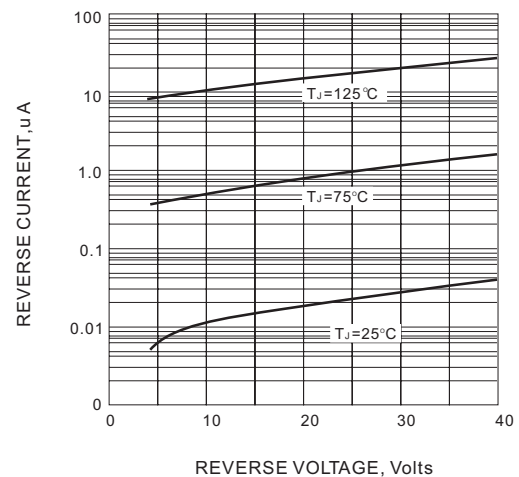


FIG. 2-TYPICAL REVERSE CHARACTERISTICS

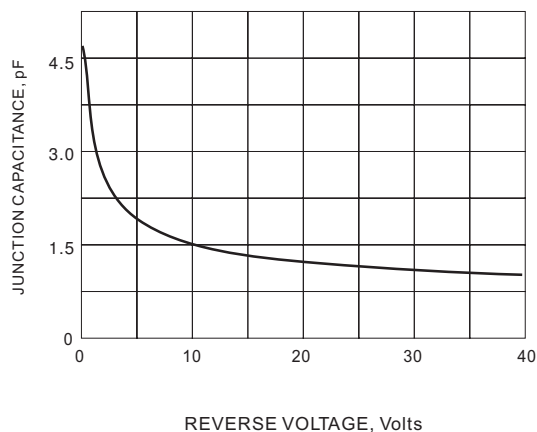


FIG. 3 TYPICAL JUNCTION CAPACITANCE


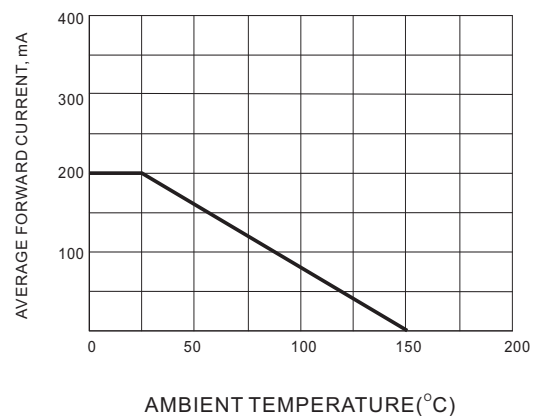


FIG. 4 FORWARD CURRENT DERATING

BAS40WS

MOUNTING PAD LAYOUT

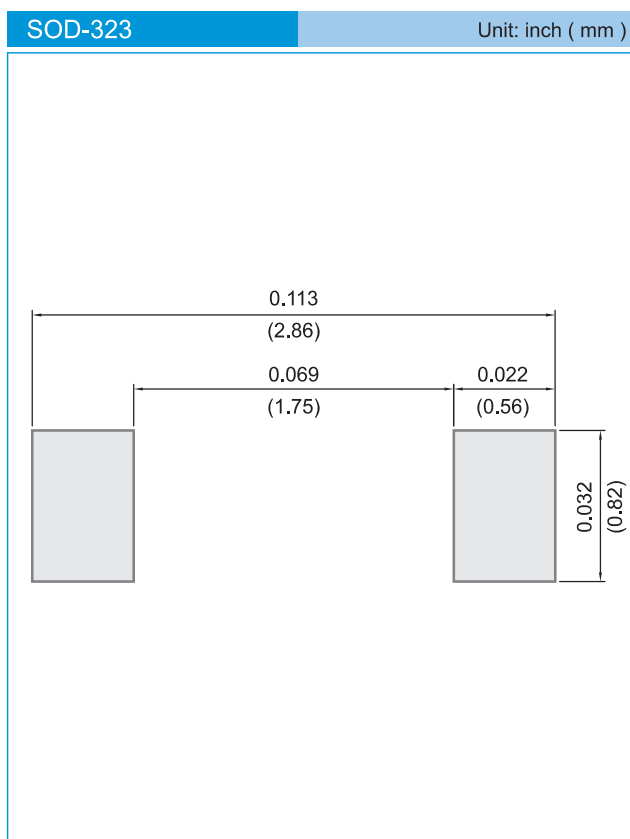

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 5K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2012

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.