

MMBT5401

HIGH VOLTAGE TRANSISTOR PNP Silicon

FEATURES


- Lead free in comply with EU RoHS 2002/95/EC directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case : SOT-23 plastic case.
- Terminals : Solderable per MIL-STD-750,Method 2026
- Standard packaging : 8mm tape
- Weight : approximately 0.0084grams
- Marking : M5A

SOT-23

Unit : inch(mm)

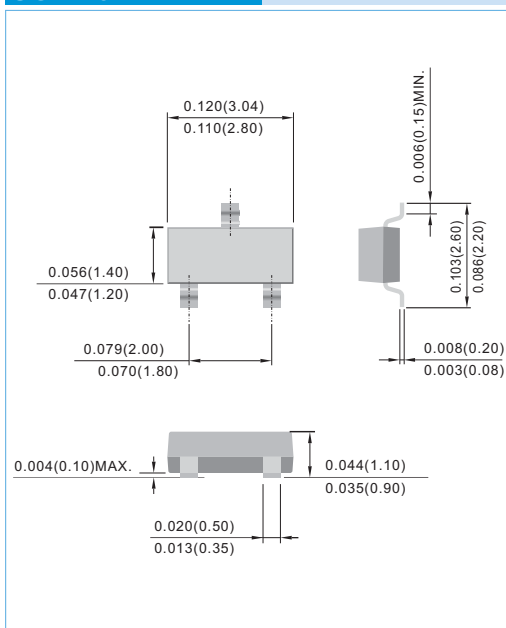

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNITS
Collector-Emitter Voltage	V_{CEO}	-150	Vdc
Collector-Base Voltage	V_{CBO}	-160	Vdc
Emitter-Base Voltage	V_{EBO}	-5.0	Vdc
Collector Current-Continuous	I_C	-500	mAdc

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operational is not implied, damage may occur and reliability may be affected.




Fig.35



MMBT5401

THERMAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	MAX	UNITS
Total Device Dissipation FR-4 Board (Note 1) T _A =25°C Derate Above 25°C	P _D	225 1.8	mW mW/°C
Thermal Resistance, Junction-to-Ambient	R _{θJA}	556	°C/W
Total Device Dissipation Alumina Substrate (Note 2) T _A =25°C Derate Above 25°C	P _D	300 2.4	mW mW/°C
Thermal Resistance Junction-to-Ambient	R _{θJA}	417	°C/W
Junction and Storage Temperature	T _J , T _{STG}	-55 to +150	°C

1.FR-4 = 70 X 60 X 1mm

2.Alumina = 0.4 X 0.3 X 0.024 in 99.5% alumina

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

CHARACTERISTIC	SYMBOL	MIN	MAX	UNITS
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage (I _C =-1.0mA, I _B =0)	V _{(BR)CEO}	-150	-	Vdc
Collector-Base Breakdown Voltage (I _C =-100μA, I _E =0)	V _{(BR)CBO}	-160	-	Vdc
Emitter-Base Breakdown Voltage (I _E =-10μA, I _C =0)	V _{(BR)EBO}	-5.0	-	Vdc
Collector Cutoff Current (V _{CB} =-120Vdc, I _E =0) (V _{CB} =-120Vdc, I _E =0, T _A =100°C)	I _{CES}	-	-50 -50	nA μA
ON CHARACTERISTICS				
DC Current Gain (I _C =-1.0mA, V _{CE} =-5.0Vdc) (I _C =-10mA, V _{CE} =-5.0Vdc) (I _C =-50mA, V _{CE} =-5.0Vdc)	h _{FE}	50 60 50	- 240 -	-
Collector-Emitter Saturation Voltage (I _C =-10mA, I _B =-1.0mA) (I _C =-50mA, I _B =-5.0mA)	V _{CE(SAT)}	- -	-0.2 -0.5	Vdc
Base-Emitter Saturation Voltage (I _C =-10mA, I _B =-1.0mA) (I _C =-50mA, I _B =-5.0mA)	V _{BE(SAT)}	- -	-1.0 -1.0	Vdc
SMALL-SIGNAL CHARACTERISTICS				
Current-Gain-Bandwidth Product (I _C =-10mA, V _{CE} =-10Vdc, f=100MHz)	f _r	100	300	MHz
Output Capacitance (V _{CB} =-10Vdc, I _E =0, f=1.0MHz)	C _{OB0}	-	6.0	pF
Small Signal Current Gain (I _C =-1.0mA, V _{CE} =-10Vdc, f=1.0kHz)	h _{FE}	40	200	-
Noise Figure (I _C =-200μA, V _{CE} =-5.0Vdc, R _s =10Ω, f=1.0kHz)	NF	-	8.0	dB

MMBT5401

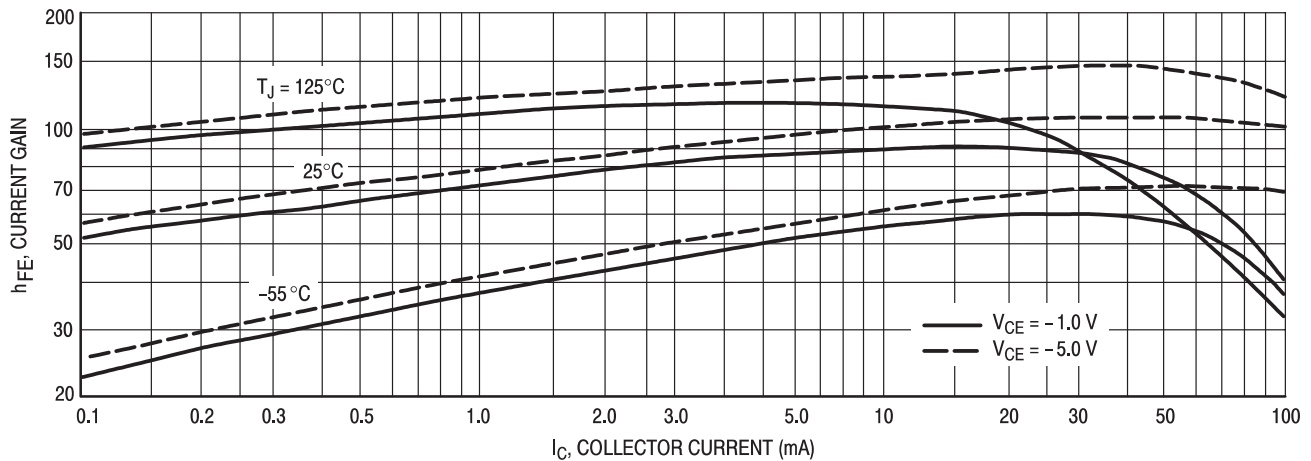


Figure 1. DC Current Gain

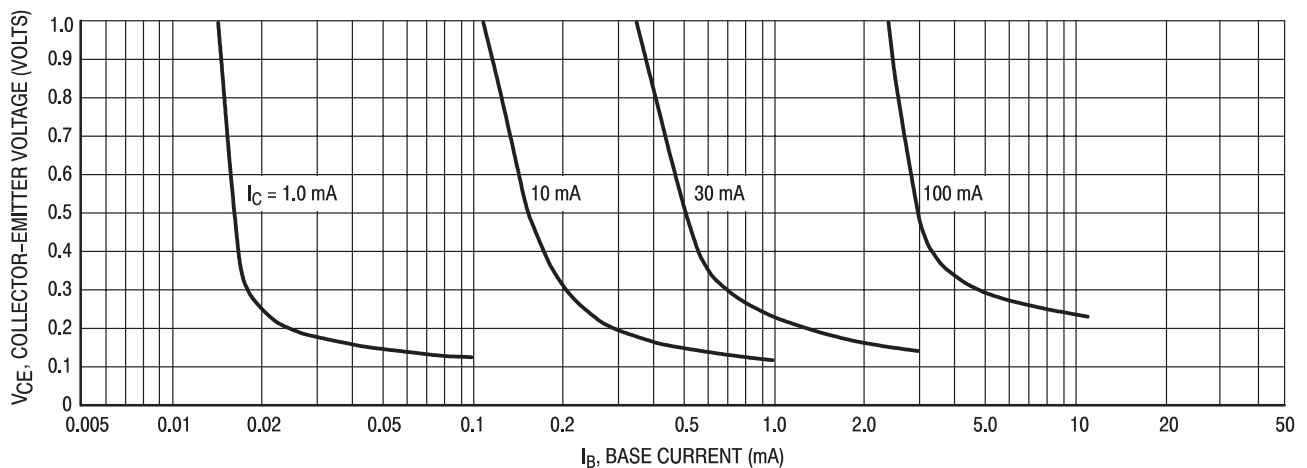


Figure 2. Collector Saturation Region

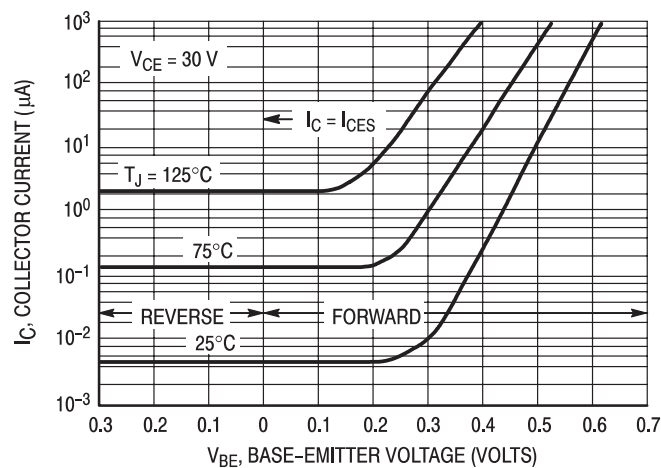


Figure 3. Collector Cut-Off Region

MMBT5401

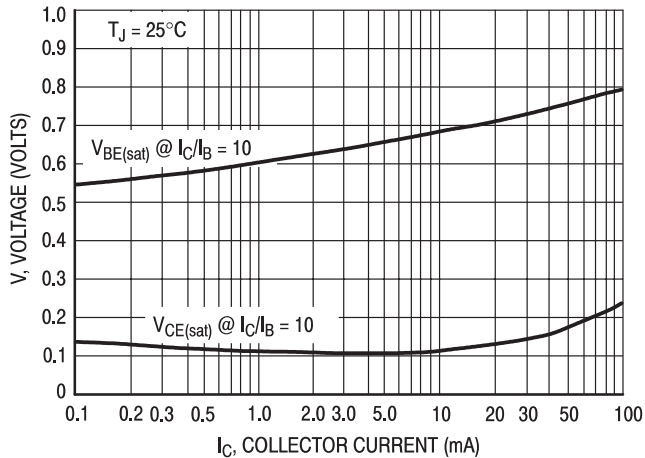


Figure 4. "On" Voltages

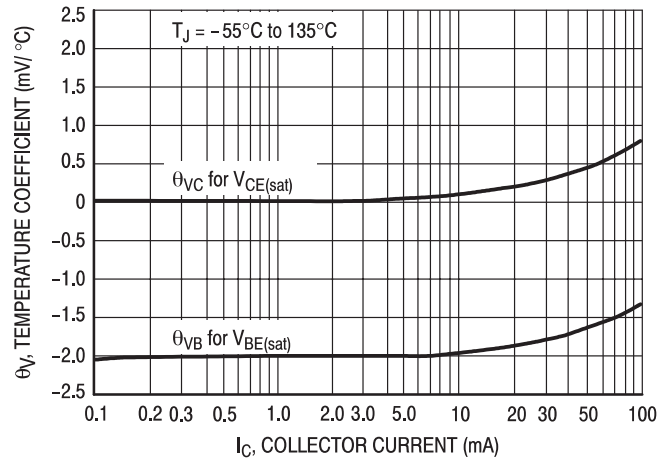


Figure 5. Temperature Coefficients

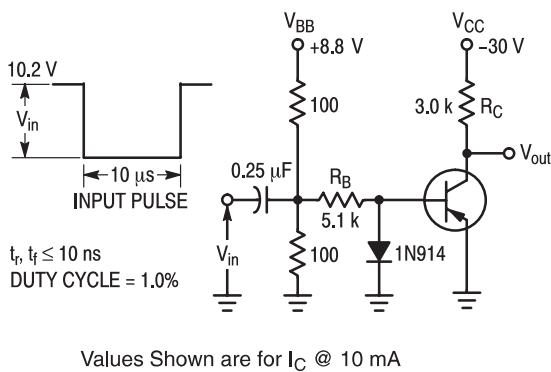


Figure 6. Switching Time Test Circuit

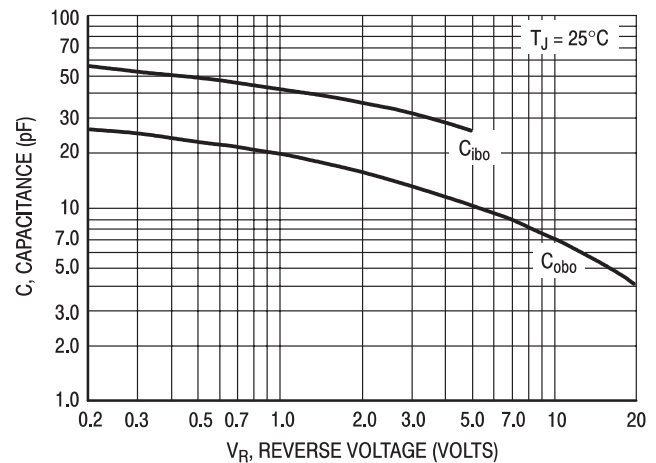


Figure 7. Capacitances

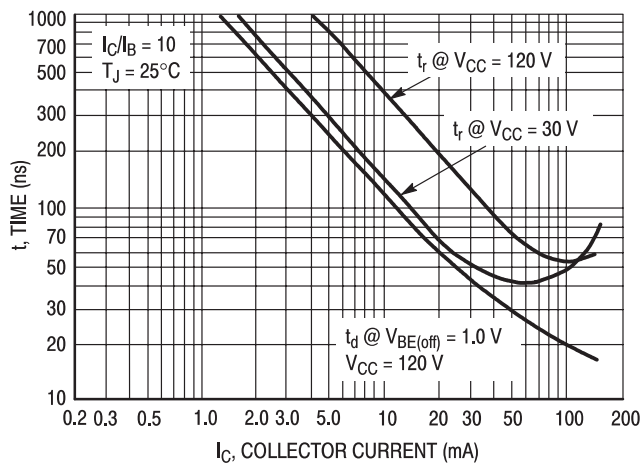


Figure 8. Turn-On Time


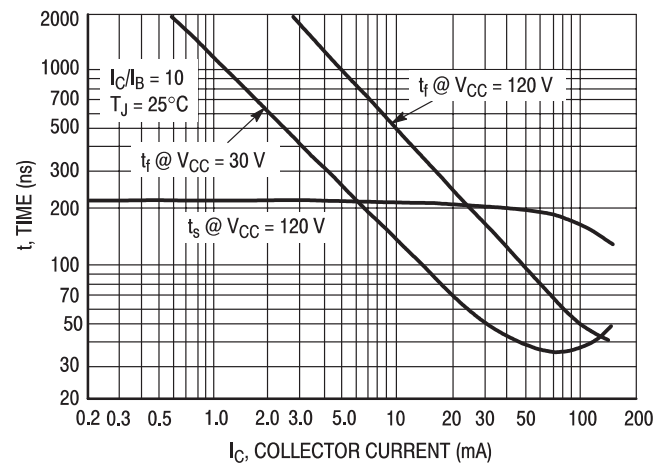


Figure 9. Turn-Off Time

MMBT5401

MOUNTING PAD LAYOUT

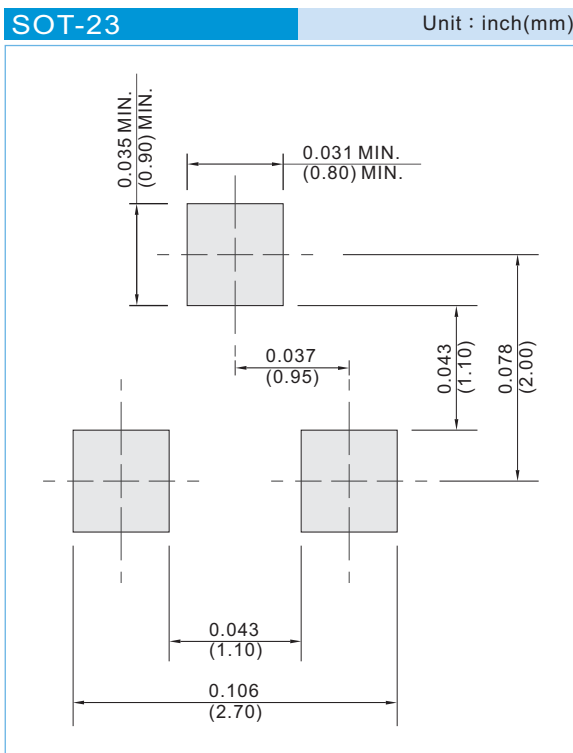

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2012

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.