



SB240LES

LOW VF SCHOTTKY RECTIFIER

VOLTAGE 40 Volts **CURRENT** 2.0 Amperes


DO-41 Unit : inch(mm)

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- For use in low voltage,high frequency inverters ,free wheeling , and polarity protection applications.
- IEC61000-4-2 ESD 15KV air, 8KV Contact Compliance
- Lead free in comply with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: DO-41 Molded plastic
- Terminals: Axial leads, solderable per MIL-STD-750,Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.011 ounces, 0.336 grams

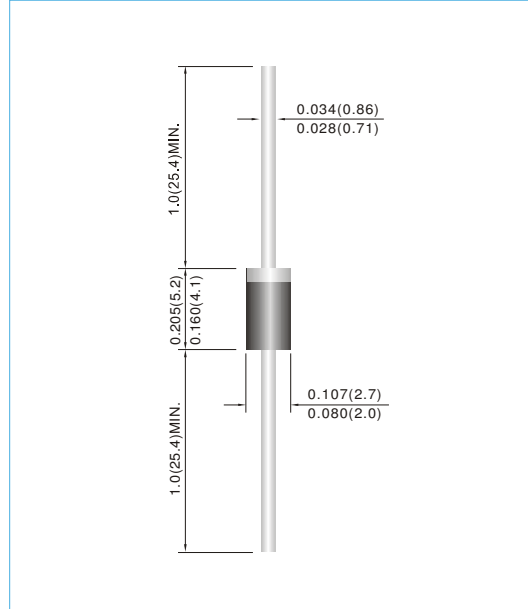

MAXIMUM RATINGS(T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	40	V
Maximum average forward rectified current	I _{F(AV)}	2	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	150	A
Typical thermal resistance	R _{θJA} R _{θJL}	70 26	°C/W
Operating junction temperature range	T _J	-55 to + 150	°C
Storage temperature range	T _{STG}	-55 to + 150	°C

ELECTRICAL CHARACTERISTICS(T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT	
Breakdown voltage	V _{BR}	I _R =0.5mA	40	-	-	V	
Instantaneous forward voltage	V _F	I _F =1A I _F =2A	T _J =25°C	-	0.37	-	V
				-	0.41	0.45	V
		I _F =1A I _F =2A	T _J =125°C	-	0.25	-	V
				-	0.30	-	V
Reverse current	I _R	V _R =32V	-	30	-	μA	
		V _R =40V	T _A =25°C	-	-	200	μA
			T _A =125°C	-	33	-	mA



SB240LES

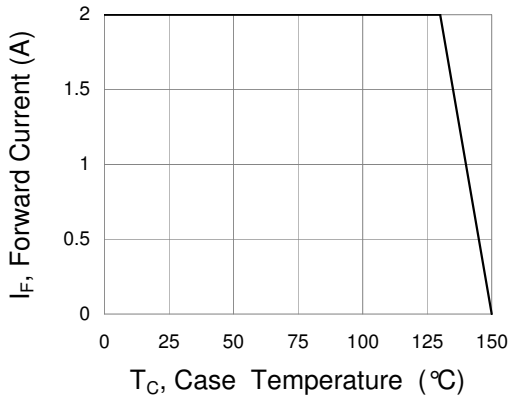


Fig.1 Forward Current Derating Curve

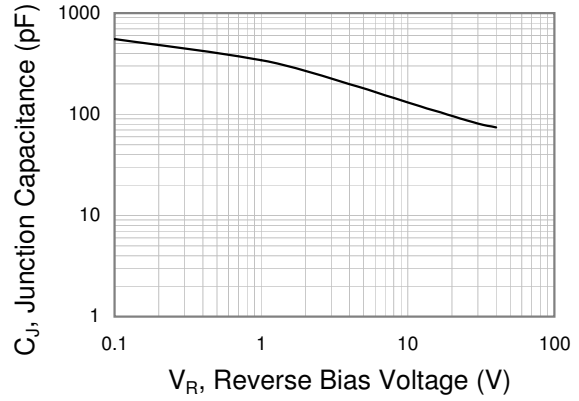


Fig.2 Typical Junction Capacitance

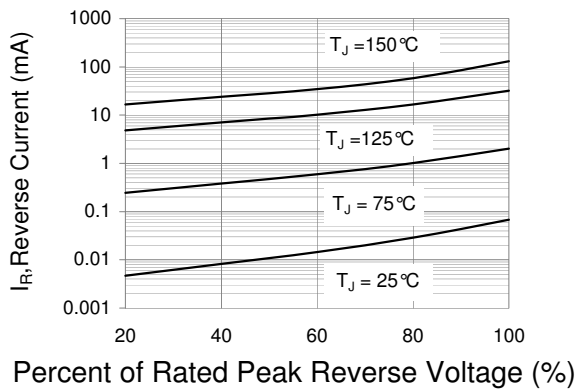


Fig.3 Typical Reverse Characteristics

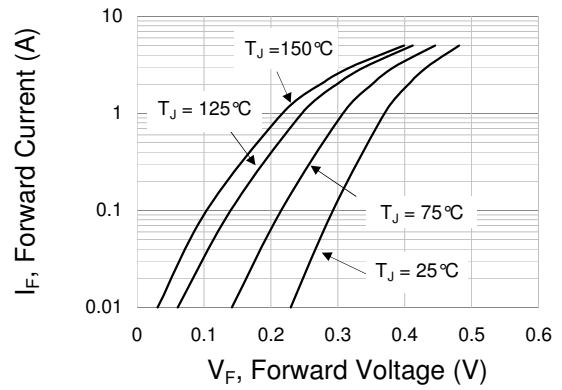


Fig.4 Typical Forward Characteristics



SB240LES

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
T/B	A	N/A	0	HF	0	serial number
T/R	R	7"	1	RoHS	1	serial number
B/P	B	13"	2			
T/P	T	26mm	X			
TRR	S	52mm	Y			
TRL	L	PBCU	U			
FORMING	F	PBCD	D			

Part No_packing code_Version

SB240LES_AY_10001

SB240LES_B0_00001

SB240LES_B0_10001