

UF1AF SERIES

SURFACE MOUNT ULTRA FAST RECTIFIER


VOLTAGE 50-600 Volts **CURRENT** 1 Ampere

FEATURES


- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Ultrafast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Glass passivated junction
- Lead free in comply with EU RoHS 2002/95/EC directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SMBF molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0018 ounces, 0.05 grams
- Polarity : Color band denotes cathode end



SMBF Unit : inch(mm)

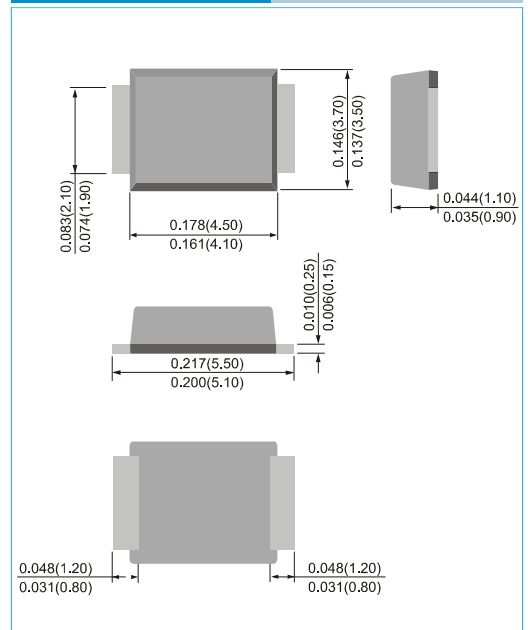

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	UF1AF	UF1BF	UF1DF	UF1GF	UF1JF	UNITS
Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	V
RMS Voltage	V _{RMS}	35	70	140	280	420	V
DC Blocking Voltage	V _R	50	100	200	400	600	V
Average Forward Current	I _{F(AV)}	1					A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	30					A
Forward Voltage at 1.0A	V _F	1			1.4	1.7	V
DC Reverse Current at Rated DC Blocking Voltage T _J =25°C	I _R	1					μA
Typical Junction capacitance V _R =4V,f=1MHz	C _J	18			10	8	pF
Typical Thermal Resistance ,Junction to Lead (Note 1) Junction to Ambient (Note 1)	R _{θJL} R _{θJA}	20 62.5					°C / W
Reverse Recovery Time (I _F =0.5A, I _R =1.0A,I _{rr} =0.25A)	T _{rr}	50				100	ns
Operating Junction Temperature and Storage Temperature Range	T _J ,T _{STG}	-55 to +150					°C

NOTES :

1. Mounted on 48cm² FR-4 PCB.

UF1AF SERIES

RATING AND CHARACTERISTIC CURVES

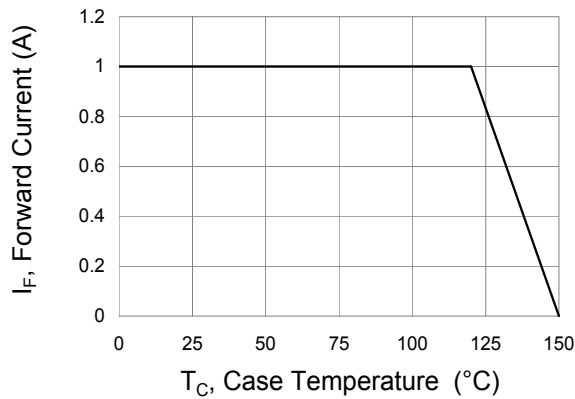


Fig.1 Forward Current Derating Curve

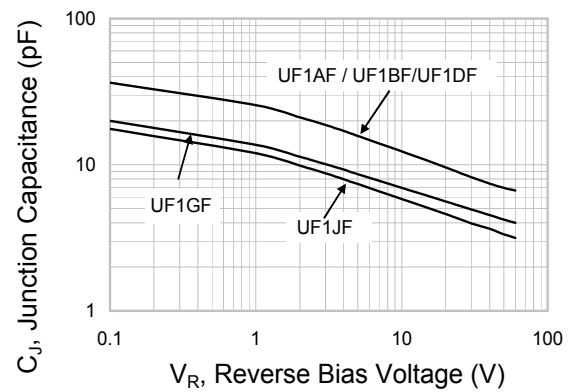


Fig.2 Typical Junction Capacitance

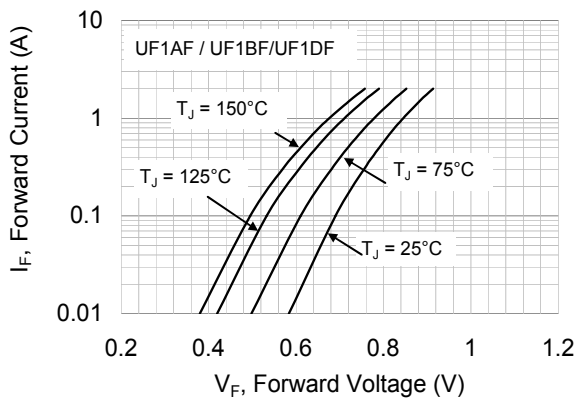


Fig.3 Typical Forward Characteristics

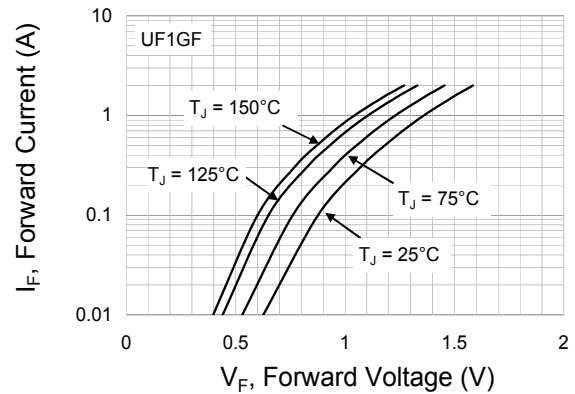


Fig.4 Typical Forward Characteristics

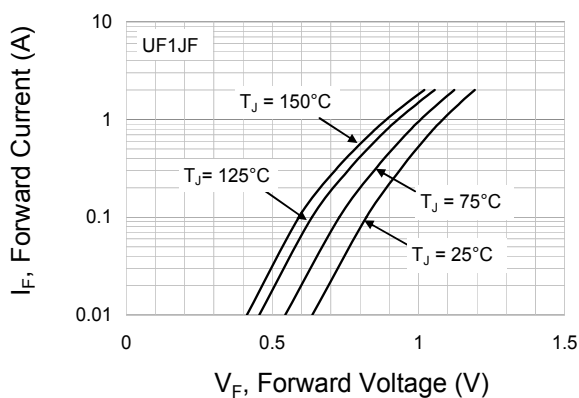


Fig.5 Typical Forward Characteristics

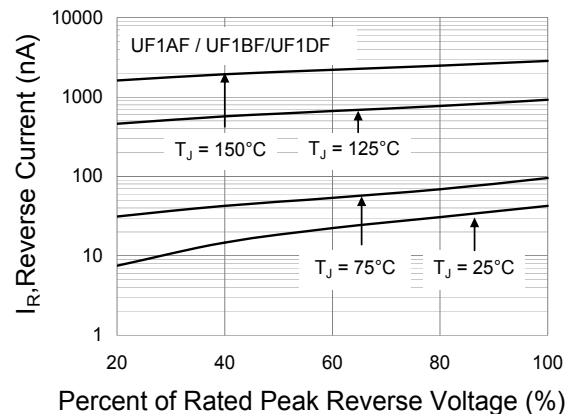


Fig.6 Typical Reverse Characteristics



UF1AF SERIES

RATING AND CHARACTERISTIC CURVES

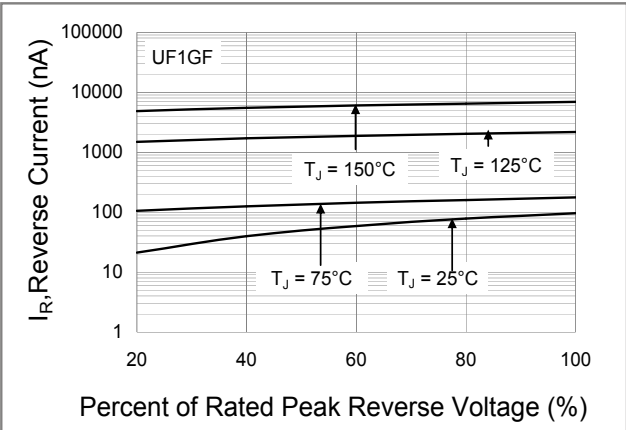


Fig.7 Typical Reverse Characteristics


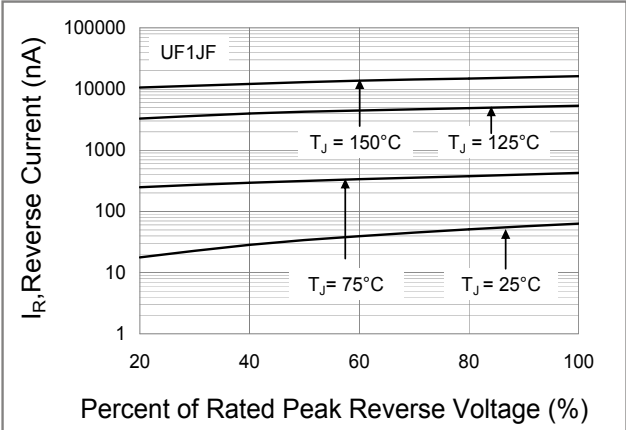


Fig.8 Typical Reverse Characteristics

UF1AF SERIES

MOUNTING PAD LAYOUT

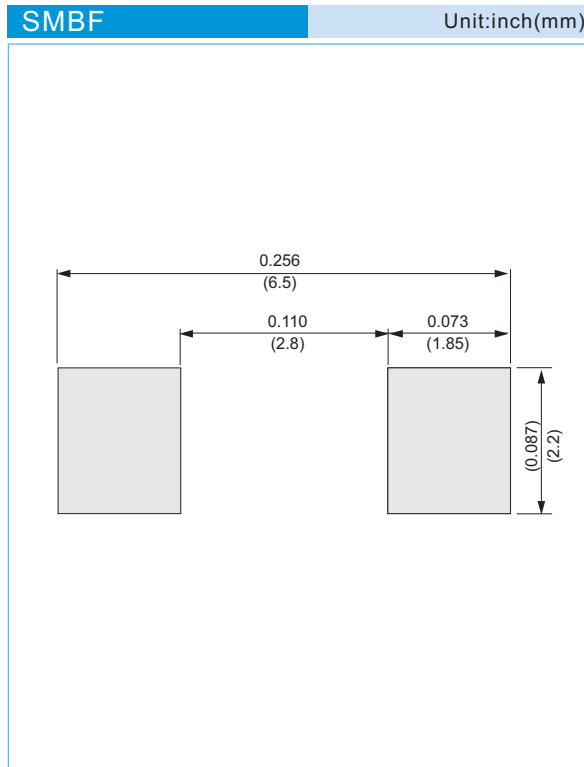

ORDER INFORMATION

- Packing information
T/R - 5K per 13" plastic Reel

UF1AF SERIES

Part No_packing code_Version

UF1AF_R2_00001

For example :

RB500V-40_R2_00001

Part No.

Serial number

Version code means HF

Packing size code means 13"

Packing type means T/R

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			