

# 1E1 SERIES

## SUPERFAST RECOVERY RECTIFIERS

**VOLTAGE** 50 to 800 Volts **CURRENT** 1.0 Ampere

### FEATURES


- Plastic package has Underwriters Laboratories Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Superfast recovery times-epitaxial construction.
- Low forward voltage, high current capability.
- Exceeds environmental standards of MIL-S-19500/228.
- Hermetically sealed.
- Low leakage.
- High surge capability.
- Lead free in comply with EU RoHS 2002/95/EC directives.

### MECHANICAL DATA

- Case: Molded plastic, R-1.
- Terminals: Axial leads, solderable to MIL-STD-750, Method 2026.
- Polarity: Color Band denotes cathode end.
- Mounting Position: Any.
- Weight: 0.0068 ounce, 0.1937 gram.

**R-1**

Unit : inch(mm)

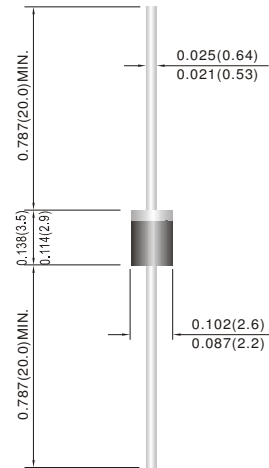

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
Resistive or inductive load, 60Hz.

PARAMETER	SYMBOL	1E1	1E2	1E2A	1E3	1E3A	1E4	1E5	1E6	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	150	200	300	400	600	800	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	105	140	210	280	420	560	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	150	200	300	400	600	800	V
Maximum Average Forward Current .375"(9.5mm) lead length at T <sub>A</sub> =55°C	I <sub>F(AV)</sub>	1.0								A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	30								A
Maximum Forward Voltage at 1.0A	V <sub>F</sub>	0.95				1.25		1.7	2.5	V
Maximum DC Reverse Current at Rated DC Blocking Voltage T <sub>J</sub> =25°C T <sub>J</sub> =100°C	I <sub>R</sub>	1.0 150								μA
Typical Junction Capacitance (Note 2)	C <sub>J</sub>	17								pF
Maximum Reverse Recovery Time (Note 1)	t <sub>rr</sub>	35								ns
Typical Thermal Resistance	R <sub>θJA</sub>	60								°C / W
Operating Junction and Storage Temperature Range	T <sub>J</sub> ,T <sub>STG</sub>	-55 to +150								°C

### NOTES:

1. Reverse Recovery Test Conditions:  $I_F=.5A$ ,  $I_R=1A$ ,  $I_{rr}=.25A$
2. Measured at 1 MHz and applied reverse voltage of 4.0 VDC

# 1E1 SERIES

## RATING AND CHARACTERISTIC CURVES

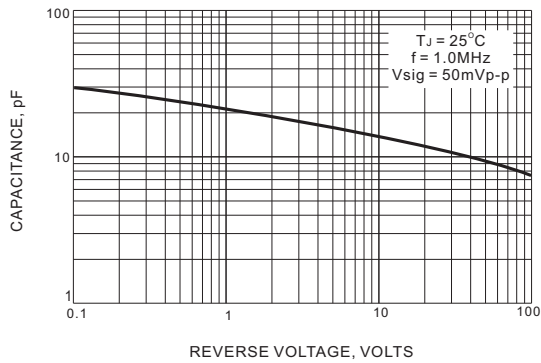


FIG.1 TYPICAL JUNCTION CAPACITANCE

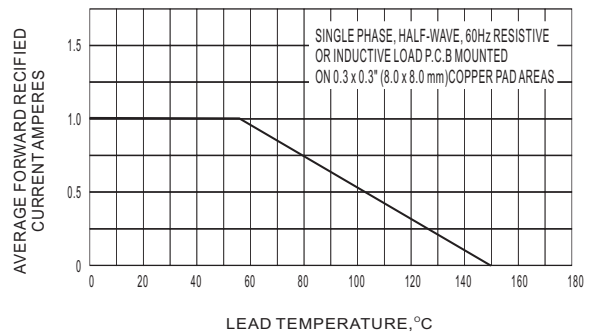


FIG.2 MAXIMUM AVERAGE FORWARD CURRENT DERATING

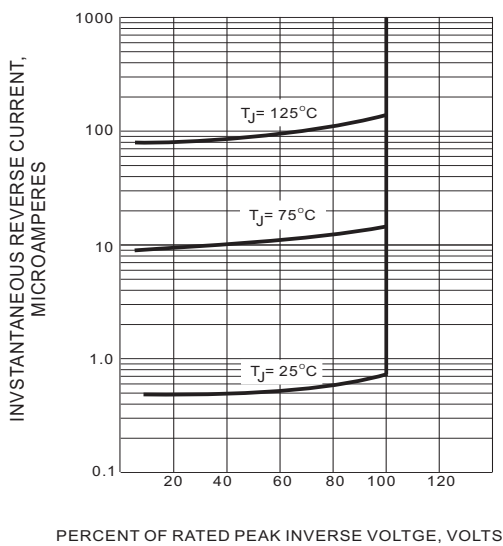


FIG.3 TYPICAL REVERSE CHARACTERISTICS

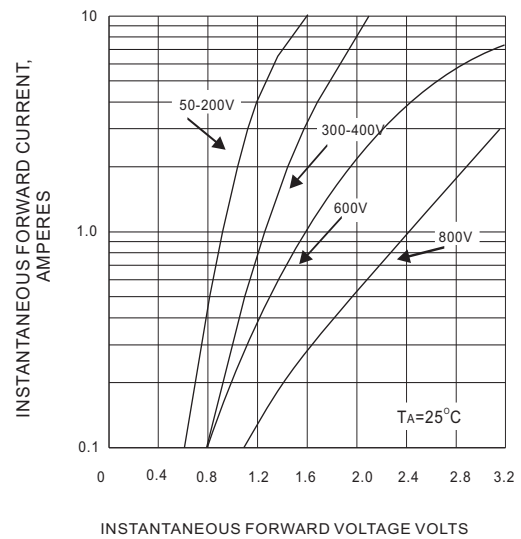


FIG.4 TYPICAL FORWARD CHARACTERISTICS

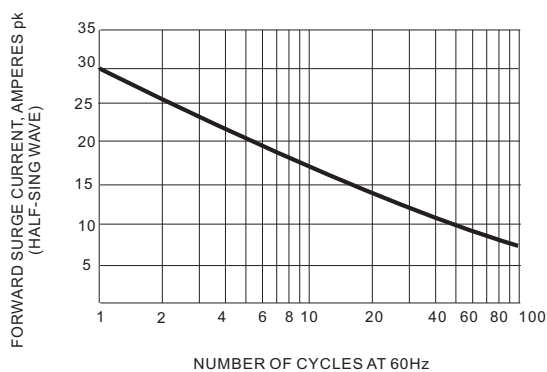


FIG.5 MAXIMUM NON-REPEITIVE SURGE CURRENT

# 1E1 SERIES

## Part No\_packing code\_Version

1E1\_AX\_00001  
1E1\_AX\_10001  
1E1\_AY\_00001  
1E1\_AY\_10001  
1E1\_B0\_00001  
1E1\_B0\_10001  
1E1\_R2\_00001  
1E1\_R2\_10001

For example :

**RB500V-40\_R2\_00001**

Part No.

Serial number

Version code means HF

Packing size code means 13"

Packing type means T/R

Packing Code <b>XX</b>				Version Code <b>XXXXX</b>		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	<b>A</b>	N/A	<b>0</b>	HF	<b>0</b>	serial number
Tape and Reel (T/R)	<b>R</b>	7"	<b>1</b>	RoHS	<b>1</b>	serial number
Bulk Packing (B/P)	<b>B</b>	13"	<b>2</b>			
Tube Packing (T/P)	<b>T</b>	26mm	<b>X</b>			
Tape and Reel (Right Oriented) (TRR)	<b>S</b>	52mm	<b>Y</b>			
Tape and Reel (Left Oriented) (TRL)	<b>L</b>	PANASERT T/B CATHODE UP (PBCU)	<b>U</b>			
FORMING	<b>F</b>	PANASERT T/B CATHODE DOWN (PBCD)	<b>D</b>			



## 1E1 SERIES

---

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.