

LAN89303



High-Performance, Three Port, 10/100 Managed Ethernet Switch with MII/RMII™ for Automotive Applications

Features

- Designed, fabricated, tested, characterized and qualified for automotive applications
- TrueAuto™ design, service and support
- Three port switch provides VLAN, QoS packet prioritization, rate limiting, IGMP monitoring and management functions
- IEEE 802.3 and 802.1D/802.1Q-compliant
- 10BASE-T/100BASE-TX and HP Auto-MDIX support
- Up to 200 Mbit/s via Turbo MII
- Serial management
 - I²C™ (slave) access to all internal registers
 - MIIM (MDIO) access to PHY-related registers
 - SMI (extended MIIM) access to all internal registers
- Unique virtual PHY feature simplifies software development by mimicking the multiple switch ports as single port PHY
- Single 3.3 V power supply
- 56-pin (8 x 8 mm²) QFN lead-free, RoHS-compliant package
- Temperature range: -40 °C to +85 °C

Applications

- Diagnostic interface for dealership service bay
- Fast software download interface with an On-board Diagnostic (OBD) connector
- Gateway service interface for dealership, aftermarket and repair shop
- In-vehicle engineering development interface
- Vehicle manufacturing test interface for production plant assembly line
- Legislated emissions check and/or safety inspections



Ordering Information:

LAN89303AM Tray

Order No. B10281

LAN89303AMR Tape & Reel

Order No. B10280

Description


The LAN89303 is a full-featured, three port, 10/100 managed Ethernet switch designed for embedded applications where performance, flexibility, ease of integration and system cost control are required. It combines all the functions of a 10/100 switch system, including the switch fabric, packet buffers, buffer manager, Media Access Controllers (MACs), PHY transceivers and serial management. The LAN89303 complies with the IEEE 802.3 (full/half-duplex 10BASE-T and 100BASE-TX) Ethernet protocol specification and 802.1D/802.1Q network management protocol specifications, enabling compatibility with industry standard Ethernet and Fast Ethernet applications. The LAN89303's performance, features and small size make it well-suited for a wide variety of automotive applications including diagnostics, gateway services, in-vehicle engineering development, among others.

TrueAuto

TrueAuto is SMSC's automotive quality process. It has proven its ability to deliver leading-edge quality and services for IC device products to fulfill the needs of the most demanding automotive customers. TrueAuto is a proven total automotive-grade quality approach. TrueAuto IC device robustness begins with SMSC's design for reliability techniques within the silicon IC itself: automotive-grade robustness and testability are designed into the IC. Once available in silicon, the IC is fully-characterized and qualified over a multitude of operating parameters to prove quality under the harshest conditions. In this, SMSC's TrueAuto approach significantly exceeds the usual automotive reliability standards and customer-specific requirements and goes far beyond the stress tests prescribed by the AEC-Q100 specifications. During the fabrication of TrueAuto products, extensive technologies and processes, such as enhanced monitors are used in order to continuously drive improvements in accordance with SMSC's zero Defects per Million (DPM) goals.



Internal Block Overview

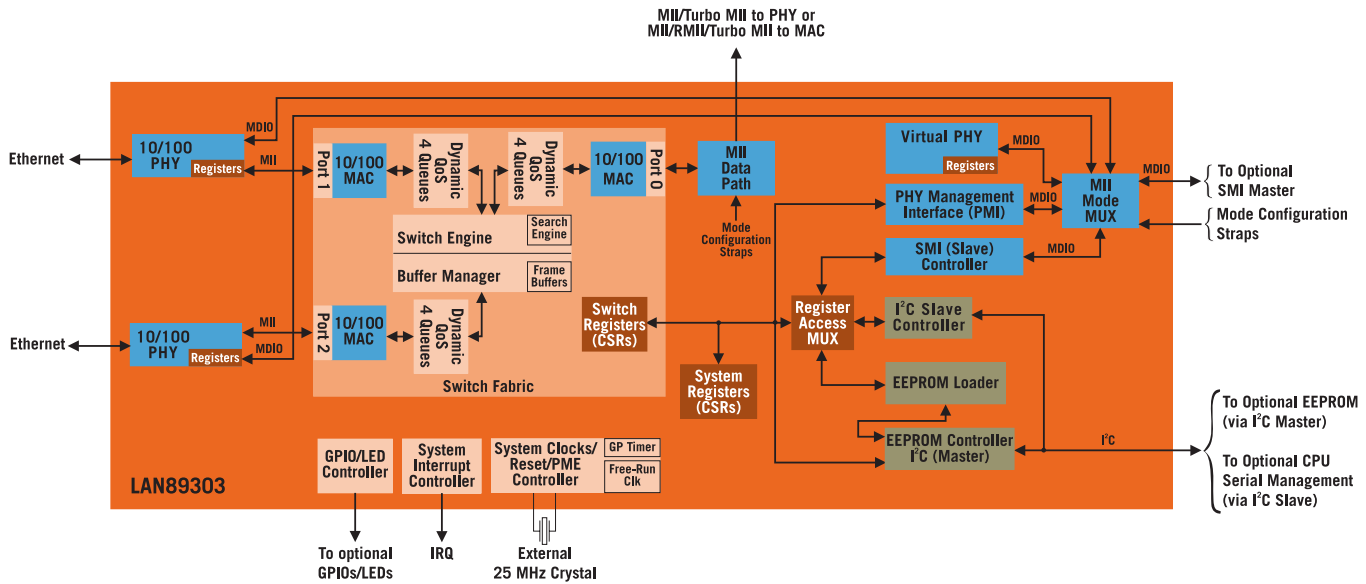

Copyright © 2010 SMSC or its subsidiaries. All rights reserved. Although the information in this document has been checked and is believed to be accurate, no responsibility is assumed for inaccuracies. SMSC reserves the right to make changes to product descriptions and specifications at any time without notice. Contact your local SMSC sales office to obtain the latest product descriptions and specifications before placing your product order. The provision of this information does not convey any licenses under any patent rights or other intellectual property rights of SMSC or others. All sales are expressly conditional on your agreement to the terms and conditions of the most recently dated version of SMSC's standard Terms of Sale Agreement dated before the date of your order. Products may contain design defects or errors which may cause a product's functions to deviate from published product descriptions or specifications. Errata, listing these design defects or errors are available upon request.

SMSC products are not designed, intended, authorized or warranted for use in any life support or other application where product failure could cause or contribute to personal injury or severe property damage. Any and all such uses without prior written approval of an Officer of SMSC and further testing and/or modification will be fully at the risk of the customer. Copies of this document or other SMSC literature, as well as the Terms of Sale Agreement, may be obtained by visiting SMSC's website at <http://www.smc.com>. SMSC and the SMSC logo are registered trademarks of Standard Microsystems Corporation ("SMSC"). Other names mentioned may be trademarks of their respective holders. All claims made herein speak as of the date of this material. The company does not undertake to update such statements. (05/10)

WEEE-Reg.-No. DE55114090