

## SURFACE MOUNT ZENER VOLTAGE DIODE

MMSZ4697

SOD-123  
PLASTIC PACKAGE



### Marking

MMSZ4697 = DE

### ABSOLUTE MAXIMUM RATINGS $T_a=25^\circ\text{C}$ (unless specified otherwise)

DESCRIPTION	SYMBOL	VALUE	UNIT
Junction Temperature	$T_j$	- 55 to +150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to +150	$^\circ\text{C}$
Power Dissipation at $T_a=25^\circ\text{C}$	$P_D$	500	mW
Derate Above $25^\circ\text{C}$		6.7	mW/ $^\circ\text{C}$
Thermal Resistance Junction to Ambient	$R_{th(j-a)}$	340	$^\circ\text{C/W}$
Thermal Resistance Junction to Lead	$R_{th(j-L)}$	150	$^\circ\text{C/W}$
Maximum Voltage Change (Note1)	$\Delta V_Z$	100	mV
Lead Solder Temperature max 10sec duration	$T_L$	260	$^\circ\text{C}$
Nominal Zener Voltage ( $V_Z$ ) at 50 $\mu\text{A}$		10	V


### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Zener Voltage	$V_Z$	$I_{ZT}=50\mu\text{A}$ D.C	9.50		10.50	V
Reverse Leakage	$I_R$	$I_R=7.6\text{V}$			1.0	$\mu\text{A}$
Forward Voltage	$V_F$	$I_F=10\text{mA}$			0.9	V
Delta Zener Voltage (Note1)	$\Delta V_Z$	$I_{ZT}=100\mu\text{A}$ to 10 $\mu\text{A}$			0.1	V

Note1:- Voltage change is equal to the difference between  $V_Z$  at 100 $\mu\text{A}$  and  $V_Z$  at 10 $\mu\text{A}$


MMSZ4697Rev260606E

PACKAGE SOD-123 FL

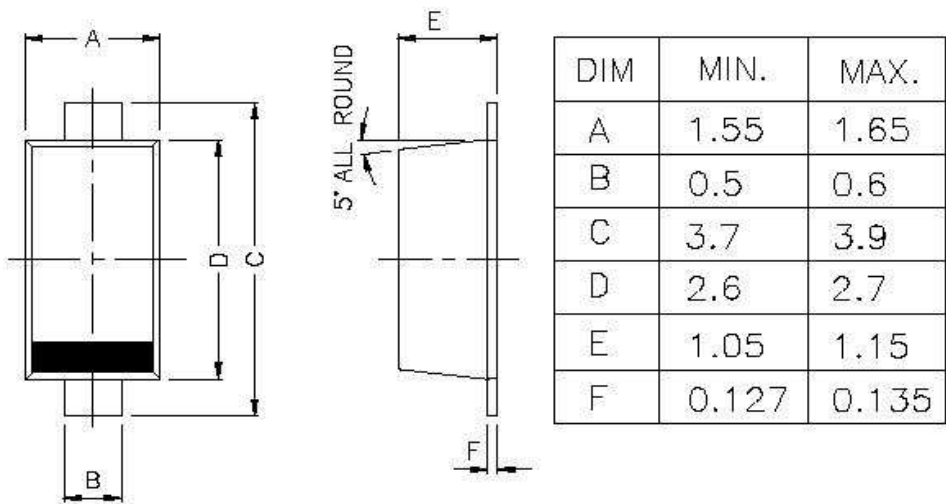

All dimensions are in mm

CATHODE IS MARKED BY BAND

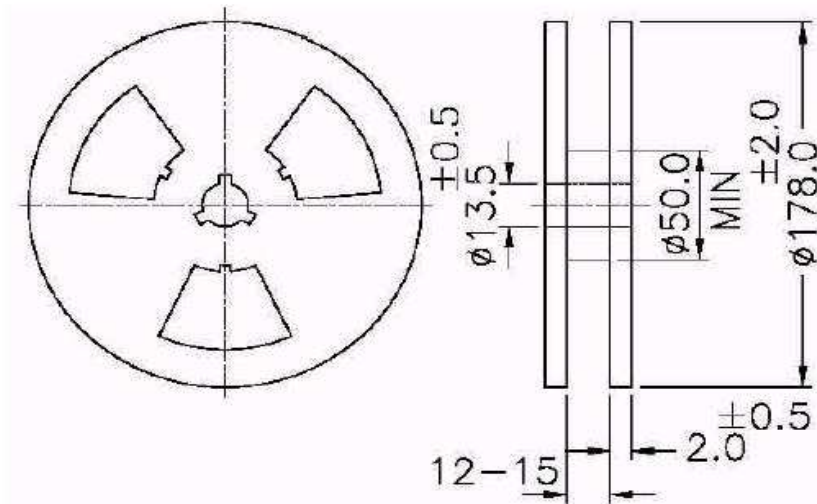

ALL DIMENSIONS ARE IN mm  
 REEL  $\phi$  178 mm (7")  
 3000 Pcs / REEL

### Component Disposal Instructions

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

### **Disclaimer**

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of  
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119

email@cdil.com www.cdilsemi.com