


**NPN EPITAXIAL SILICON POWER TRANSISTORS**

**MJE13002  
MJE13003**

**TO-126  
Plastic Package**

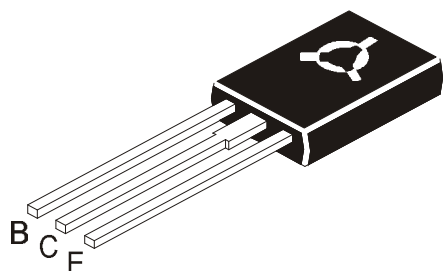

**Suitable for Switching Regulators, Inverters, Motor Control Solenoid/Relay Drivers and Deflection Circuits**

**ABSOLUTE MAXIMUM RATINGS**

DESCRIPTION	SYMBOL	MJE13002	MJE13003	UNIT
Collector Emitter Voltage	$V_{CEO(sus)}$	300	400	V
Collector Emitter Voltage	$V_{CEV}$	600	700	V
Emitter Base Voltage	$V_{EBO}$		9.0	V
Collector Current Continuous	$I_C$		1.5	A
Peak	$*I_{CM}$		3.0	A
Base Current Continuous	$I_B$		0.75	A
Peak	$*I_{BM}$		1.5	A
Emitter Current Continuous	$I_E$		2.25	A
Peak	$*I_{EM}$		4.5	A
Total Power Dissipation @ $T_a=25^\circ\text{C}$	$P_D$		1.4	W
Derate Above $25^\circ\text{C}$			11.2	mW/ $^\circ\text{C}$
Total Power Dissipation @ $T_c=25^\circ\text{C}$	$P_D$		40	W
Derate Above $25^\circ\text{C}$			320	mW/ $^\circ\text{C}$
Operating And Storage Junction Temperature Range	$T_j, T_{stg}$		- 65 to 150	$^\circ\text{C}$

**THERMAL RESISTANCE**

Junction to Case	$R_{th(j-c)}$		3.12	$^\circ\text{C/W}$
Junction to Ambient in free air	$R_{th(j-a)}$		89	$^\circ\text{C/W}$
Maximum Load Temperature for Soldering Purposes 1/8" from Case for 5 Seconds	$T_L$		275	$^\circ\text{C}$

\*Pulse Test: Pulse Width=5ms, Duty Cycle $\leq$ 10%


**ELECTRICAL CHARACTERISTICS ( $T_c=25^\circ\text{C}$  unless specified otherwise)**

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Collector Emitter Sustaining Voltage	$**V_{CEO(sus)}$	$I_C=10\text{mA}, I_B=0$ <b>MJE13002</b> <b>MJE13003</b>	300 400			V V
Collector Cutoff Current	$I_{CEV}$	$V_{CEV}=\text{Rated Value}, V_{BE(off)}=1.5\text{V}$			1.0	mA
		$V_{CEV}=\text{Rated Value}, V_{BE(off)}=1.5\text{V}, T_c=100^\circ\text{C}$			5.0	mA
Emitter Cutoff Current	$I_{EBO}$	$V_{EB}=9\text{V}, I_C=0$			1.0	mA

# NPN SILICON POWER TRANSISTORS

MJE13002  
MJE13003

TO126  
Plastic Package

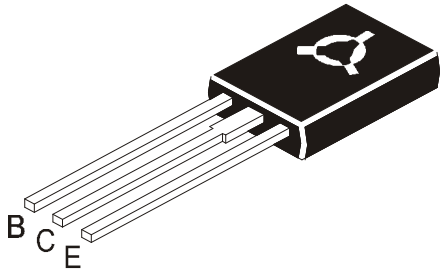

## ELECTRICAL CHARACTERISTICS ( $T_C=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
DC Current Gain	** $\eta_{FE}$	$I_C=0.5\text{A}, V_{CE}=2\text{V}$ $I_C=1\text{A}, V_{CE}=2\text{V}$	8 5		40 25	
Collector Emitter Saturation Voltage	** $V_{CE(sat)}$	$I_C=0.5\text{A}, I_B=0.1\text{A}$ $I_C=1\text{A}, I_B=0.25\text{A}$ $I_C=1.5\text{A}, I_B=0.5\text{A}$ $I_C=1\text{A}, I_B=0.25\text{A}, T_C=100^\circ\text{C}$			0.5 1.0 3.0 1.0	V V V V
Base Emitter Saturation Voltage	** $V_{BE(sat)}$	$I_C=0.5\text{A}, I_B=0.1\text{A}$ $I_C=1\text{A}, I_B=0.25\text{A}$ $I_C=1\text{A}, I_B=0.25\text{A}, T_C=100^\circ\text{C}$			1.0 1.2 1.1	V V V

## DYNAMIC CHARACTERISTICS

Transition Frequency	$f_T$	$I_C=100\text{mA}, V_{CE}=10\text{V}$ $f=1\text{MHz}$	4.0			MHz
Output Capacitance	$C_{ob}$	$V_{CB}=10\text{V}, I_E=0, f=0.1\text{MHz}$		21		pF

## Resistive Load


Delay Time	$t_d$	$V_{CC}=125\text{V}, I_C=1\text{A},$ $I_{B1}=I_{B2}=0.2\text{A}, t_p=25\mu\text{s}, \text{Duty}$ $\text{Cycle} \leq 1\%$			0.1	$\mu\text{s}$
Rise Time	$t_r$				1.0	$\mu\text{s}$
Storage Time	$t_s$				4.0	$\mu\text{s}$
Fall Time	$t_f$				0.7	$\mu\text{s}$

## Inductive Load, Clamped

Voltage Storage Time	$t_{sv}$	$V_{Clamp}=300\text{V}, I_C=1\text{A},$ $I_{B1}=0.2\text{A}, V_{BE(off)}=5\text{V},$ $T_C=100^\circ\text{C}$			4.00	$\mu\text{s}$
Crossover Time	$t_C$				0.75	$\mu\text{s}$
Fall Time	$t_{fi}$			0.15		$\mu\text{s}$


\*\*Pulse Test: Pulse Width=300 $\mu\text{s}$ , Duty Cycle $\leq 2\%$

TO-126 (SOT-32) Plastic Package

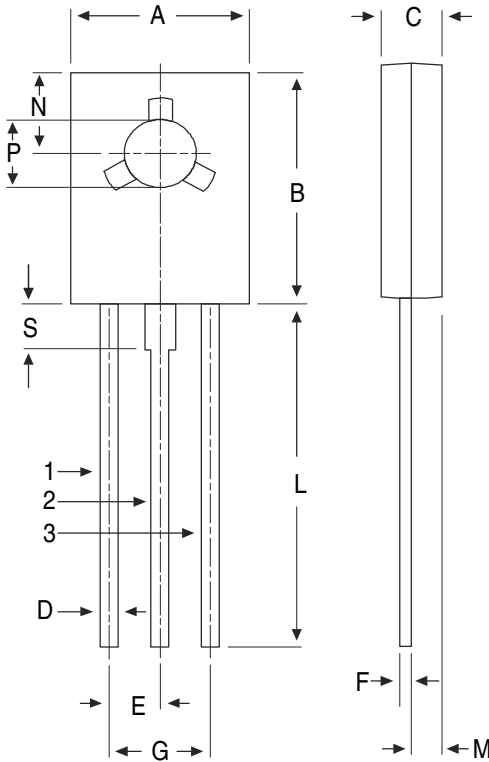

DIM	MIN	MAX
A	7.4	7.8
B	10.5	10.8
C	2.4	2.7
D	0.7	0.9
E	2.25 TYP.	
F	0.49	0.75
G	4.5 TYP.	
L	15.7 TYP.	
M	1.27 TYP.	
N	3.75 TYP.	
P	3.0	3.2
S	2.5 TYP.	



All dimensions in mm.

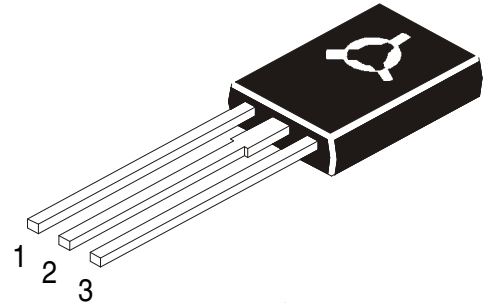

Pin Configuration

1. Base
2. Collector
3. Emitter

TO-126 (SOT-32) Plastic Package

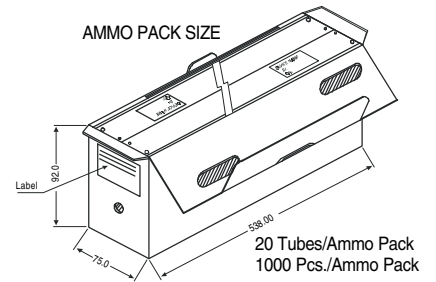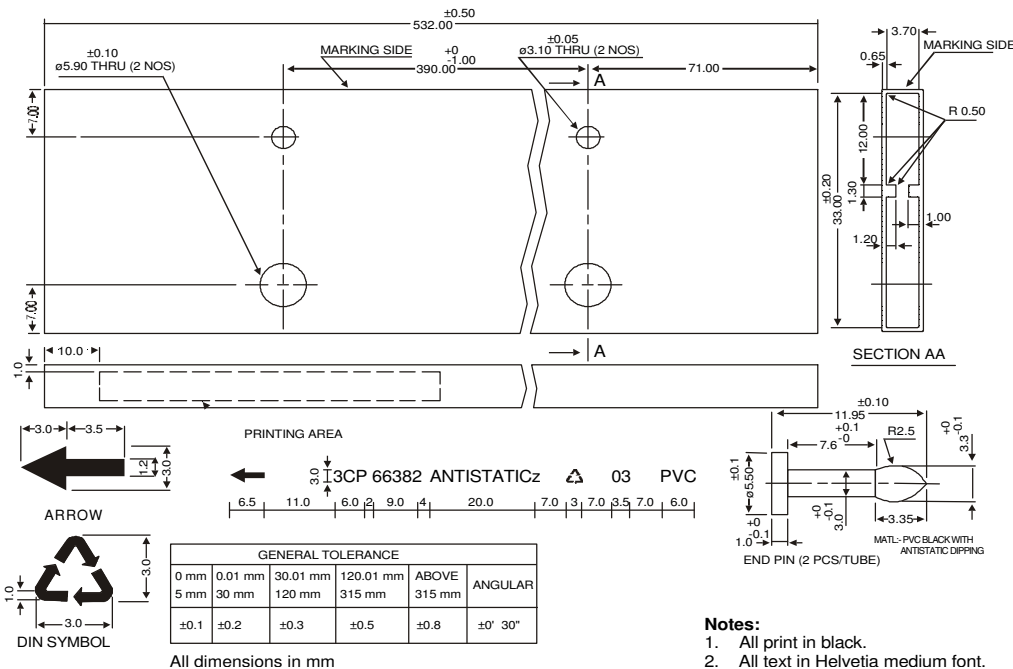

Packing Detail

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
TO-126 Bulk	500 pcs/polybag	340 gm/500 pcs	3" x 7.5" x 7.5"	2K	17" x 15" x 13.5"	32K	31 kgs
TO-126 Tube	50 pcs/tube	73 gm/50 pcs	3" x 3.7" x 21.5"	1K	19" x 19" x 19"	10K	15 kgs

### **Disclaimer**

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of  
**Continental Device India Limited**

C-120 Naraina Industrial Area, New Delhi 110 028, India.  
Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119  
email@cdil.com www.cdilsemi.com