


COMPLEMENTARY DARLINGTON PLASTIC POWER TRANSISTORS

MJD122 NPN
MJD127 PNP

DPAK (TO-252)
Plastic Package

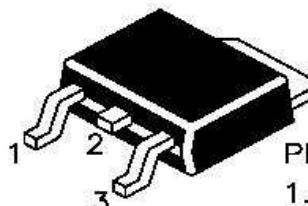

PIN CONFIGURATION

1. BASE
2. COLLECTOR
3. Emitter

Designed for General Purpose Amplifier and Low Speed Switching Applications

ABSOLUTE MAXIMUM RATINGS

| DESCRIPTION | SYMBOL | VALUE | UNIT |
|---|----------------|--------------|--------------------------|
| Collector Base Voltage | V_{CBO} | 100 | V |
| Collector Emitter Voltage | V_{CEO} | 100 | V |
| Emitter Base Voltage | V_{EBO} | 5 | V |
| Collector Current Continuous | I_C | 8 | A |
| Collector Current Peak | I_C | 16 | A |
| Base Current | I_B | 120 | mA |
| Total Power Dissipation $T_c=25^\circ\text{C}$ Derate Above 25°C | P_D | 20 0.16 | W W/ $^\circ\text{C}$ |
| Operating and Storage Junction Temperature Range | T_j, T_{stg} | - 65 to +150 | $^\circ\text{C}$ |

THERMAL CHARACTERISTICS

| | | | |
|------------------|---------------|------|--------------------|
| Junction to Case | $R_{th(j-c)}$ | 6.25 | $^\circ\text{C/W}$ |
|------------------|---------------|------|--------------------|

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$ unless specified otherwise)

| DESCRIPTION | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|--------------------------------------|-----------------------|--|-------------|-----|--------|---------------|
| Collector Emitter Sustaining Voltage | V_{CEO} | $I_C=30\text{mA}, I_B=0$ | 100 | | | V |
| Collector Cut Off Current | I_{CEO} | $V_{CE}=50\text{V}, I_B=0$ | | | 10 | μA |
| Collector Cut Off Current | I_{CBO} | $V_{CB}=100\text{V}, I_E=0$ | | | 10 | μA |
| Emitter Cut Off Current | I_{EBO} | $V_{EB}=5\text{V}, I_C=0$ | | | 2 | mA |
| DC Current Gain | h_{FE} | $I_C=4\text{A}, V_{CE}=4\text{V}$ $I_C=8\text{A}, V_{CE}=4\text{V}$ | 1000 100 | | 12000 | |
| Collector Emitter Saturation Voltage | $V_{CE(\text{sat})}$ | $I_C=4\text{A}, I_B=16\text{mA}$ $I_C=8\text{A}, I_B=80\text{mA}$ | | | 2 4 | V |
| Base Emitter Saturation Voltage | $*V_{BE(\text{sat})}$ | $I_C=8\text{A}, I_B=80\text{mA}$ | | | 4.5 | V |
| Base Emitter On Voltage | $V_{BE(\text{on})}$ | $I_C=4\text{A}, V_{CE}=4\text{V}$ | | | 2.8 | V |


DYNAMIC CHARACTERISTICS

| | | | | | | |
|--------------------------------|------------|---|-----|--|------------|-----|
| Current Gain Bandwidth product | $ h_{fe} $ | $V_{CE}=4\text{V}, I_C=3\text{A}, f=1\text{MHz}$ | 4 | | | MHz |
| Output Capacitance | C_{ob} | $I_E=0, V_{CB}=10\text{V}, f=0.1\text{MHz}$ MJD127 MJD122 | | | 300 200 | pF |
| Small Signal Current Gain | h_{fe} | $I_C=3\text{A}, V_{CE}=4\text{V}, f=1\text{kHz}$ | 300 | | | |


*Pulse test: Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$

MJD122_127 Rev290704E


PACKAGE DPAK

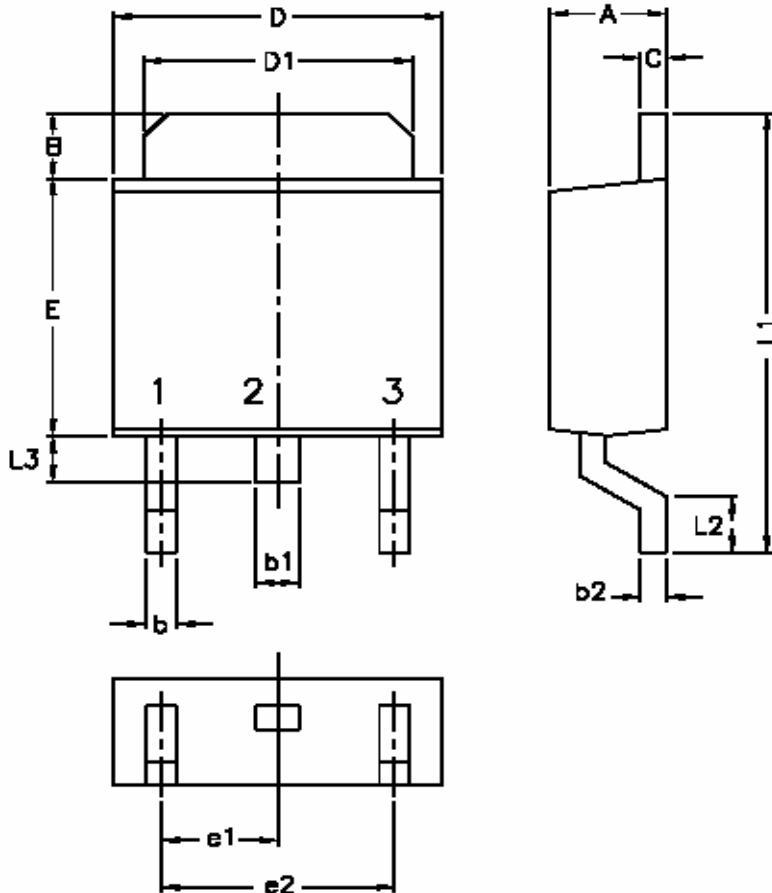

| DIM | MIN. | MAX. |
|-----|-------|-------|
| A | 2.18 | 2.43 |
| B | 0.889 | 1.50 |
| b | 0.550 | 0.889 |
| b1 | 0.75 | 0.85 |
| b2 | 0.46 | 0.56 |
| C | 0.46 | 0.56 |
| D | 6.35 | 6.75 |
| D1 | 4.95 | 5.46 |
| E | 5.40 | 6.22 |
| e1 | 2.25 | 2.35 |
| e2 | 4.50 | 4.70 |
| L1 | 9.25 | 9.75 |
| L2 | 0.5 | — |
| L3 | 0.90 | 1.10 |

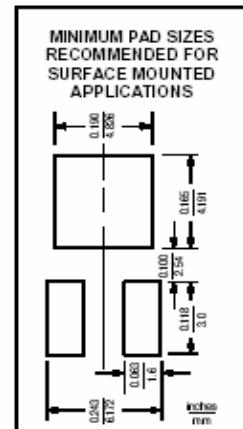

ALL DIMENSIONS ARE IN mm

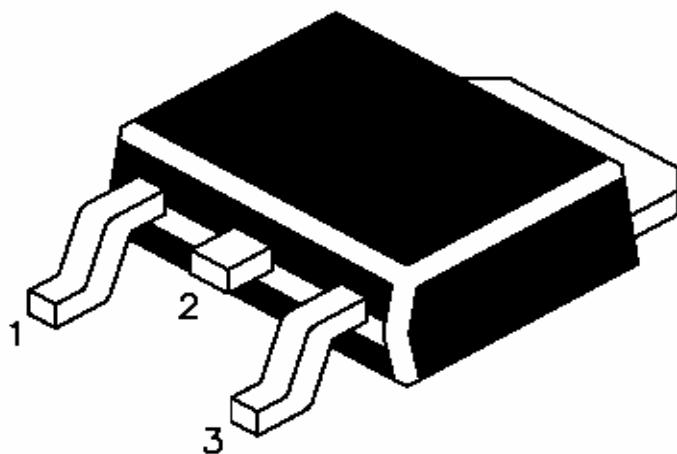


PIN CONFIGURATION

1. BASE
2. COLLECTOR
3. Emitter

MJD122 NPN
MJD127 PNP

DPAK (TO-252)
Plastic Package


DPAK PACKING TUBE

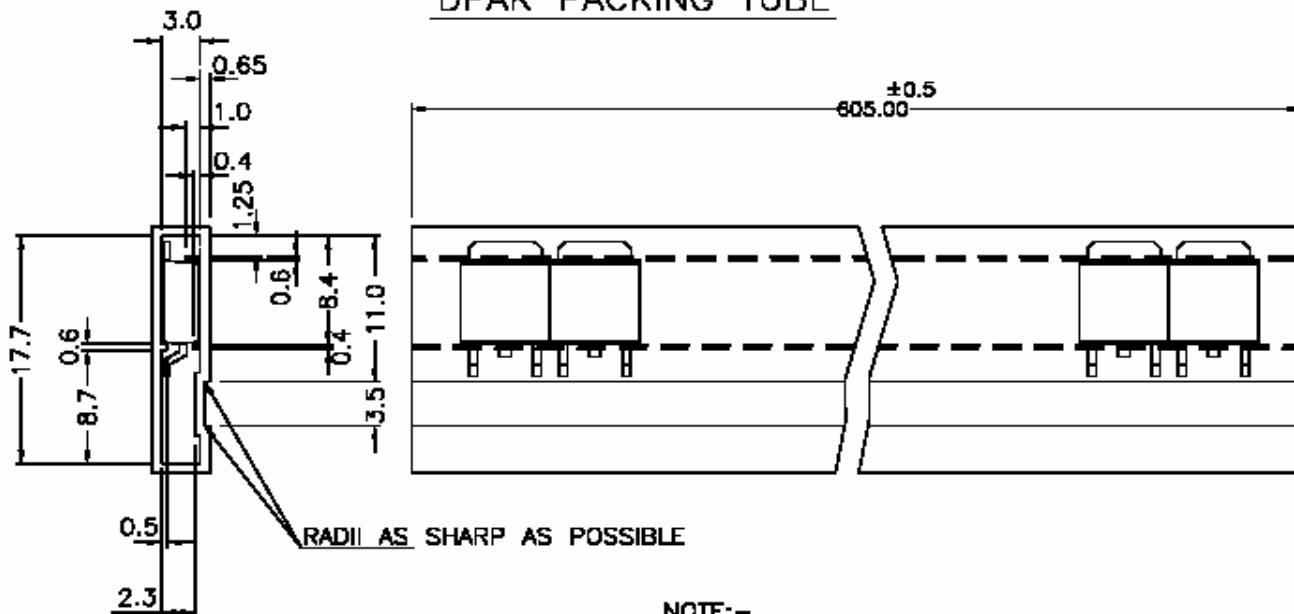


NOTE:-
80 Pcs/TUBE
2.5 K/REEL
ALL DIMENSIONS ARE IN mm

MJD122_127 Rev290704E

DPAK TAPE & REEL SPECIFICATION

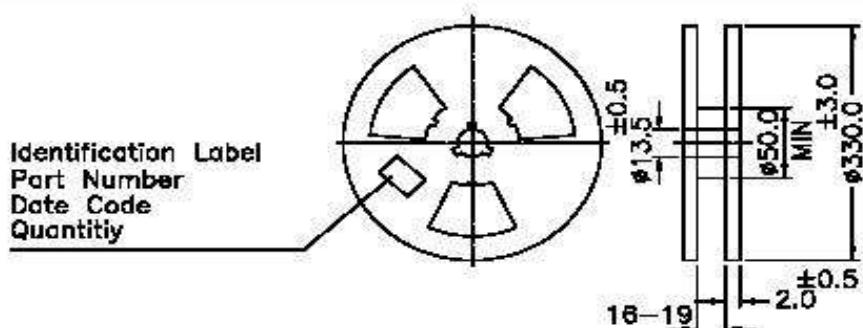


TAPE & REEL

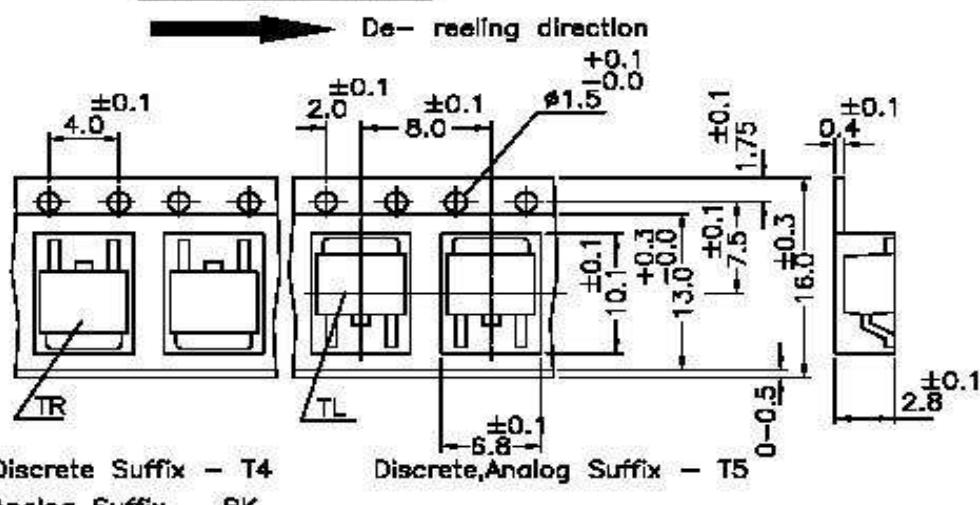

Notes:-

A maximum of three consecutive components may be missing. Provided this gap is followed by six consecutive components.

De- reeling direction

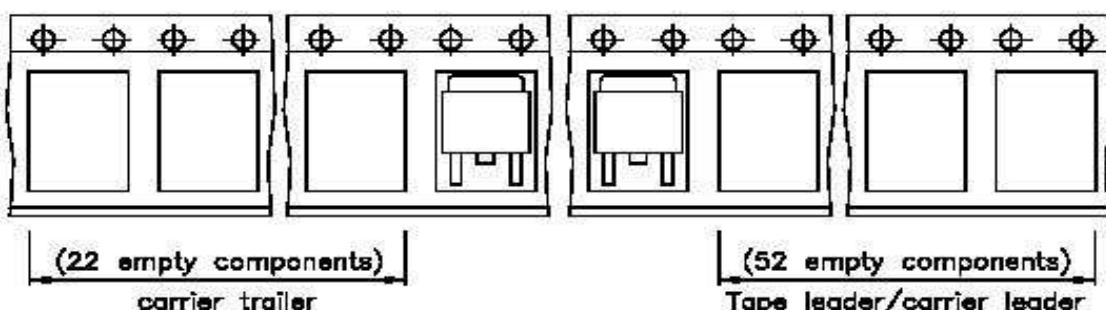

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119
email@cdil.com www.cdilsemi.com