


## PNP SILICON PLANAR SWITCHING TRANSISTORS

**2N3496**  
**2N3497**



**TO-18**  
**Metal Can Package**

**General Purpose Transistors for Switching and Linear Applications.**

**DC Amplifier & Driver For Industrial Applications**

**ABSOLUTE MAXIMUM RATINGS (Ta=25°C unless specified otherwise)**

DESCRIPTION	SYMBOL	2N3496	2N3497	UNIT
Collector Emitter Voltage	$V_{CEO}$	80	120	V
Collector Base Voltage	$V_{CBO}$	80	120	V
Emitter Base Voltage	$V_{EBO}$	<-----4.5----->		V
Collector Current Continuous	$I_C$	<-----100----->		mA
Power Dissipation @Ta=25°C	$P_D$	:-----400-----		mW
Derate Above 25°C		<-----2.28----->		mW/°C
Power Dissipation @ Tc=25°C	$P_D$	<-----1.2----->		W
Derate Above 25°C		<-----6.85----->		mW/°C
Operating and Storage Junction Temperature Range	$T_j, T_{stg}$	-65 to +200		°C


**ELECTRICAL CHARACTERISTICS (Ta=25°C unless specified otherwise )**

DESCRIPTION	SYMBOL	TEST CONDITION	2N3496		2N3497		UNIT
			MIN	MAX	MIN	MAX	
Collector Emitter Breakdown Voltage	$BV_{CEO}^*$	$I_C=10mA, I_B=0$	80		120		V
Collector Base Breakdown Voltage	$BV_{CBO}$	$I_C=10\mu A, I_E=0$	80		120		V
Emitter Base Breakdown Voltage	$BV_{EBO}$	$I_E=10\mu A, I_C=0$	4.5		4.5		V
Collector Cut off Current	$I_{CBO}$	$V_{CB}=50V, I_E=0$		100			nA
		$V_{CB}=90V, I_E=0$				100	nA
Emitter Cut off Current	$I_{EBO}$	$V_{EB}=3V, I_C=0$		25		25	nA
Collector Emitter Saturation Voltage	$V_{CE(Sat)}$	$I_C=10mA, I_B=1mA$		0.3		0.35	V
Base Emitter Saturation Voltage	$V_{BE(Sat)}$	$I_C=10mA, I_B=1mA$	0.6	0.9	0.6	0.9	V
DC current Gain	$h_{FE}$	$I_C=0.1mA, V_{CE}=10V$	35		35		
		$I_C=1mA, V_{CE}=10V$	40		40		
		$I_C=10mA, V_{CE}=10V$	40		40		
		$I_C=50mA, V_{CE}=10V$	40		40		
		$I_C=100mA, V_{CE}=10V^*$	35				

# PNP SILICON PLANAR SWITCHING TRANSISTORS

2N3496

2N3497



TO-18

Metal Can Package

## ELECTRICAL CHARACTERISTICS (Ta=25°C unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	2N3496		2N3497		UNIT
			MIN	MAX	MIN	MAX	
<b><u>DYNAMIC CHARACTERISTICS</u></b>							
Transition Frequency	$f_T$	$I_C=20\text{mA}, V_{CE}=10\text{V}$ $f=100\text{MHz}$	200		150		MHz
Output Capacitance	$C_{ob}$	$V_{CB}=10\text{V}, I_E=0$ $f=100\text{KHz}$		7		6	pF
Input Capacitance	$C_{ib}$	$V_{EB}=2\text{V}, I_C=0$ $f=100\text{KHz}$		30		30	pF

## SMALL SIGNAL CHARACTERISTICS ( at 1KHz unless otherwise specified)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNIT
Input Impedance	$h_{ie}$	$I_C=10\text{mA}, V_{CE}=10\text{V}$	0.1	1.2	$K\Omega$
Voltage Feedback Ratio	$h_{re}$	$I_C=10\text{mA}, V_{CE}=10\text{V}$		2.0	$\times 10^{-4}$
Small Signal Current Gain	$ h_{fe} $	$I_C=10\text{mA}, V_{CE}=10\text{V}$	40	300	
Output Admittance	$h_{oe}$	$I_C=10\text{mA}, V_{CE}=10\text{V}$		300	$\mu\text{mhos}$
Real Part of Input Impedance	$R_{e(hie)}$	$I_C=20\text{mA}, V_{CE}=10\text{V}$ $f=300\text{MHz}$		30	$\Omega$

## SWITCHING CHARACTERISTICS

Turn on Time	$t_{on}$	$I_C=10\text{mA}, I_{B1}=1\text{A},$ $V_{CC}=30\text{V}$		300	ns
Turn off Time	$t_{off}$	$I_C=10\text{mA}, I_{B1}=I_{B2}=1\text{mA},$ $V_{CC}=30\text{V}$		1000	ns

\*Pulse Condition: Pulse Length  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$



2N3496

2N3497

TO-18


Metal Can Package

### TO-18 Metal Can Package

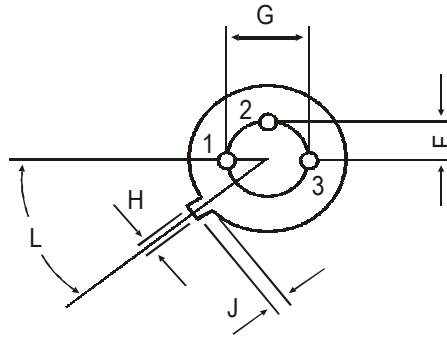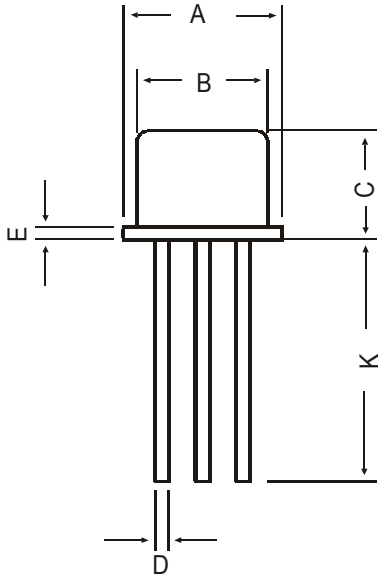

All dimensions in mm.

DIM	MIN	MAX
A	5.24	5.84
B	4.52	4.97
C	4.31	5.33
D	0.40	0.53
E	—	0.76
F	—	1.27
G	—	2.97
H	0.91	1.17
J	0.71	1.21
K	12.70	—
L	45 DEG	



#### PIN CONFIGURATION

1. EMITTER
2. BASE
3. COLLECTOR

### Packing Detail

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
TO-18	1K/polybag	350 gm/1K pcs	3" x 7.5" x 7.5"	5K	17" x 15" x 13.5"	80K	34 kgs

### **Disclaimer**

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD is believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of

**Continental Device India Limited**

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-579 6150 Fax + 91-11-579 9569, 579 5290

e-mail [sales@cdil.com](mailto:sales@cdil.com) [www.cdil.com](http://www.cdil.com)