


DUAL OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJM2141 is a dual operational amplifier with a low voltage operation of $\pm 2\text{V}$ and high output current of 25mA in a small package. Further excellent features of a high slew rate of $3\text{V}/\mu\text{s}$ (typ.), wide bandwidth of 8MHz (typ.), low noise and low distortion make the NJM2141 well-suited for audio, telecommunication and instrumentation applications.

The 2141 is available in 8-lead MSOP package.

■ PACKAGE OUTLINE




NJM2141R
(MSOP8(VSP8))

■ FEATURES

- Operating Voltage $\pm 2\text{V} \sim \pm 10\text{V}$
- Slew Rate $3\text{V}/\mu\text{s}$ typ
- Band width 8MHz typ.
- High Output Current $I_o = 25\text{mA}$
- Bipolar Technology
- Package Outline MSOP8 (VSP8) MEET JEDEC MO-187-DA

■ PIN CONFIGURATION




NJM2141R

PIN FUNCTION

- 1.A OUTPUT
- 2.A -INPUT
- 3.A +INPUT
- 4.V⁻
- 5.B -INPUT
- 6.B +INPUT
- 7.B OUTPUT
- 8.V⁺

■ EQUIVALENT CIRCUIT (1/2 Shown)

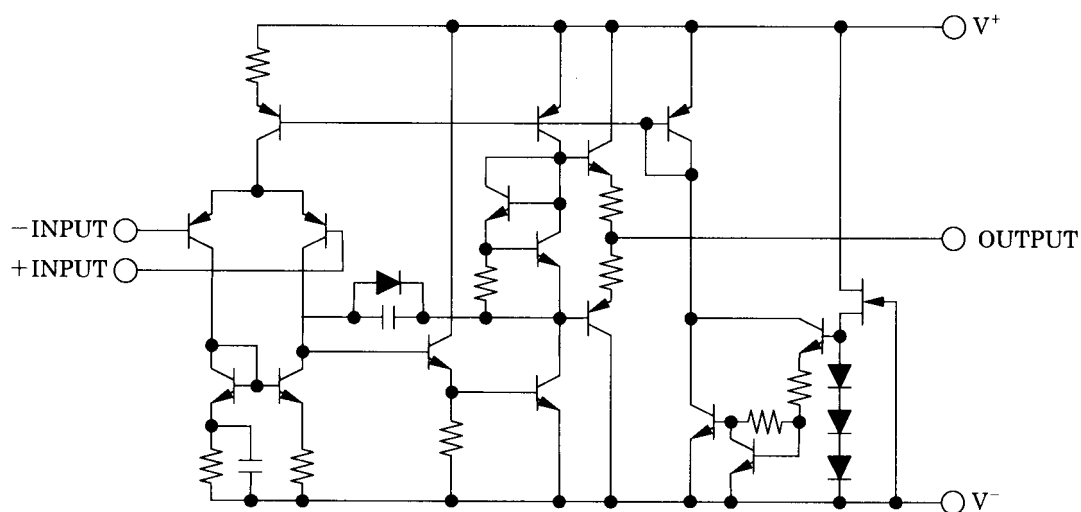

NJM2141

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+/V^-	± 10	V
Differential Input Voltage	V_{ID}	± 15	V
Input Voltage	V_{IC}	± 7.5 (note1)	V
Power Dissipation	P_D	320	mW
Operating Temperature Range	T_{opr}	-20~+75	°C
Storage Temperature Range	T_{stg}	-40~+125	°C







(note1) When input voltage is less than $\pm 7.5V$, the absolute maximum control voltage is equal to the input voltage.

■ ELECTRICAL CHARACTERISTICS






($V^+/V^- = \pm 6V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	$R_S=0\Omega$	-	0.5	6	mV
Input Offset Current	I_{IO}		-	5	200	nA
Input Bias Current	I_B		-	80	500	nA
Input Resistance	R_{IN}		0.3	2.5	-	MΩ
Large Signal Voltage Gain	A_V	$R_L \geq 2k\Omega, V_O = \pm 4V$	86	100	-	dB
Maximum Output Voltage Swing 1	V_{OM1}	$R_L \geq 2k\Omega$	+4.0 -3.5	+5.0 -4.5	-	V
Maximum Output Voltage Swing 2	V_{OM2}	$V^+/V^- = \pm 9V, I_O = 25mA$	+4.0 -4.0	+6.0 -5.0	-	V
Input Common Mode Voltage Range	V_{ICM}		± 4.0	± 4.5	-	V
Common Mode Rejection Ratio	CMR	$R_S \leq 10k\Omega$	70	90	-	dB
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10k\Omega$	76.5	90	-	dB
Operating Current	I_{CC}		-	2.7	5.7	mA
Slew Rate	SR		-	3	-	V/μs
Gain Bandwidth Product	GB		-	8	-	MHz
Equivalent Input Noise Voltage	V_{NI}	RIAA, $R_S = 2k\Omega$, 39kHz LPF	-	1.2	-	μVrms

■ TYPICAL CHARACTERISTICS

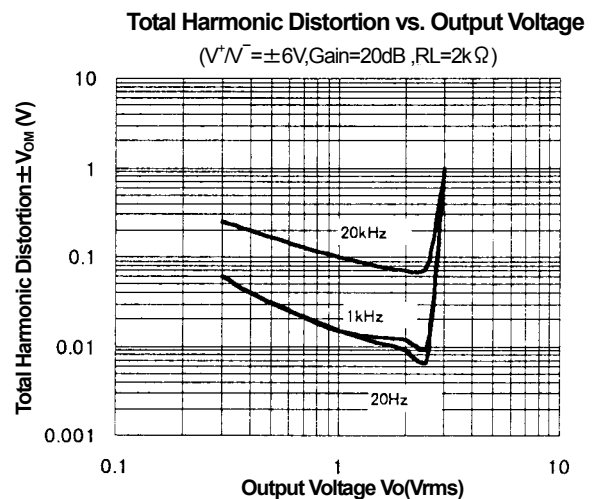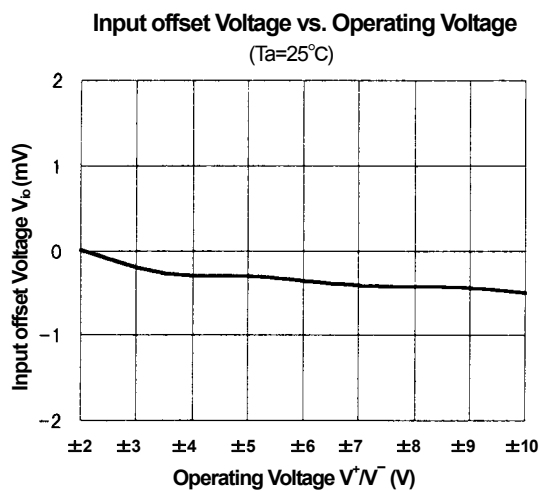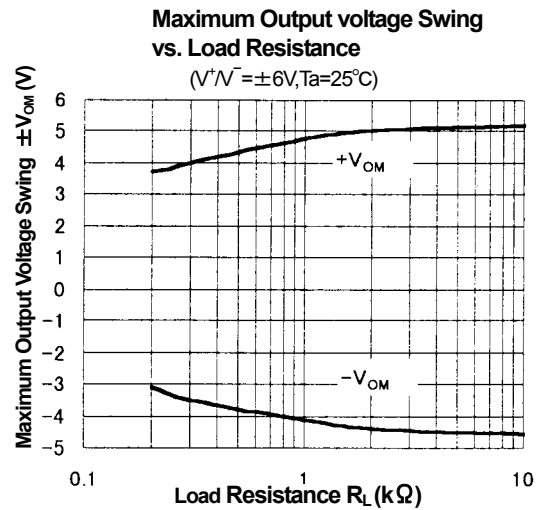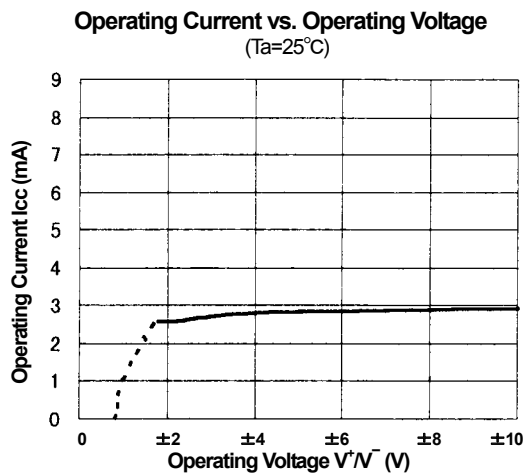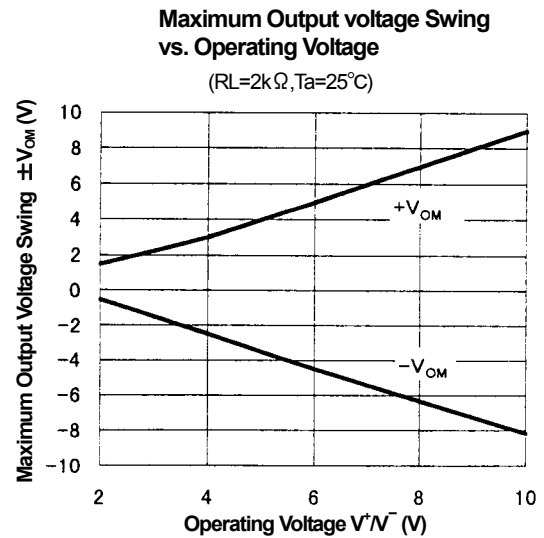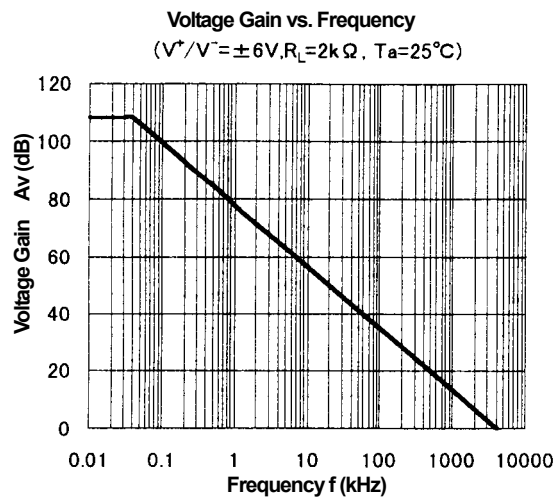

■ TYPICAL CHARACTERISTICS

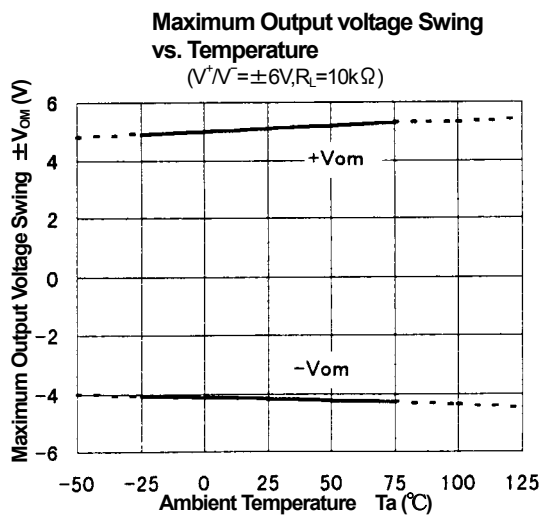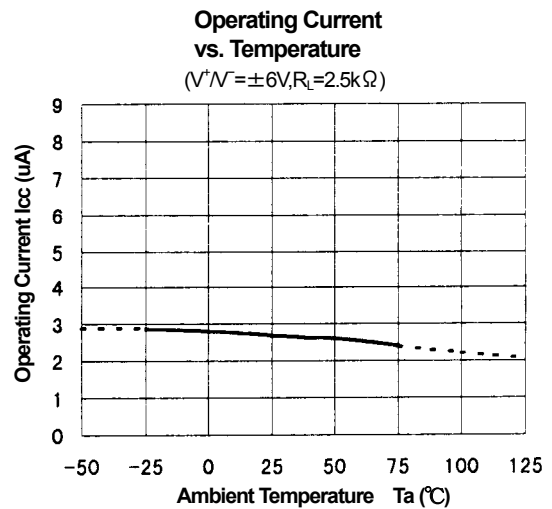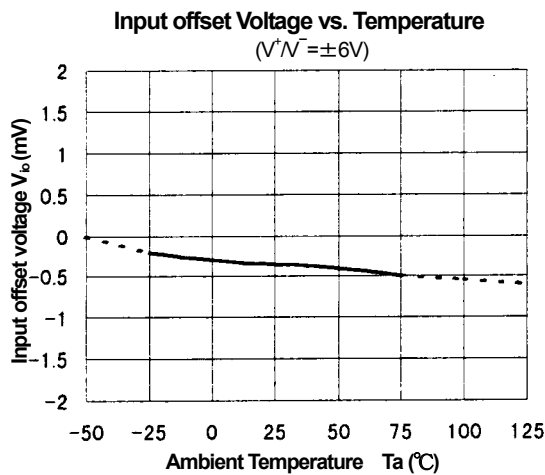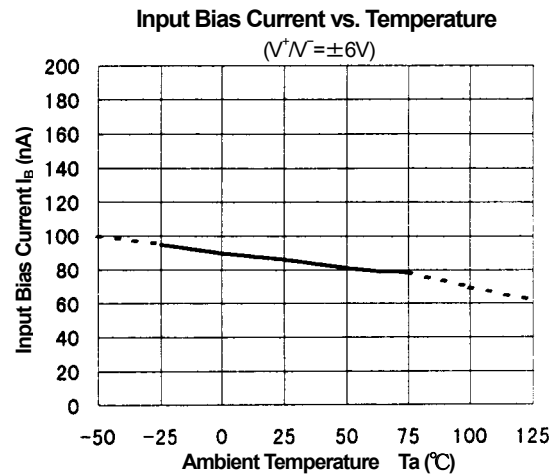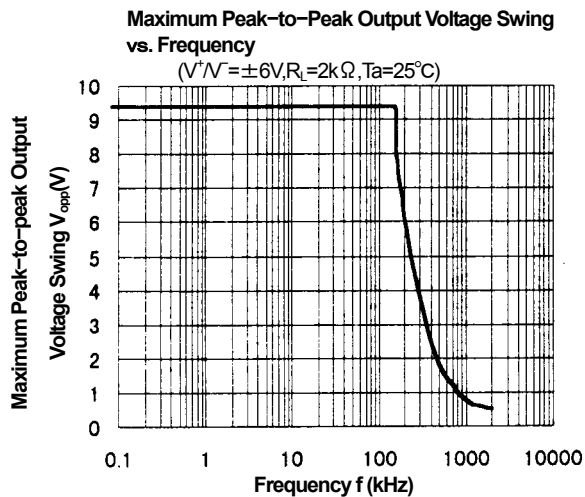

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.