

Inverting Charge Pump IC

■ GENERAL DESCRIPTION

The NJW4191 is the inverting charge pump IC that operates wide 4.7V to 17V input range. With only the external part of an input/output capacitor and a charge pump capacitor, can compose the inverting voltage circuit. It has a high current capability and a corresponding to small-sized capacitor compared with conventional product such as popular 7660/7662.

For usability, it has ON/OFF function, Output Voltage Adjustable function and external synchronous function.

The NJW4191 is suitable for the bias voltage of a liquid crystal panels, CCD, sensors and operational amplifiers.

There is the NJW4190 for doubler voltage output application.

■ PACKAGE OUTLINE



NJW4191R



NJW4191M

■ FEATURES


- Inverted Output -17V max.
- Wide Operating Voltage Range 4.7V to 17V
- Maximum Output Current 55mA max.
- Correspond to Ceramic Capacitor (MLCC)
- V_{OUT} Programmable
- ON/OFF Function
- Built-in Oscillation Circuit 300kHz typ.
- External Synchronization Function divide-by-4 counter (A ver.)
- Thermal Shutdown
- Function Compatible to NJU7660/NJU7662 Inverting Circuit*
- Package Outline

NJW4191R	: MSOP8 (VSP8)**
NJW4191M	: DMP8


* The NJW4191 is not pin compatible to NJU7660/62.

** MEET JEDEC MO-187-DA

■ PIN CONFIGURATION

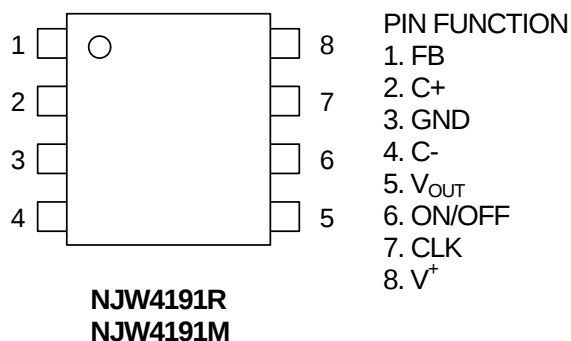

■ BLOCK DIAGRAM

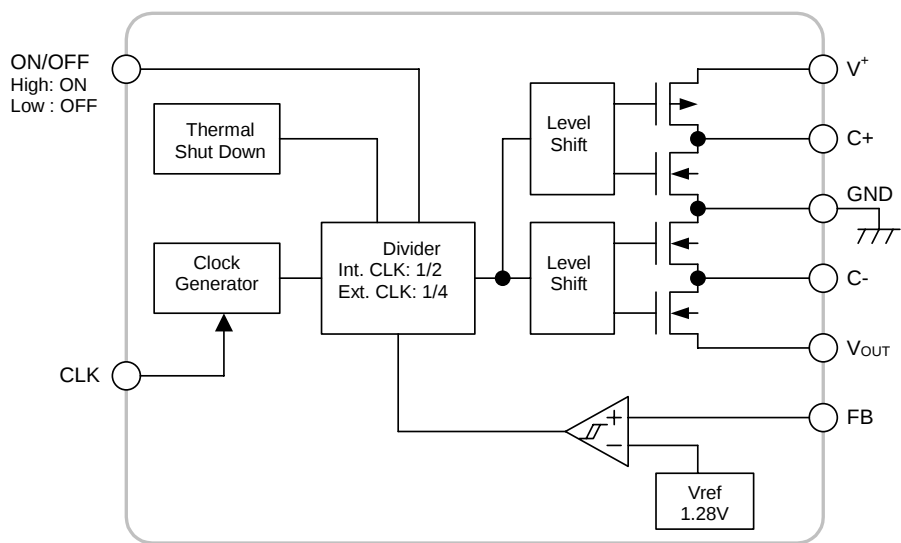

■ PRODUCT CLASSIFICATION

PART NUMBER	Divider
NJW4191R-A	External CLK: 1/4
NJW4191M-A	

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Input Voltage	V ⁺	+20	V
FB pin Voltage	V _{FB}	+6 - V _{OUT}	V
ON/OFF pin Voltage	V _{ON/OFF}	-0.3 to +6	V
CLK pin Voltage	V _{CLK}	-0.3 to +6	V
Maximum Output Current	I _{OUT}	55	mA
Power Dissipation	P _D	MSOP8 (VSP8) : 595 (*1) DMP8 : 530 (*1)	mW
Operating Temperature	T _{opr}	-40 to +85	°C
Storage Temperature	T _{stg}	-40 to +150	°C

(*1): Mounted on glass epoxy board. (76.2×114.3×1.6mm:EIA/JDEC standard size, 2Layers)

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V ⁺	4.7	—	17	V
External CLK Input Range A version (*2)	f _{CLK}	300	—	2,000	kHz
External CLK Duty Input Range	DUTY	45	—	80	%

(*2): The oscillation frequency is output from the V_{OUT} pin that external clock input frequency divided by four (4).

■ ELECTRICAL CHARACTERISTICS

(Unless otherwise noted, $V^+ = 10V$, $V_{ON/OFF} = 5V$, $V_{FB} = V_{OUT}$, $V_{CLK} = GND$, $C1 = C2 = C3 = 1\mu F$, $T_a = 25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
-----------	--------	----------------	------	------	------	------

General Characteristics

Supply Current	I_{DD1}	$V_{ON/OFF} = 5V$, $R_L = \text{no Load}$	—	940	1,220	μA
	I_{DD2}	$V_{ON/OFF} = GND$	—	330	450	μA
Output Resistance	R_O	$I_{OUT} = 20mA$	—	25	34	Ω
Oscillation Frequency	f_{OSC}		—	300	—	kHz
Power Efficiency	P_{EF}	$R_L = 500\Omega$	87	91	—	%
Voltage Conversion Efficiency	V_{EF}	$R_L = \text{no Load}$	97	99.9	—	%

ON/OFF Block

ON Control Voltage	V_{ON}	$V_{ON/OFF} = L \rightarrow H$	1.7	—	5.5	V
OFF Control Voltage	V_{OFF}	$V_{ON/OFF} = H \rightarrow L$	0	—	0.3	V
ON/OFF pin Current	$I_{ON/OFF}$	$V_{ON/OFF} = 1.7V$	—	3.5	7	μA

FB Block


Detection Voltage	V_T	$V_{FB} = L \rightarrow H$	-10%	1.28	+10%	V
FB pin Sink Current	I_{FB}	$V_{FB} = 5.5 - V_{OUT} $	—	0.01	1	μA

CLK Block






CLK Threshold (High)	V_{CLK_H}		2.4	—	5.5	V
CLK Threshold (Low)	V_{CLK_L}		0	—	0.7	V
CLK pin Sink Current	I_{CLK}	$V_{CLK} = 5.5V$	—	6	10	μA

NJW4191




■ TYPICAL APPLICATION

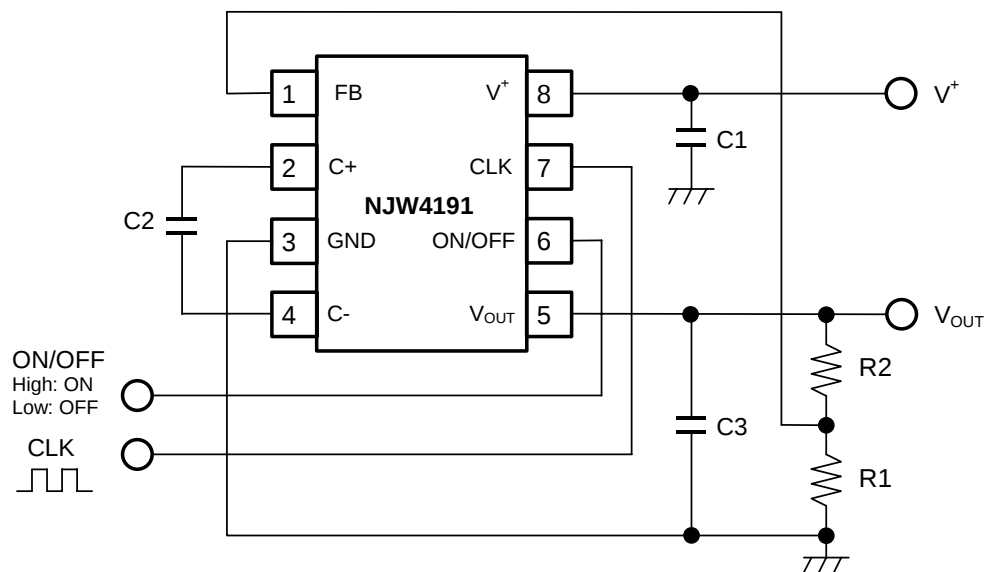

■ CHARACTERISTICS

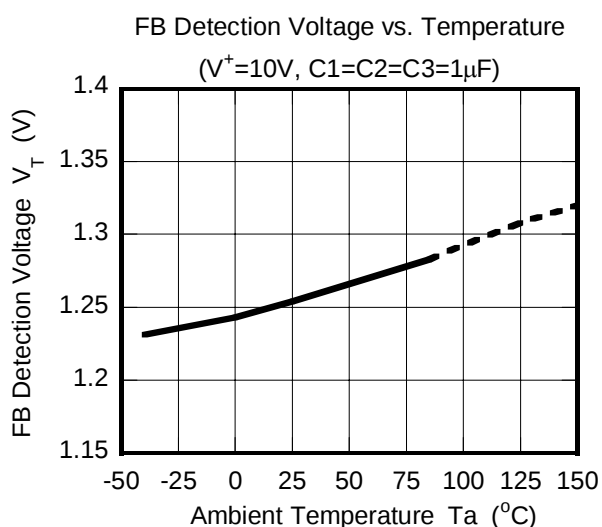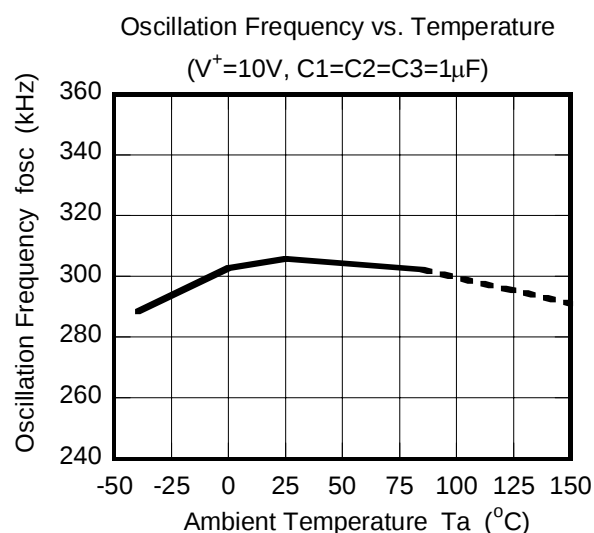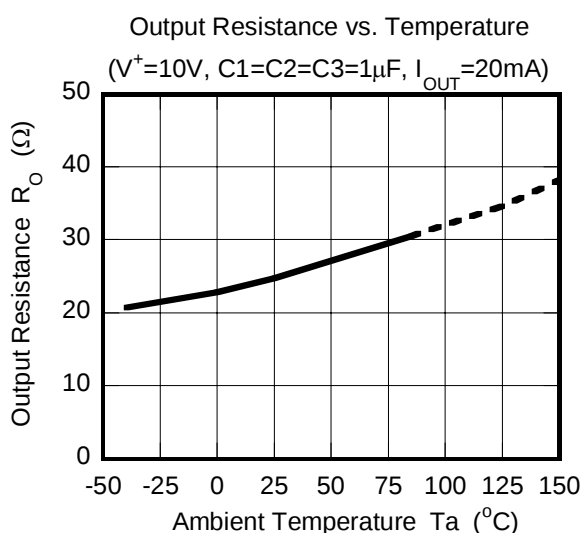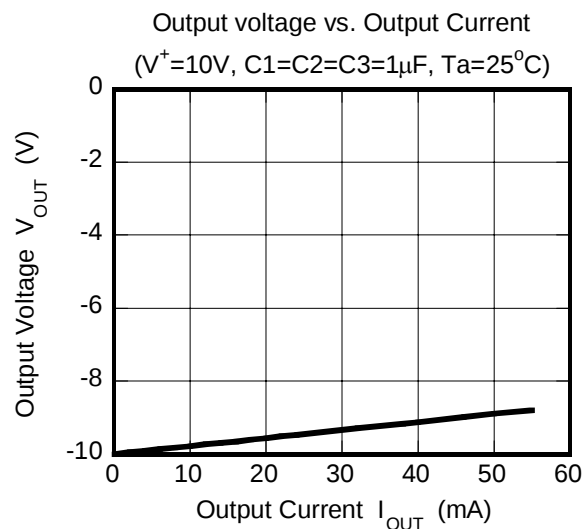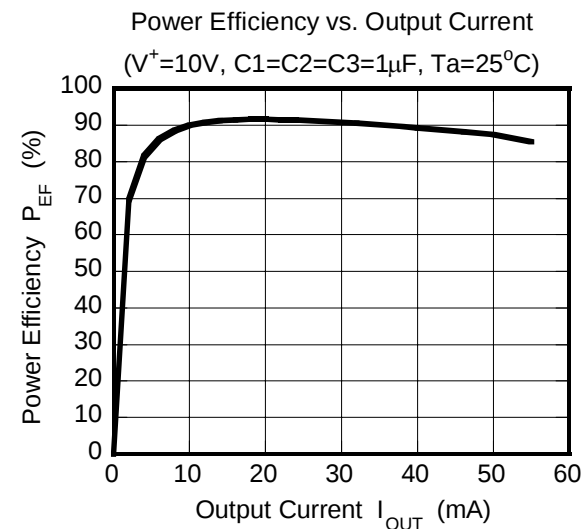

CHARACTERISTICS

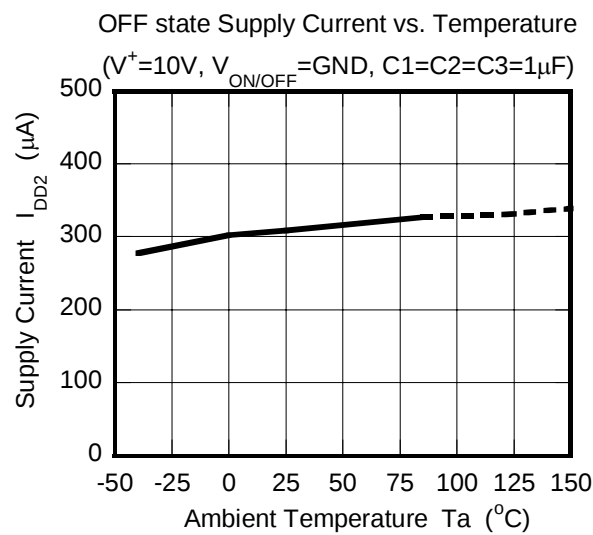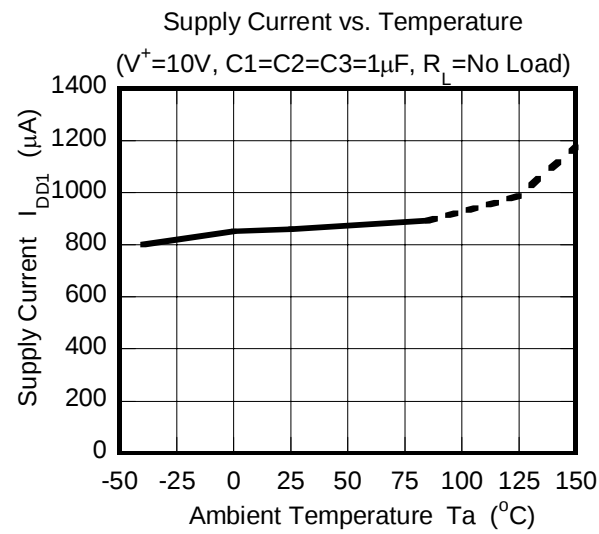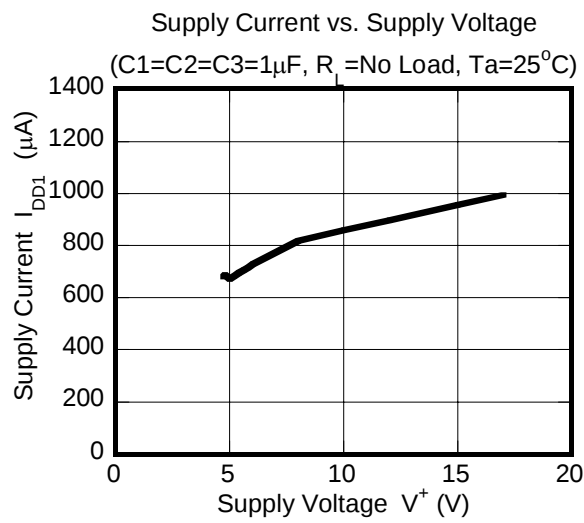

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.