

VIDEO DIFFERENTIAL OUTPUT DRIVER

■GENERAL DESCRIPTION

The NJM2504 is video differential output driver. The single-end signal is converted to the differential signal. The single-end signal can be transmitted by the differential signal by the connection with NJM2507.

And, it is converted to the single-end signal by the NJM2507.

The common mode noise can be removed because of the differential motion transmission, and it is the best for the transmission of car AV system.

■PACKAGE OUTLINE



NJM2504RB1
MSOP8(TVSP8)


■FEATURES

- Operating Voltage 4.5 to 9.5V
- Input: Single-end signal, Output: Differential signal
- Internal 6dB Amplifier
- Internal 75ohm Driver
- Internal SAG Correction Circuit
- Bipolar Technology
- Package Outline MSOP8(TVSP8)*

MSOP8(TVSP8)*


*MEET JEDEC MO-187-DA / THIN TYPE

■PIN CONNECTION



- 1: V+
- 2: Power Save
- 3: VIN
- 4: GND
- 5: Vsagn
- 6: Voutn
- 7: Vsagp
- 8: Voutp

■BLOCK DIAGRAM

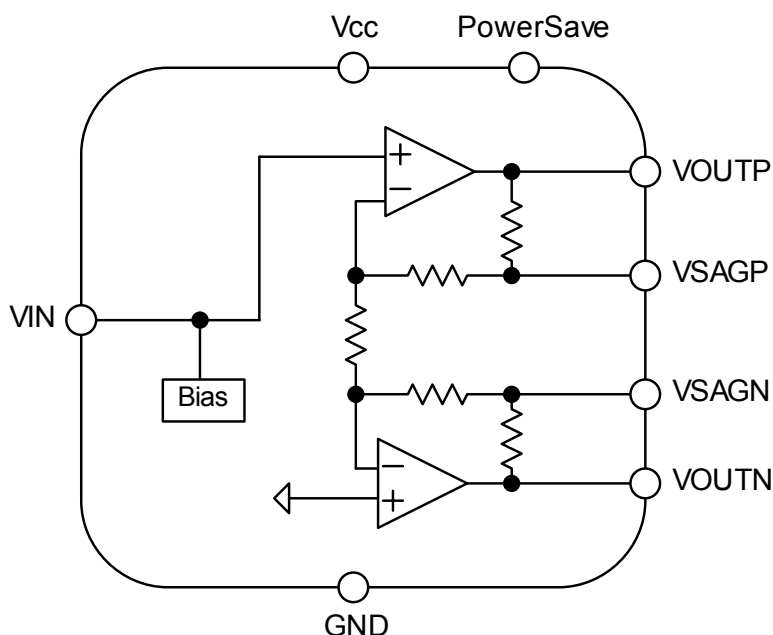

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	10	V
Power Dissipation	P _D	580(Note1)	mW
Operating Temperature Range	T _{opr}	-40 to +85(Note2)	°C
Storage Temperature Range	T _{stg}	-40 to +150	°C

(Note 1) At on a board of EIA/JEDEC specification. (114.3 x 76.2 x 1.6mm 2 layers, FR-4)

(Note 2) It has high operating temperature range product. (-40 to +105°C)

■RECCOMENDED OPERATING CONDITIONS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating voltage	V _{opr}		4.5	-	9.0	V


■ELECTRICAL CHRACTERISTCS (V⁺=5V, R_L=150ohm, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I _{CC}	No signal	-	16	20	mA
Supply Current at Power Save Mode	I _{save}	Power save mode	-	0.3	0.5	mA
Maximum Output Level	V _{om}	Vin=100kHz, sin-signal, THD=1%,	2.2	2.4	-	Vp-p
Voltage Gain	G _v	Vin=1MHz, 1.0Vp-p sin-signal	5.7	6.2	6.7	dB
Frequency Characteristics	G _f	Vin=10MHz/1MHz, 1.0Vpp sin-signal	-1.0	0	1.0	dB
Differential Gain	DG	Vin=1.0Vp-p 10step video signal	-	0.5	-	%
Differential Phase	DP	Vin=1.0Vp-p 10step video signal	-	0.5	-	deg
SW Voltage High Level	V _{thH}		2.2	-	V ⁺	V
SW Voltage Low Level	V _{thL}		0	-	1.0	V
SW Sink Current High Level	I _{thH}	V=5V	-	-	120	μA
SW Sink Current Low Level	I _{thL}	V=0.3V	-	-	8.0	μA


■CONTROL CHRACTERISTIC

PARAMETER	STATUS	MODE
Power Save	H	Power save: OFF Active mode
	L	Power save: ON Non-Active mode (Mute)
	OPEN	Power save: ON Non-Active mode (Mute)

TEST CIRCUIT

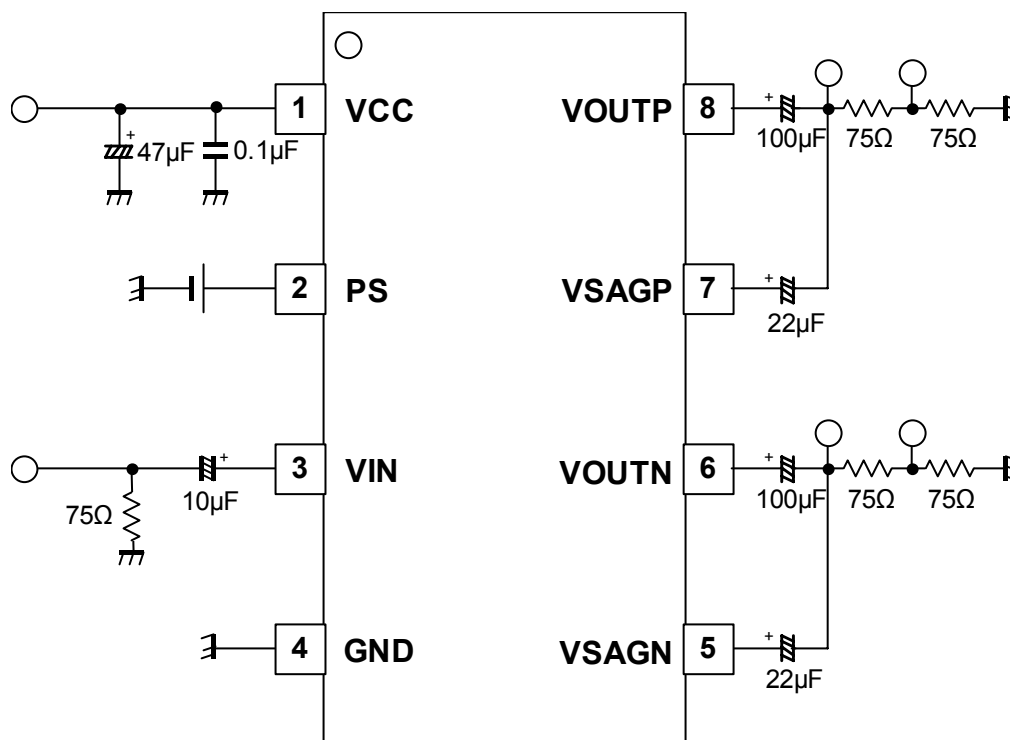


APPLICATION CIRCUIT





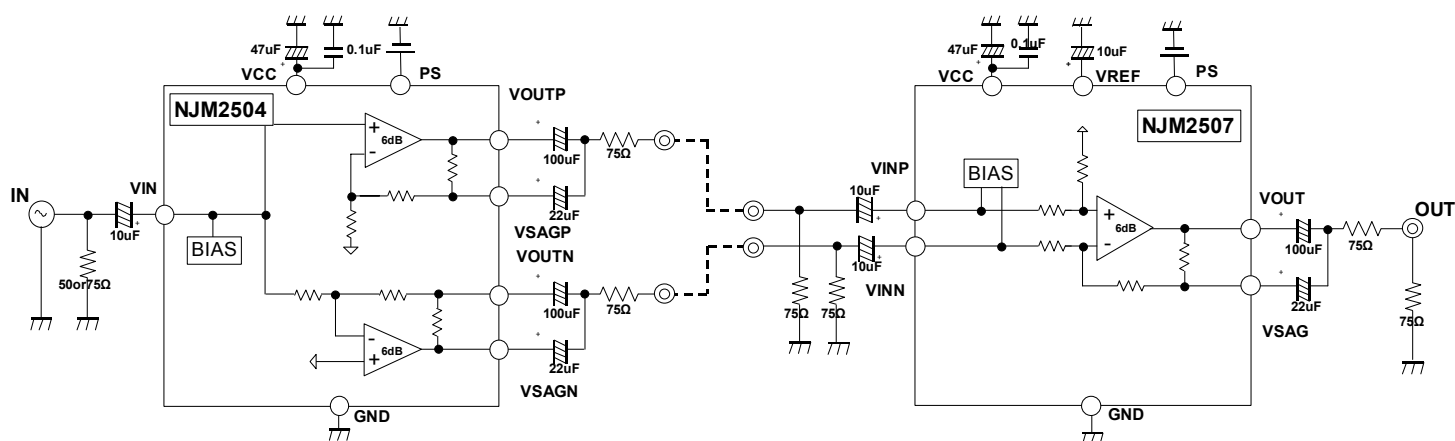


■APPLICATION


When use cable of than 20 meter, voltage gain is attenuated. Please make a adequate evaluation.
Refer to fig.

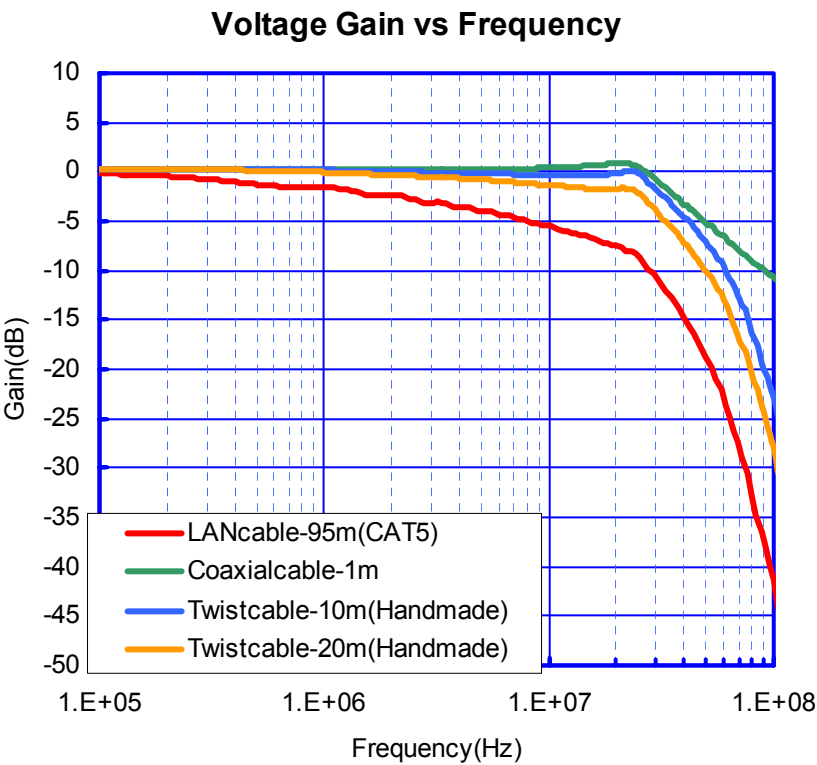







■ EQUIVALENT CIRCUIT (Vcc=5V)

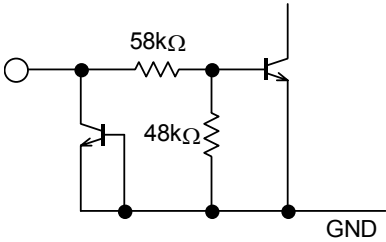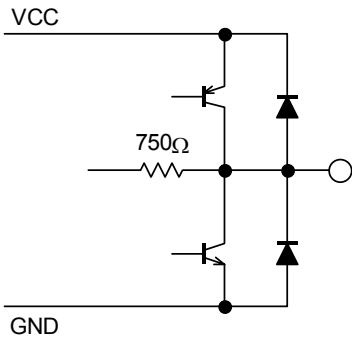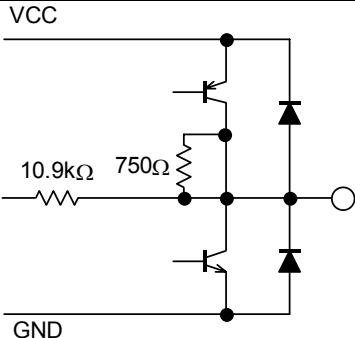PIN No.	PIN NAME	EQUIVALENT CIRCUIT	DC VOLTAGE
1	Vcc		5V
2	Power Save		-
3	VIN		2.5V
4	GND		-
5	VSAGN		2.5V
6 8	VOUTN VOUTP		2.5V
7	VSAGP		2.5V


TYPICAL CHARACTERISTICS

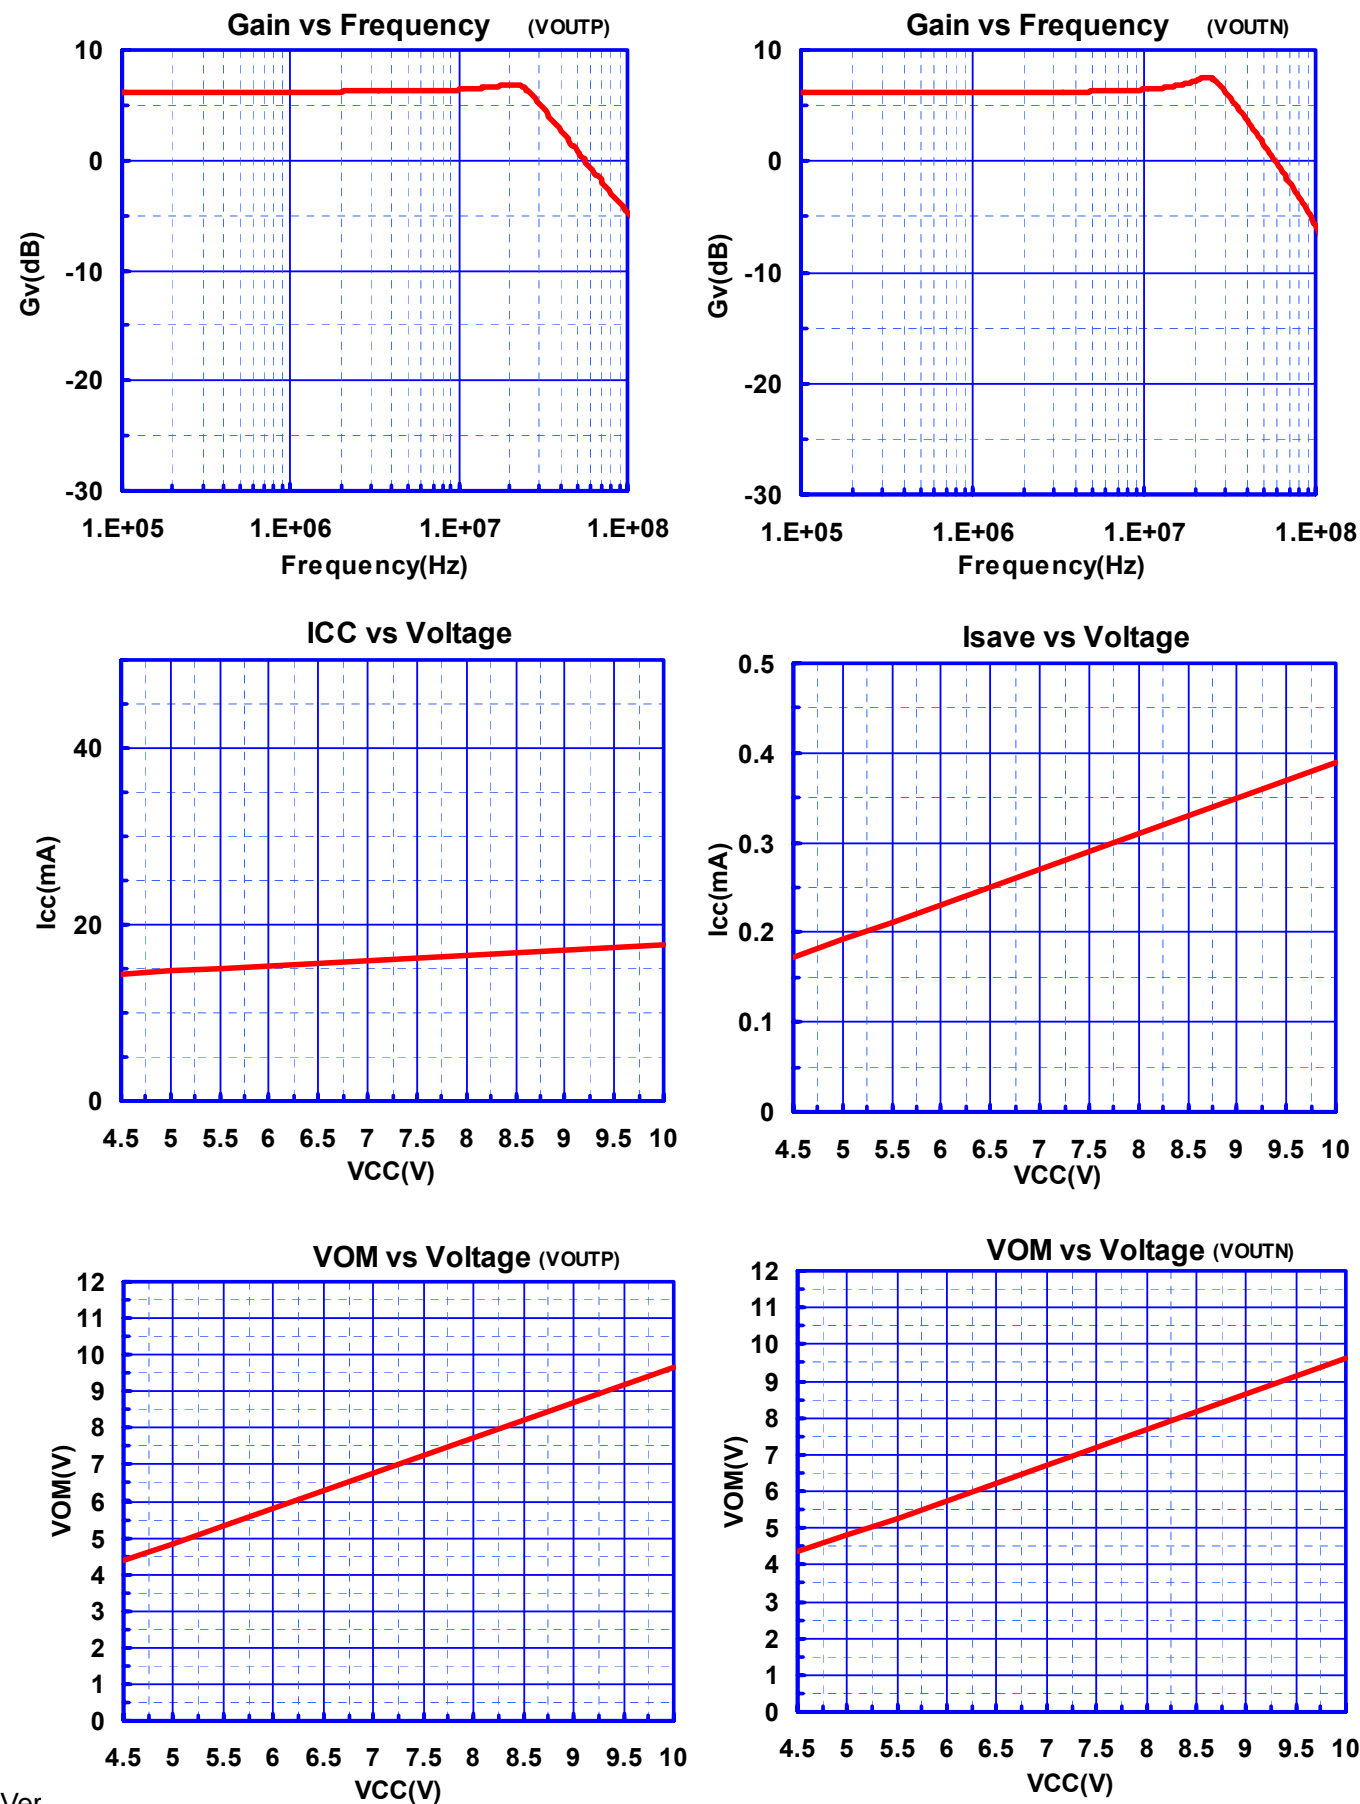







TYPICAL CHARACTERISTICS

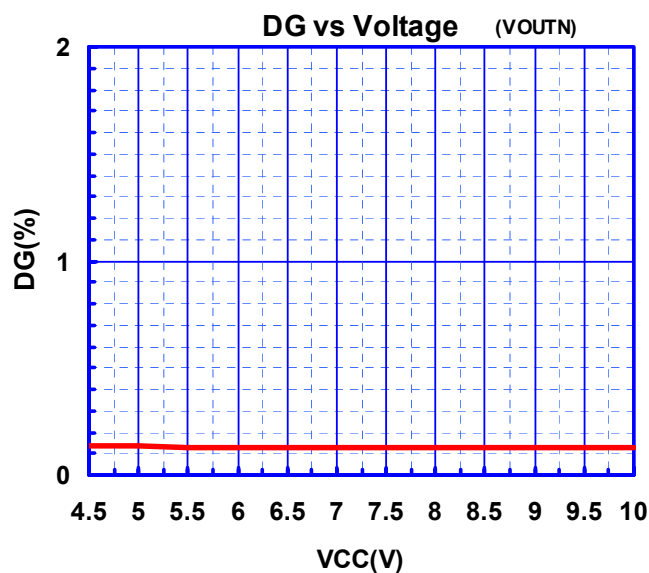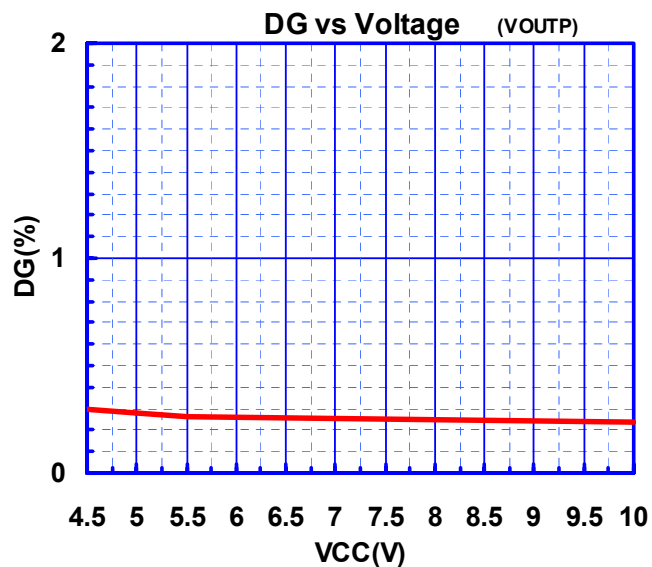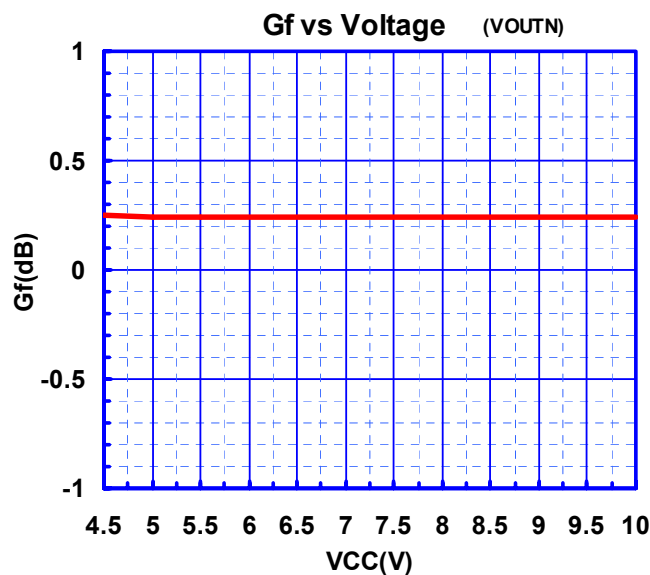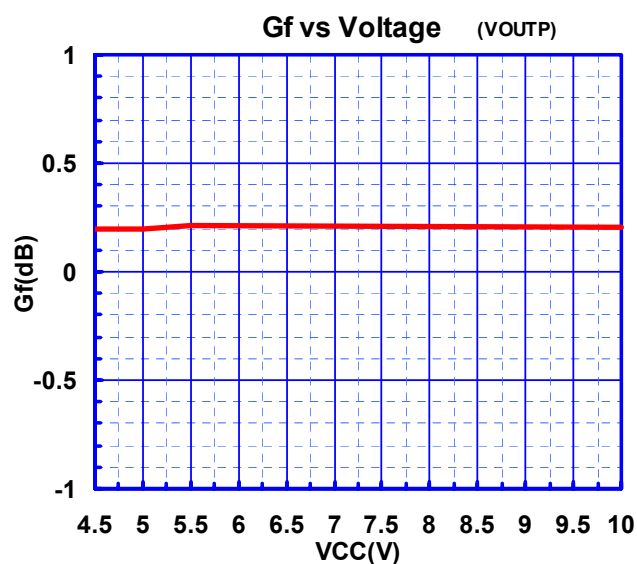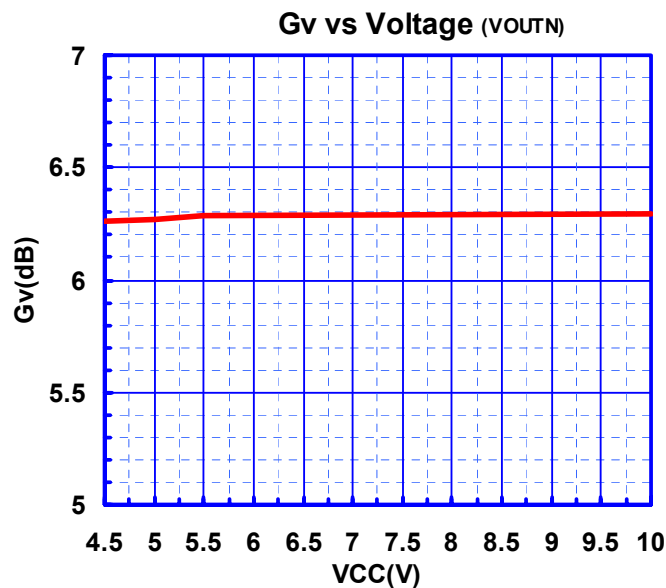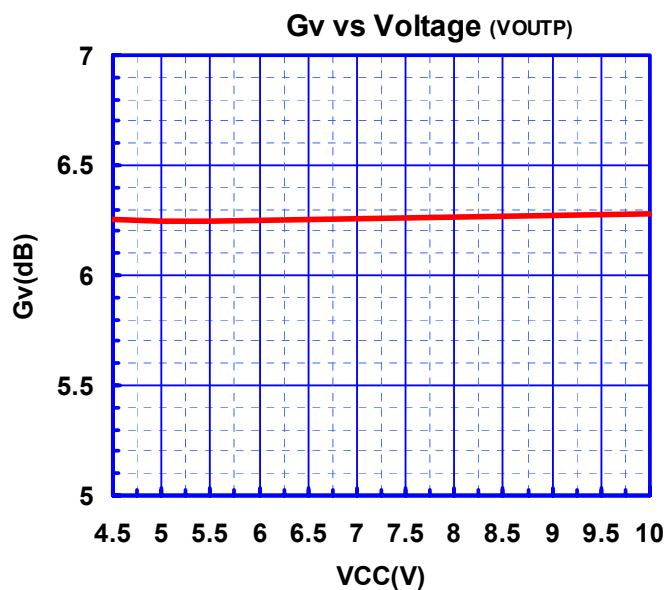







■TYPICAL CHARACTERISTICS

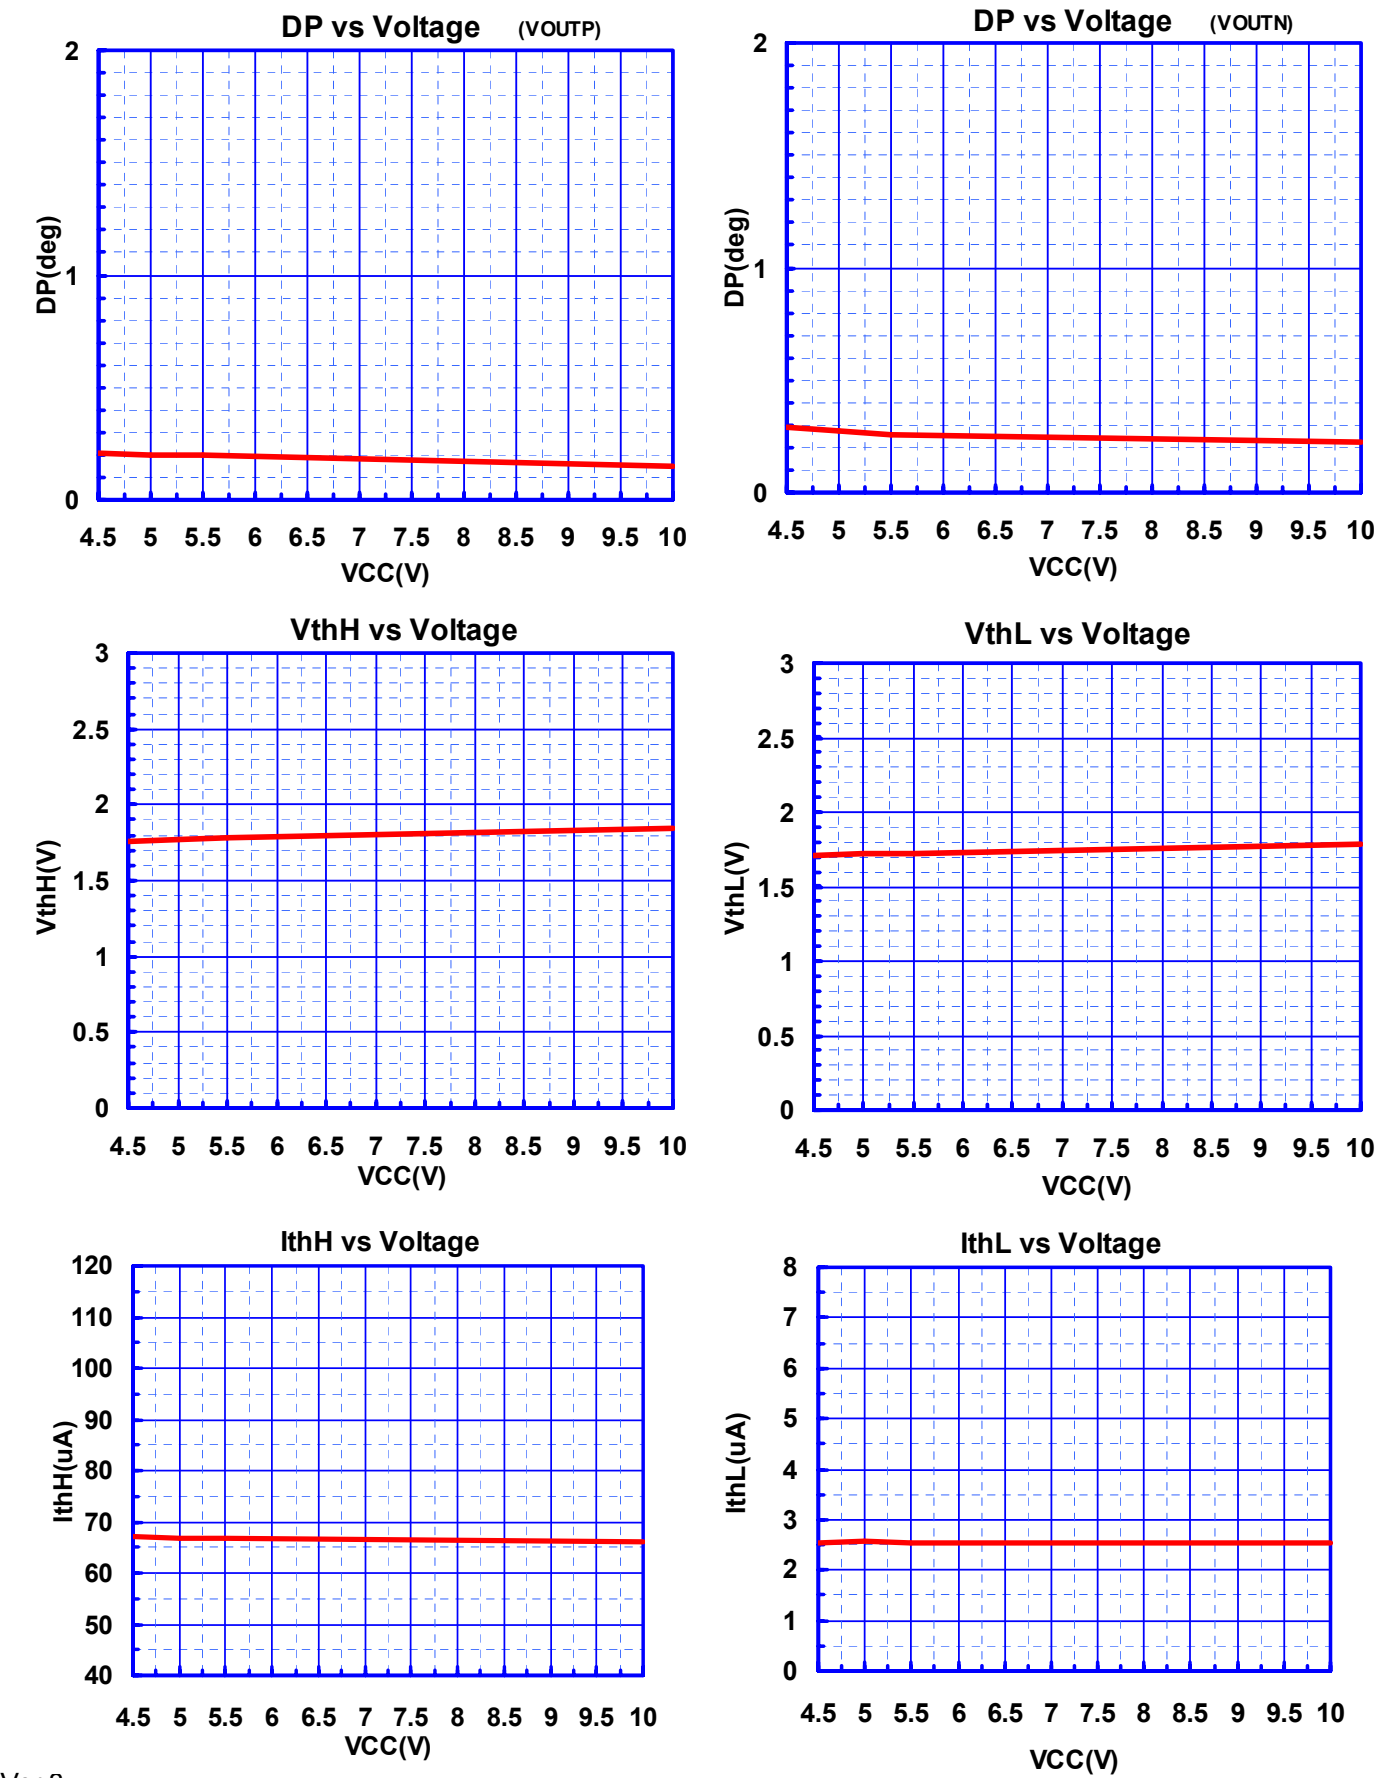





TYPICAL CHARACTERISTICS

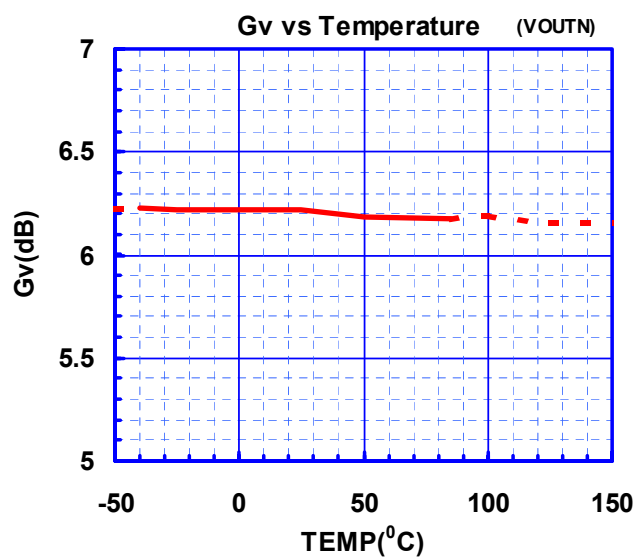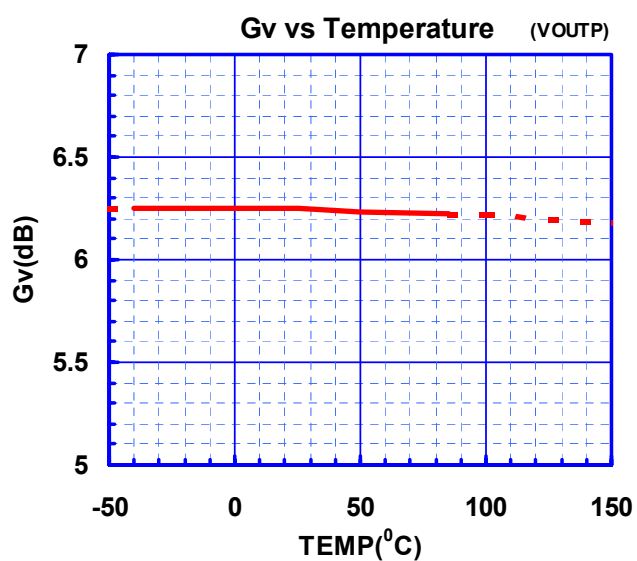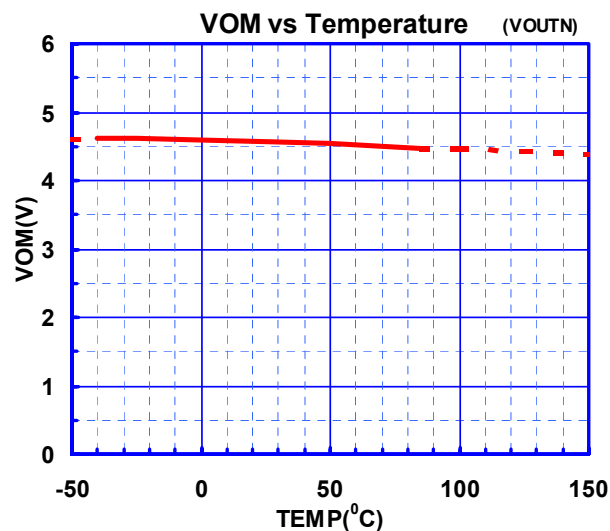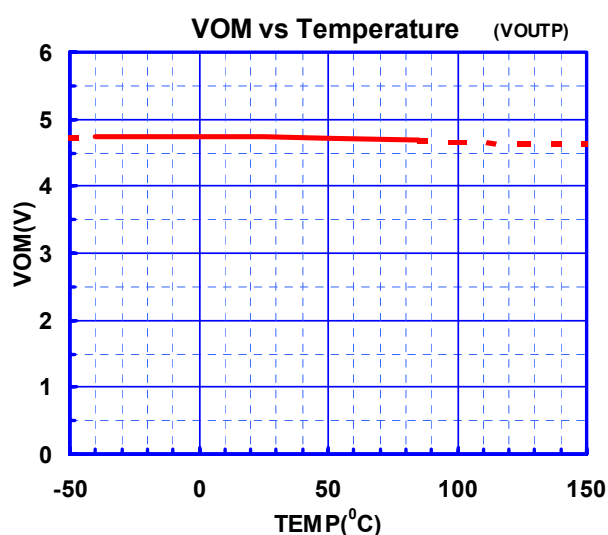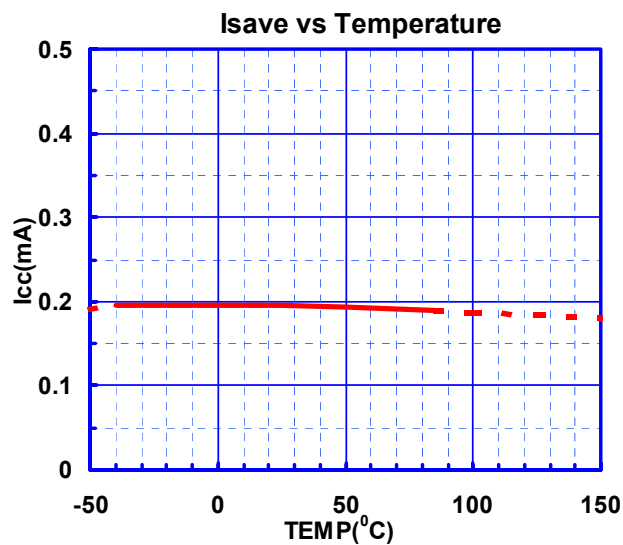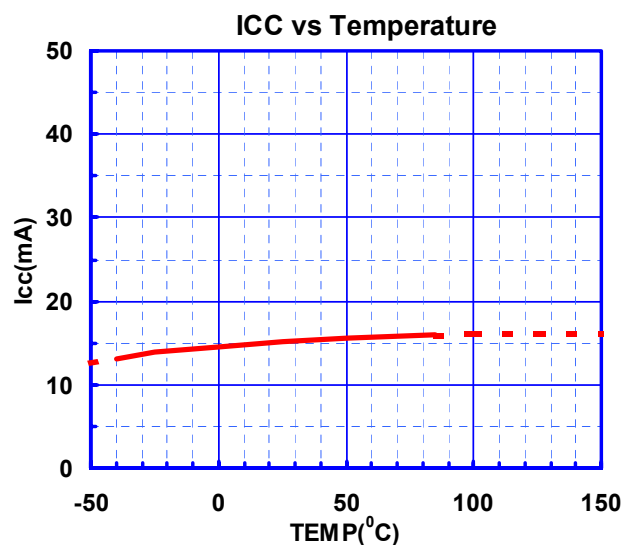

TYPICAL CHARACTERISTICS

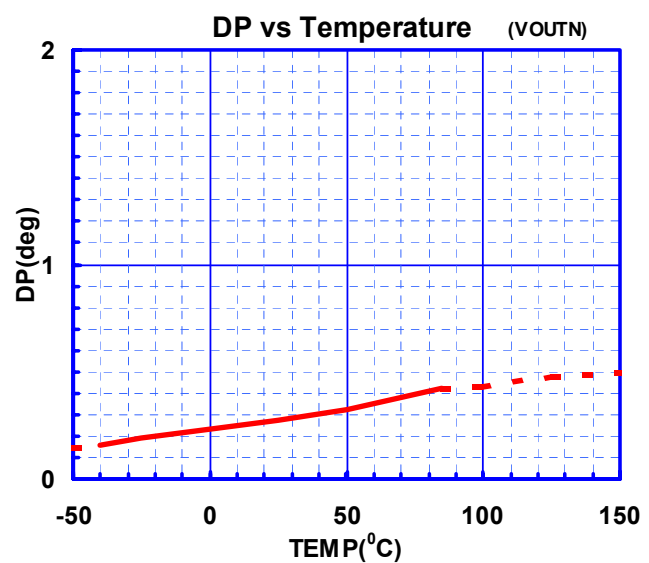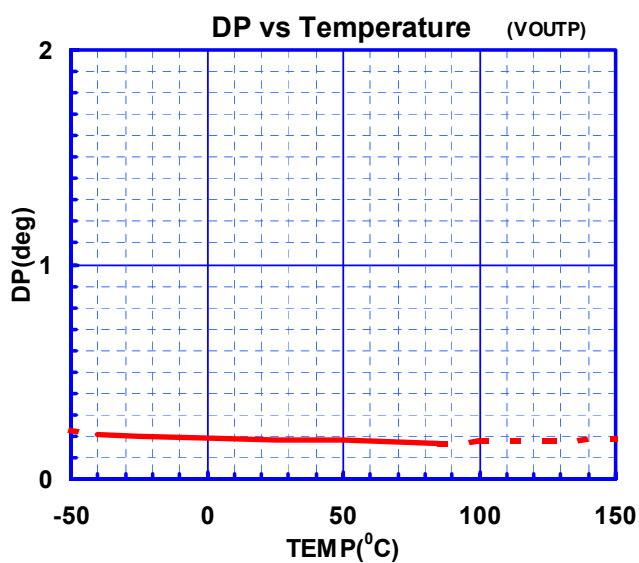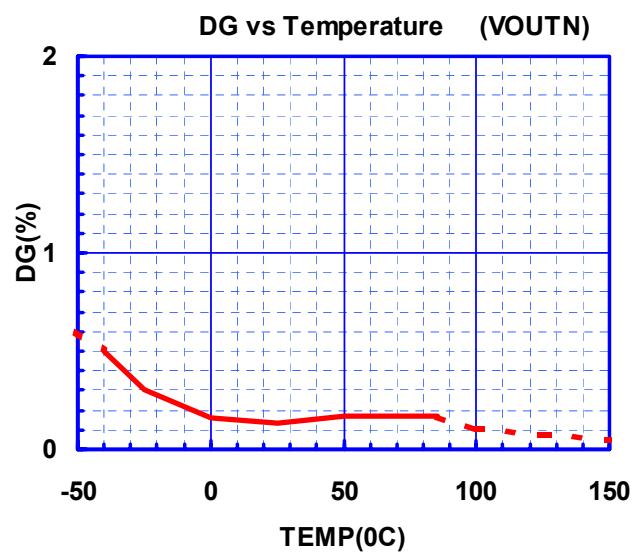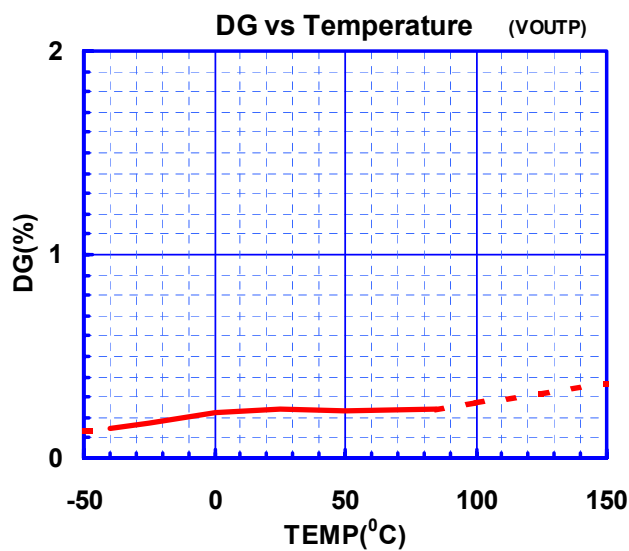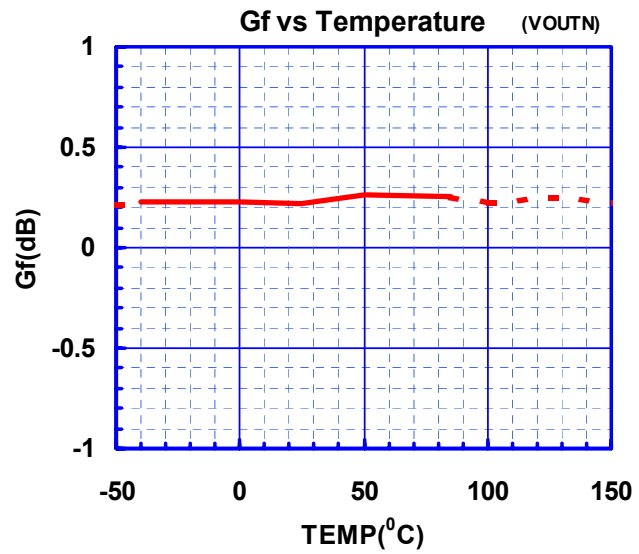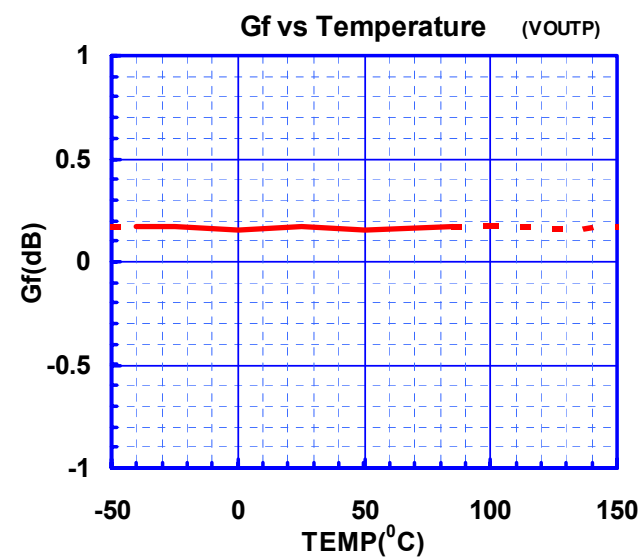

TYPICAL CHARACTERISTICS

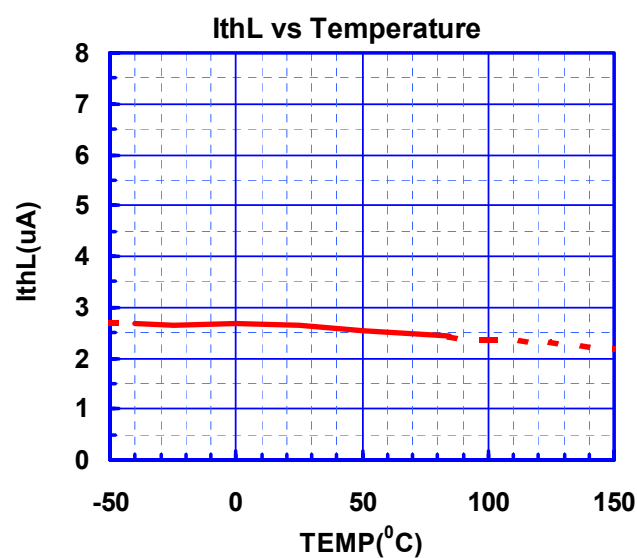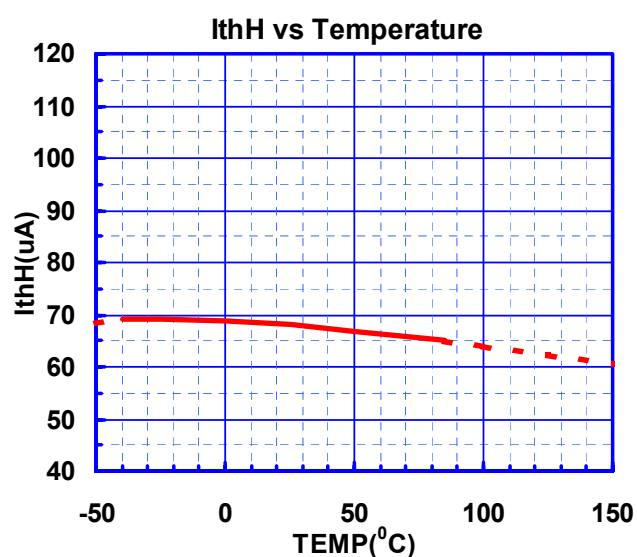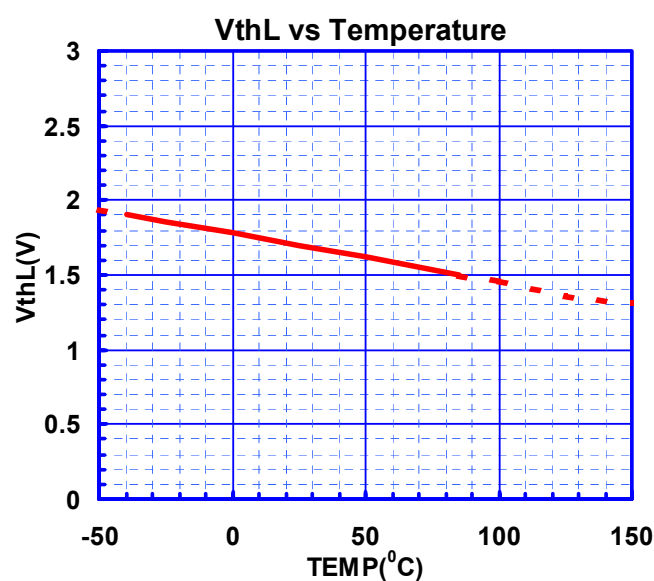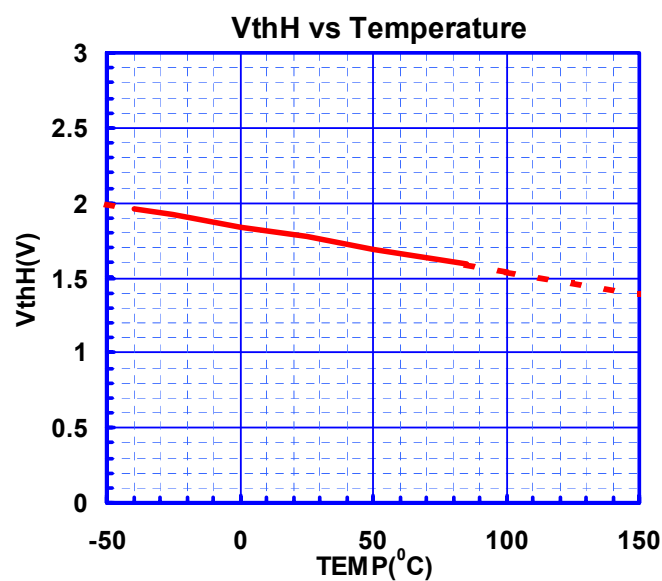

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.