

2Vrms Ground Referenced Stereo Line Amplifier with LPF


■GENERAL DESCRIPTION

The **NJU72011** is an audio line Amplifier .
 It can swing 2Vrms (5.6V peak-to-peak) signal at 3.3V operating voltage.
 Ground-referenced outputs eliminate output coupling capacitor. The pop noise suppression circuit removes a pop noise at the power-on and power-off.
 It is suitable for audio line interface of audio equipment which does not have over 9V regulator.

■PACKAGE OUTLINE



NJU72011RB2
MSOP10 (TVSP10)



NJU72011V
(SSOP14)

■APPLICATIONS

- Audio applications requiring 2Vrms outputs


■FEATURES

- Operating Voltage: +2.7 to +3.6V
- Operating Current: $I_{DD}=5\text{mA typ.}$
at $V^+=3.3\text{V}$, $R_L=47\text{k}\Omega$, No Signal
- Output Coupling Capacitor-less
- Pop Noise Suppression Circuit
- LPF
- C-MOS Technology
- Package Outline

MSOP10 (TVSP10)*
SSOP14


*MEET JEDEC MO-187-DA / THIN TYPE

■BLOCK DIAGRAM

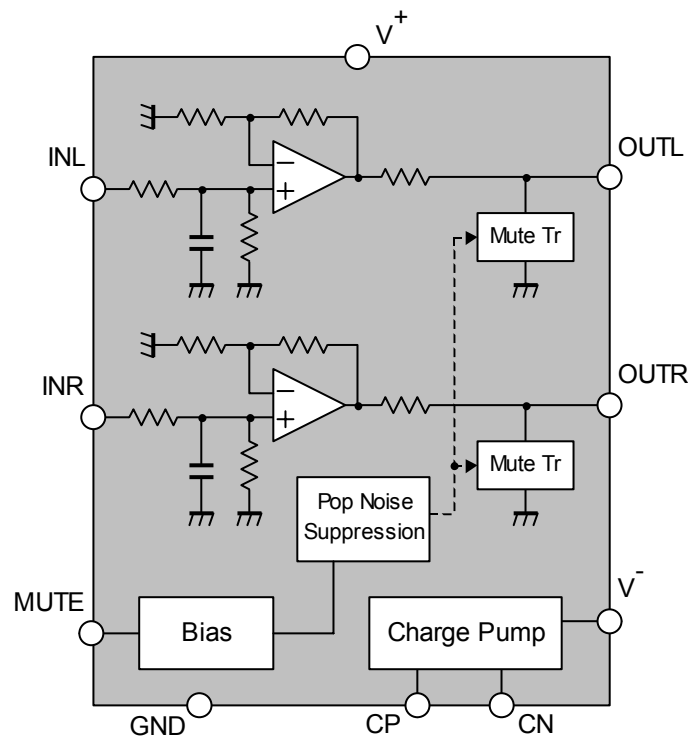


■PIN CONFIGURATION

MSOP10(TVSP10)



No.	Symbol	Function
1	INL	Lch Input
2	OUTL	Lch Output
3	V+	V+ Power Supply
4	CP	Flying Capacitor Positive Terminal
5	CN	Flying Capacitor Negative Terminal
6	V-	V- Power Supply
7	MUTE	Mute / Pop Noise Suppression
8	GND	Ground
9	OUTR	Rch Output
10	INR	Rch Input

SSOP14

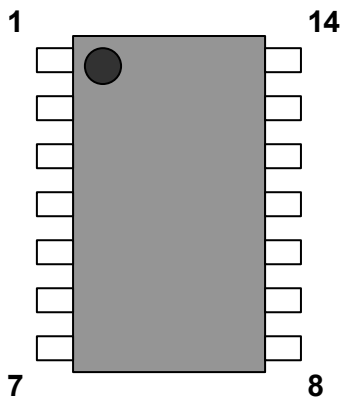

No.	Symbol	Function
1	NC	NC
2	INL	Lch Input
3	OUTL	Lch Output
4	V+	V+ Power Supply
5	CP	Flying Capacitor Positive Terminal
6	CN	Flying Capacitor Negative Terminal
7	NC	NC
8	NC	NC
9	V-	V- Power Supply
10	MUTE	Mute / Pop Noise Suppression
11	GND	Ground
12	OUTR	Rch Output
13	INR	Rch Input
14	NC	NC

■ABSOLUTE MAXIMUM RATING (Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V ⁺	+4	V
Power Dissipation	P _D	MSOP10(TVSP10) : 530 ^(Note1) SSOP14 : 550 ^(Note1)	mW
Maximum Input Voltage	V _{IMAX}	-V ⁺ -0.3 ~ V ⁺ +0.3	V
Operating Temperature Range	Topr	-40 ~ +85	°C
Storage Temperature Range	Tstg	-40 ~ +125	°C

(Note1) EIA/JEDEC STANDARD Test board (76.2x114.3x1.6mm, 2layer, FR-4) mounting

■RECOMMENDED OPERATING CONDITIONS

(Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V ⁺		2.7	3.3	3.6	V

■ELECTRICAL CHARACTERISTICS

(Ta=25°C, V⁺=3.3V, f=1kHz, Vin=0.7Vrms, Mute=OFF, R_L=47kΩ unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I _{DD}	No signal	-	5	10	mA
Output Gain	G _V		8	9	10	dB
Output Gain Error	ΔG _V		-0.5	0	0.5	dB
Maximum Output Voltage Level	V _{OMAX}	THD=1%	-	2.3	-	Vrms
Mute Level	V _{MUTE}	MUTE=ON, BW:400Hz-22kHz	-	-110	-	dB
Equivalent Input Noise Voltage	V _{NO}	Rg=0Ω, BW:400Hz-22kHz	-	-106	-	dB
Total Harmonic Distortion	THD	BW:400Hz-22kHz	-	0.003	-	%
Channel Separation	CS	Rg=600Ω	80	-	-	dB
Cut-off Frequency	f _C	2 nd order LPF	100	150	200	kHz
Output Offset Voltage	V _{OS}	Rg=0Ω	-	1	5	mV
Power Supply Rejection Ratio	PSRR	Vripple=1kHz / 100mVrms	-	45	-	dB
Output Impedance	R _{OUT}		-	300	-	Ω

■CONTROL CHARACTERISTICS


(Ta=25°C, V⁺=3.3V, R_L=47kΩ unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Mute terminal High	MuteH	Mute=OFF	0.8V ⁺	-	V ⁺	V
Mute terminal Low	MuteL	Mute=ON	0	-	0.2V ⁺	V


■ TEST CIRCUIT (I_{DD})

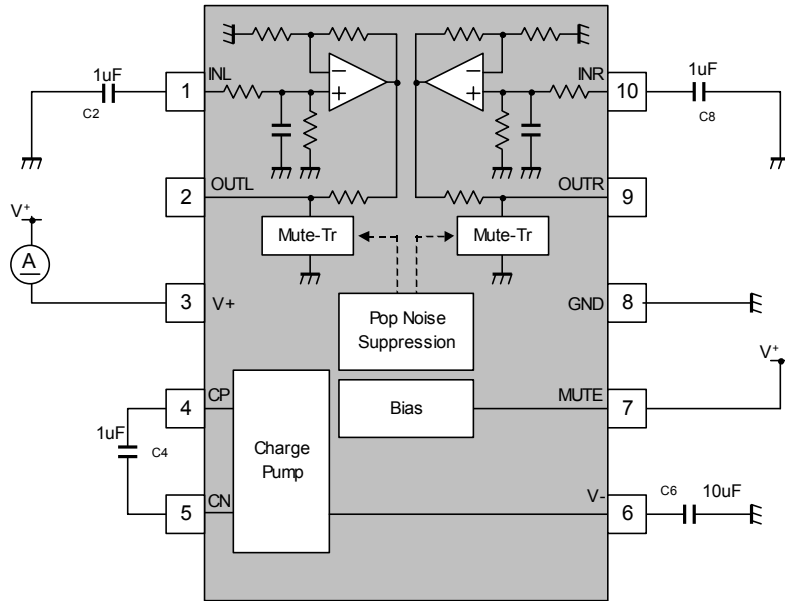

■ TEST CIRCUIT (G_V, V_{OMAX}, THD)

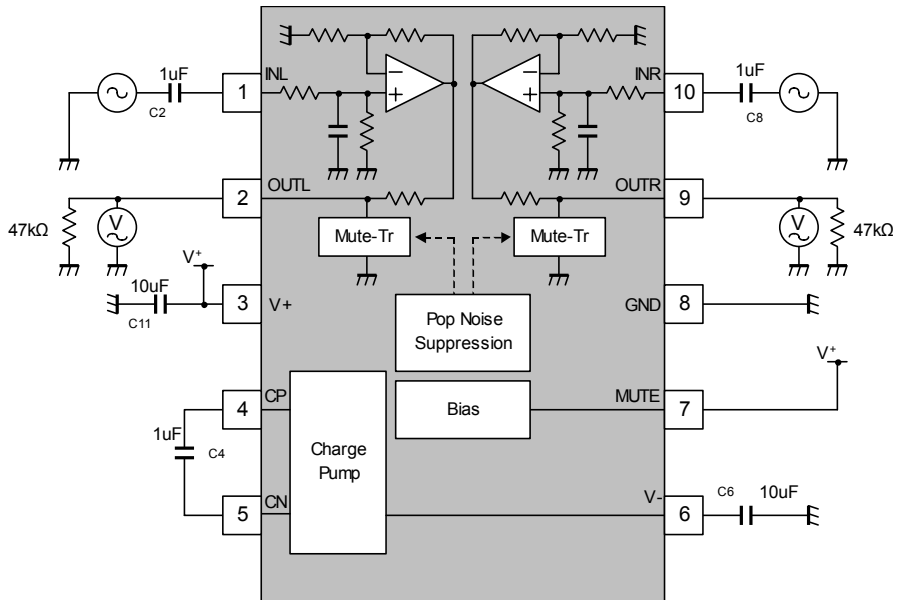

■TEST CIRCUIT (V_{MUTE})

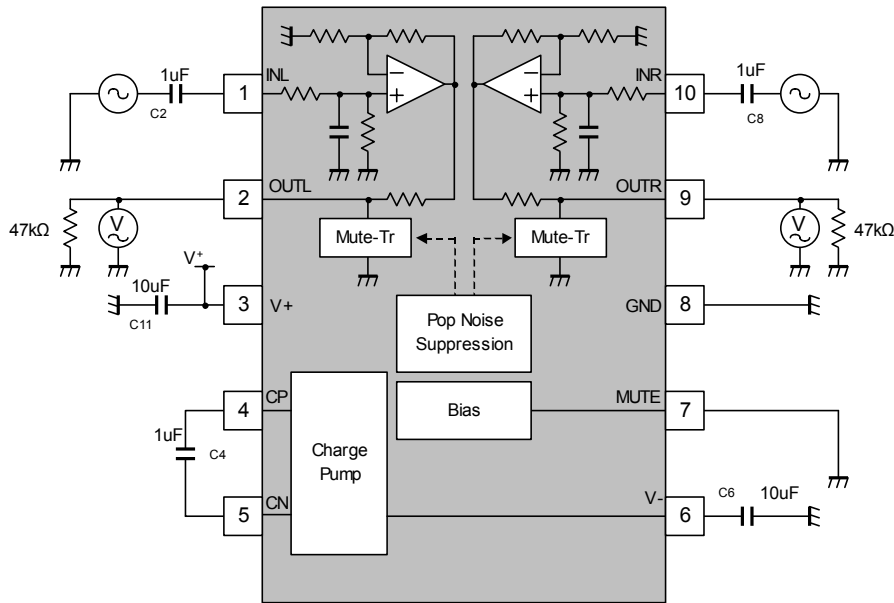

■TEST CIRCUIT (V_{NO}) $V_{NO}=(\text{measurement})-Gv1$

