


# Product Specification

## IAV204

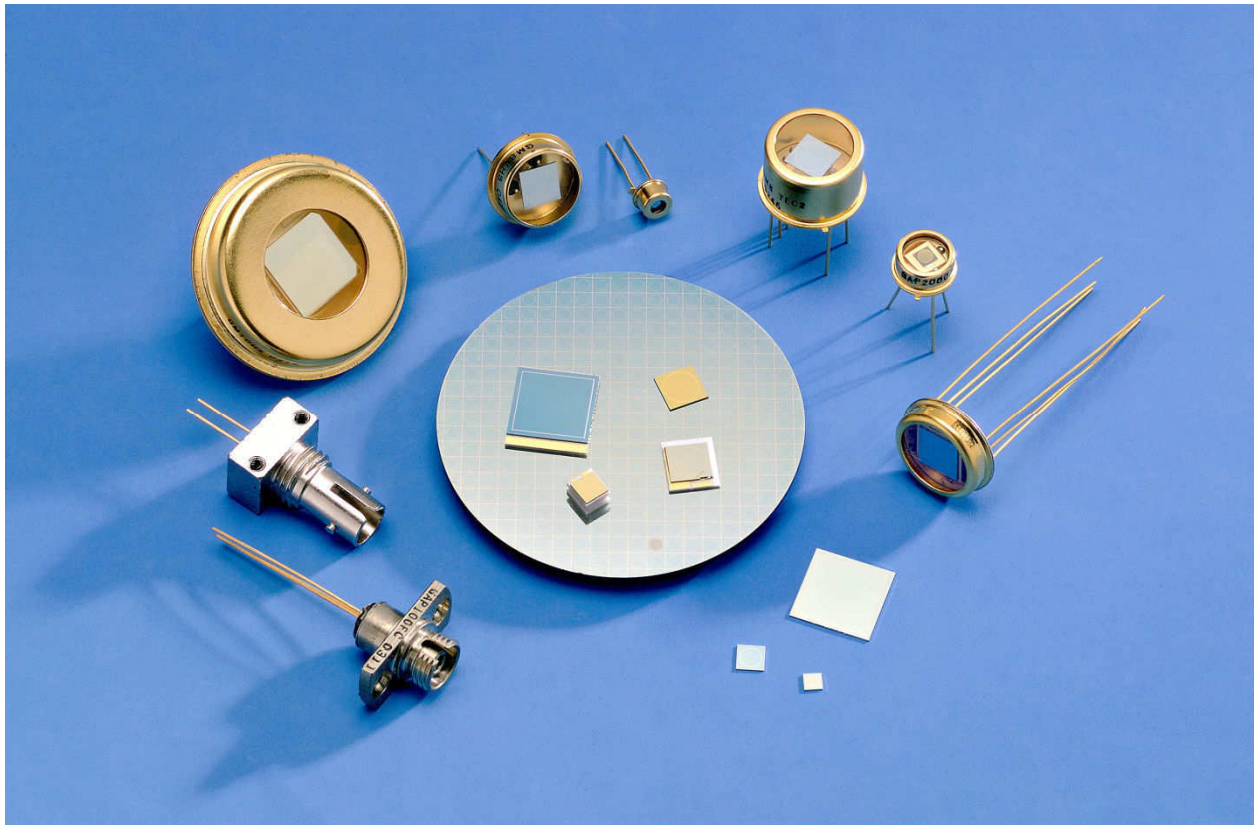

**GPD Optoelectronics Corp.**

7 Manor Parkway

Salem, NH 03079

Tel: +1 603 894 6865 Fax: +1 603 894 6866

[www.gpd-ir.com](http://www.gpd-ir.com) [sales@gpd-ir.com](mailto:sales@gpd-ir.com)

**GPD OPTOELECTRONICS CORP**  
**PRODUCT SPECIFICATIONS SHEET**

CUSTOMER: ANY	NO. IAV204
CITY:	TYPE: APD PHOTODIODE
CUST. DWG.	PKG. *T0-46 3 lead MAT InGaAs
DEVICE MARKING	
(a) G	
(b) IAV204	
(c) DC	

**GROUP A AND/OR PERFORMANCE CHARACTERISTICS**

NO.	PARAMETER CONDITIONS @ 23°C ± 2°C	MIN	TYP	MAX	UNITS
1	Wavelength Range	1000		1630	nm
2	Responsivity @ M = 1 1550 nm wavelength	0.85	0.90	0.95	A/W
3	Dark Current @ M=10		8	25	nA
4	Operating voltage, V <sub>r</sub> @ M=10	43	55	67	volts
5	Breakdown Voltage, V <sub>br</sub> (I <sub>d</sub> = 10 μA)	50	63	75	volts
6	Active Diameter	200	205	210	μm
7	Capacitance @ M=10		1.8	2.2	pF
8	Temperature coeff. of V <sub>br</sub> (23°C)		0.075	0.080	V/°C
9	Bandwidth @ M = 5	0.5	1.5	2.0	GHz
10	Bandwidth @ M = 10	1	1.5	2.0	GHz
11	Bandwidth @ M = 20	0.5	1.0	1.5	GHz
12	Excess Noise Factor, F @ M = 10		3.2	3.7	
13	Excess Noise Factor, F @ M = 20		5.5	6.0	
14	Noise Equivalent Power, NEP @ M = 10		0.032	0.1	pW/Hz <sup>1/2</sup>
15	<b><u>ABSOLUTE MAXIMUM CONDITIONS</u></b>				
16	Operating Temp Range	-40		70	°C
17	Storage Temp Range	-40		85	°C
18	Max Reverse Current			1	mA
19	Max Forward Current	0		10	mA
20	Optical Input (10 nsec pulse)			>200	kW/cm <sup>2</sup>
21	Optical Input (average)			0	dBm

**SPECIAL REQUIREMENTS**

\*TO-46 3 lead Modified Package Window Cap Outline Drawing# 13342 200 Micron Dia. Active Area  
 \*The following data is required for each unit. Breakdown Voltage @ 10μA, Operating Voltage and Dark Current for Gain=10,15and 20, Responsivity (X.XX A/W) @ M=1; 1550 nm. \*Test conditions @ 23°C ± 2°C RoHS Compliant

REVISION										APPROVED	
----------	--	--	--	--	--	--	--	--	--	----------	--


USER

REVDATE

FNAME

A-13342

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	ORIGINATE & RELEASE	1/18/10	
	B	E.C.N.#2320	2/1/10	

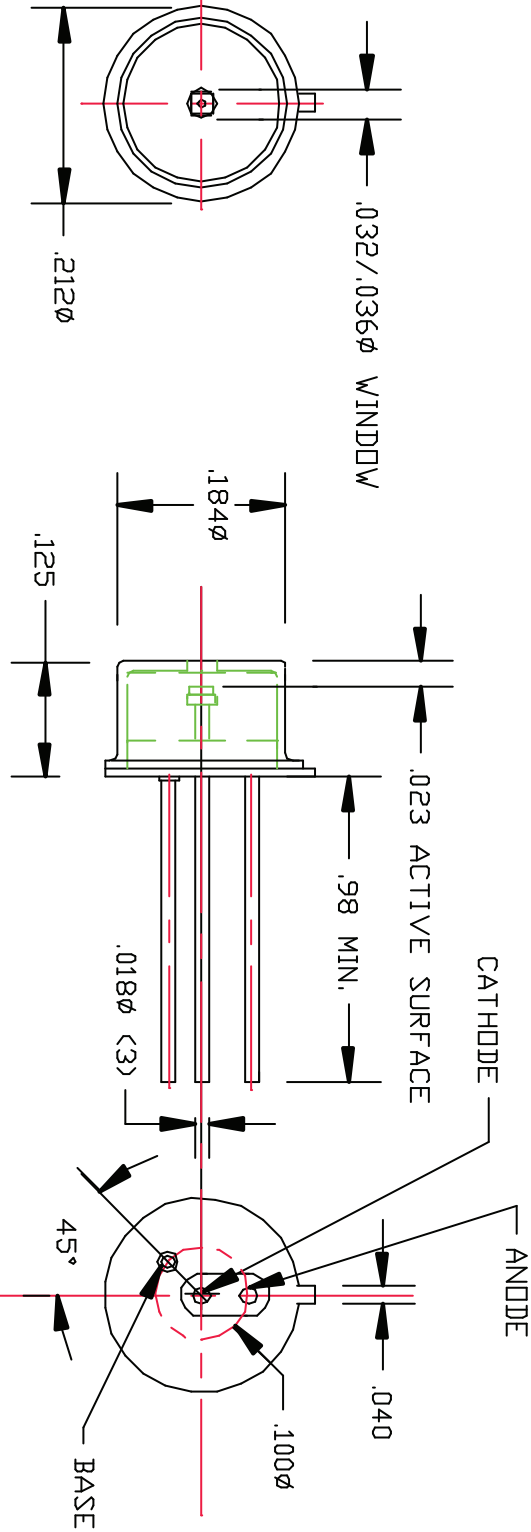

APPROVALS

TOLERANCES

GPD OPTOELECTRONICS CORP.  
7 MANOR PARKWAY, SALEM, NH. 03079-2842

OUTLINE IAV204

USED ON	BY	DATE
DRFT.	C.M.W.	1/18/10
CHK.		
ENG.		
PRDC.		

ALL DIMS. ARE IN INCHES  
 XX PLACE DEC.±.010  
 XXX PLACE DEC.±.005  
 FRACTIONS±1/64  
 ANGLES±0.5°

FINISH:

SIZE	FSCM NO.	DWG NO.	REV
A	53399	13342	B

SCALE 5:1

SHEET 1 OF 1

MARK