

5A Avg.

600 Volts


FRED

TSF05B60-11A

■最大定格 Maximum Ratings

| Item | Symbol | Conditions | Unit |
|--|------------|--|------|
| くり返しピーク逆電圧 Repetitive Peak Reverse Voltage | V_{RRM} | 600 | V |
| 平均整流電流 Average Rectified Forward Current | I_O | 50Hz、正弦半波通電抵抗負荷 50Hz Half Sine Wave Resistive Load | 5 A |
| 実効順電流 R.M.S. Forward Current | $I_F(RMS)$ | 7.85 | A |
| サーージ順電流 Surge Forward Current | I_{FSM} | 80 50Hz正弦半波、1サイクル、非くり返し 50Hz Half Sine Wave, 1cycle, Non-repetitive | A |
| 動作接合温度範囲 Operating Junction Temperature Range | T_{jw} | -40~+150 | °C |
| 保存温度範囲 Storage Temperature Range | T_{stg} | -40~+150 | °C |

■OUTLINE DRAWING(mm)

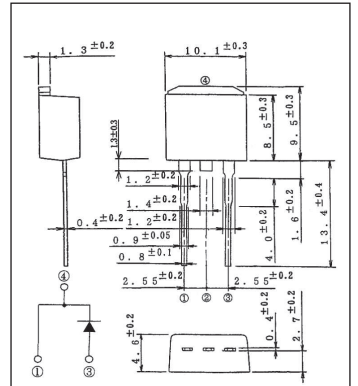

■APPROX. NET WEIGHT:1.4g

■電気的特性 ELECTRICAL CHARACTERISTICS

| Item | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------|---------------|---|------|------|------|---------------|
| ピーク逆電流 Peak Reverse Current | I_{RM} | $T_j=25^\circ\text{C}$, $V_{RM}=V_{RRM}$ | — | — | 30 | μA |
| ピーク順電圧 Peak Forward Voltage | V_{FM} | $T_j=25^\circ\text{C}$, $I_{FM}=5\text{A}$ | — | — | 1.7 | V |
| 逆回復時間 Reverse Recovery Time | t_{rr} | $I_{FM}=5\text{A}$, $-di/dt=50\text{A}/\mu\text{s}$, $T_j=25^\circ\text{C}$ | — | — | 40 | ns |
| 熱抵抗 Thermal Resistance | $R_{th(j-c)}$ | 接合部・ケース間 Junction to Case | — | — | 5 | °C/W |

■定格・特性曲線

