

### OVERVIEW

The SM6611 series are temperature switch ICs that change state (invert) when the chip temperature exceeds a preset temperature. The switches are designed with temperature hysteresis to prevent unstable output when the temperature is in the vicinity of the preset temperature. There are 6 output switching temperatures in the series, available in 2 output configurations, making the SM6611 series devices ideal for a wide range of applications.

### FEATURES


- 2.4 to 10.0V operating supply voltage
- -40 to 100°C operating temperature range
- $\pm 3^\circ\text{C}$  temperature accuracy
- 45 to 95°C output switch temperatures in 10°C steps
- 10°C temperature hysteresis
- 30 $\mu\text{A}$  (typ) low current consumption
- Output configuration
  - SM6611 $\times$ AH open-drain active-LOW output
  - SM6611 $\times$ BH CMOS active-HIGH output
- 6-pin SOT23-6W package

### APPLICATIONS

- Motherboard overheating protection
- Battery-pack temperature protection


### PINOUT

(Top view)

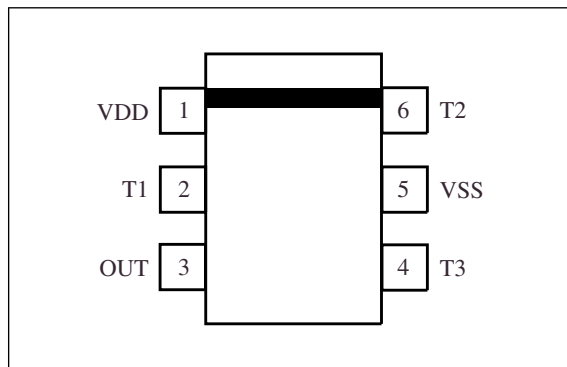

### PACKAGE DIMENSIONS

(Unit: mm)

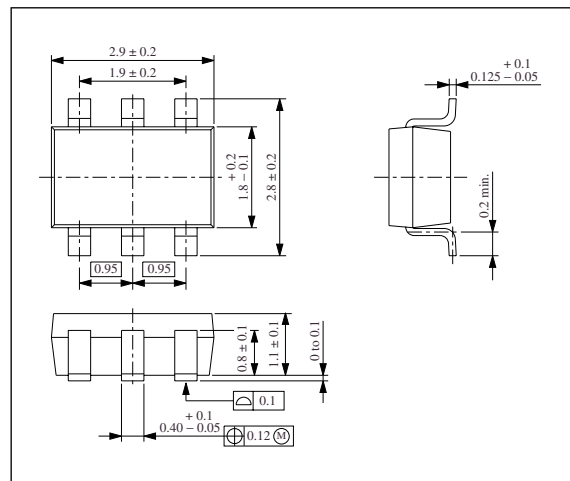

### ORDERING INFORMATION

#### SM6611 $\times$ AH series


Device	Output switch temperature	Output configuration
SM6611AAH <sup>*1</sup>	45°C	Open-drain active-LOW output
SM6611BAH <sup>*1</sup>	55°C	
SM6611CAH <sup>*1</sup>	65°C	
SM6611DAH <sup>*1</sup>	75°C	
SM6611EAH	85°C	
SM6611FAH <sup>*1</sup>	95°C	

#### SM6611 $\times$ BH series

Device	Output switch temperature	Output configuration
SM6611ABH	45°C	CMOS active-HIGH output
SM6611BBH	55°C	
SM6611CBH	65°C	
SM6611DBH	75°C	
SM6611EBH	85°C	
SM6611FBH	95°C	

\*1. These versions are produced after receiving a purchase order. Please ask our Sales & Marketing section for further details.

## BLOCK DIAGRAM

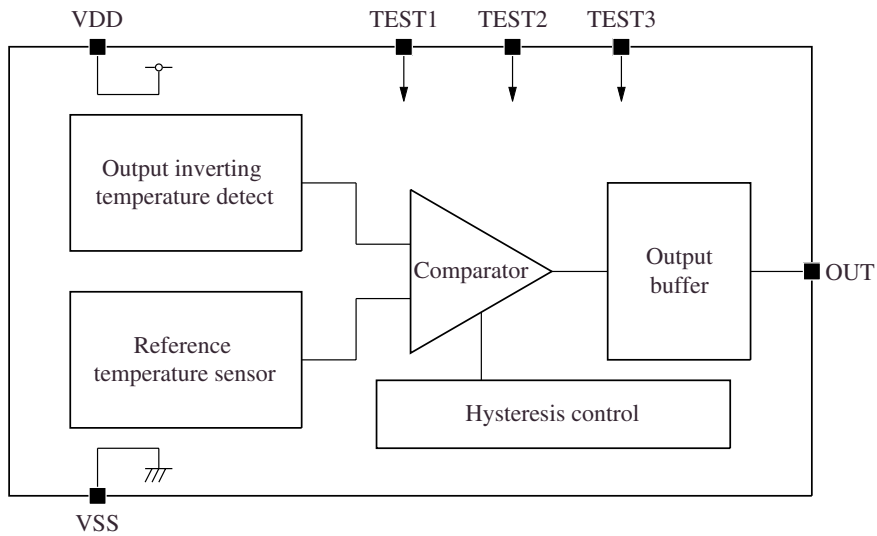

## PIN DESCRIPTION

Number	Name	I/O	Description
1	VDD	-	Supply voltage
2	T1	-	Test pin 1. This pin is used for test purposes by NPC. It has a built-in pull-up resistor. Leave open for normal operation.
3	OUT	O	Output. SM6611×AH: Open-drain output. A pull-up resistor of 100kΩ should be connected to this pin. Goes LOW when the switch preset temperature is exceeded. SM6611×BH: CMOS output. Goes LOW to HIGH when the switch preset temperature is exceeded.
4	T3	-	Test pin 3. This pin is used for test purposes by NPC. Connect to VSS for normal operation.
5	VSS	-	Ground
6	T2	-	Test pin 3. This pin is used for test purposes by NPC. Connect to VSS for normal operation.

## SPECIFICATIONS

### Absolute Maximum Ratings

$$V_{SS} = 0V$$

Parameter	Symbol	Rating	Unit
Supply voltage range	$V_{DD}$	-0.3 to 15	V
Power dissipation	$P_D$	10	mW
Storage temperature range	$T_{STG}$	-55 to 125	°C

### Recommended Operating Conditions

$$V_{SS} = 0V$$

Parameter	Symbol	Rating	Unit
Supply voltage range	$V_{DD}$	2.4 to 10	V
Operating temperature range	$T_{OPR}$	-40 to 100	°C

### DC Characteristics

$V_{DD} = 2.4$  to  $10V$ ,  $V_{SS} = 0V$ ,  $T_a = -40$  to  $100^\circ C$  unless otherwise noted.

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
Supply voltage	$V_{DD}$		2.4	-	10	V
Current consumption	$I_{DD}$		-	30	100	$\mu A$
LOW-level output voltage	$V_{OL}$	$I_{SINK} = 1mA, V_{DD} > 2.4V$	-	-	0.3	V
		$I_{SINK} = 3mA, V_{DD} > 4V$	-	-	0.4	V
HIGH-level output voltage	$V_{OH}$	CMOS output (SM6611×BH), $I_{SOURCE} = 0.5mA, V_{DD} > 2.4V$	$V_{DD} - 1.0$	-	-	V
Open-drain output maximum voltage	$V_{OMAX}$	Open-drain output (SM6611×AH)	-	-	10	V
Open-drain output leakage current	$I_{LEAK}$	$V_{DD} = 2.4V, V_{OUT} = 10V, (SM6611×AH)$	-1	-	+1	$\mu A$
Output switch temperature accuracy	$\Delta T_{TH}$	45 to 95°C	-3	-	+3	°C
Hysteresis temperature	$T_{HYST}$		-	10	-	°C

Please pay your attention to the following points at time of using the products shown in this document.

The products shown in this document (hereinafter "Products") are not intended to be used for the apparatus that exerts harmful influence on human lives due to the defects, failure or malfunction of the Products. Customers are requested to obtain prior written agreement for such use from SEIKO NPC CORPORATION (hereinafter "NPC"). Customers shall be solely responsible for, and indemnify and hold NPC free and harmless from, any and all claims, damages, losses, expenses or lawsuits, due to such use without such agreement. NPC reserves the right to change the specifications of the Products in order to improve the characteristic or reliability thereof. NPC makes no claim or warranty that the contents described in this document dose not infringe any intellectual property right or other similar right owned by third parties. Therefore, NPC shall not be responsible for such problems, even if the use is in accordance with the descriptions provided in this document. Any descriptions including applications, circuits, and the parameters of the Products in this document are for reference to use the Products, and shall not be guaranteed free from defect, inapplicability to the design for the mass-production products without further testing or modification. Customers are requested not to export or re-export, directly or indirectly, the Products to any country or any entity not in compliance with or in violation of the national export administration laws, treaties, orders and regulations. Customers are requested appropriately take steps to obtain required permissions or approvals from appropriate government agencies.

The logo for NPC (Seiko NPC Corporation) consists of the letters 'NPC' in a bold, black, sans-serif font. The 'N' and 'P' are connected at the top, and the 'C' is positioned to the right of the 'P'.

**SEIKO NPC CORPORATION**

1-9-9, Hatchobori, Chuo-ku,  
Tokyo 104-0032, Japan  
Telephone: +81-3-5541-6501  
Facsimile: +81-3-5541-6510  
<http://www.npc.co.jp/>  
Email: [sales@npc.co.jp](mailto:sales@npc.co.jp)

NC0022DE 2007.10