

Features

- ▶ Supply voltage range 8.5V to 25V
- ▶ Two independent operating channels
- ▶ Device parameters comply with PSI5-P10P-500/3L (PSI5 spec 1.3)
- ▶ Applicable for parallel and universal mode (standard) as well as daisy chain mode (increased)
- ▶ Channel output short circuit protected against 40V and GND
- ▶ Channel output short circuit protected against every other channel
- ▶ Adapted quiescent current threshold
- ▶ Data Manchester coded
- ▶ SPI interface
- ▶ Over current switch off for every channel
- ▶ Overtemperature switch off for every channel
- ▶ Operating temperature range -40°C to +125°C
- ▶ QFN 5x5 20ld package


General Description

The E981.07 manages the connection and communication between a microcontroller unit (MCU) and up to six sensor satellites. It can be applied for example in a vehicle passenger restraint system. The device provides two independently operating channels. Every channel manages the communication with a maximum of three sensor satellites.

Each channel supplies the sensor devices connected with a regulated DC voltage, which is derived from an external source. Sensor data are extracted by measuring the current, modulated by the connected sensor devices and provided to the MCU via SPI interface. The current threshold is adapted to the quiescent current of the system. The data bits are coded using a Manchester format. The device operates with an external 4MHz/8MHz clock.

Applications

- ▶ Passenger restraint systems

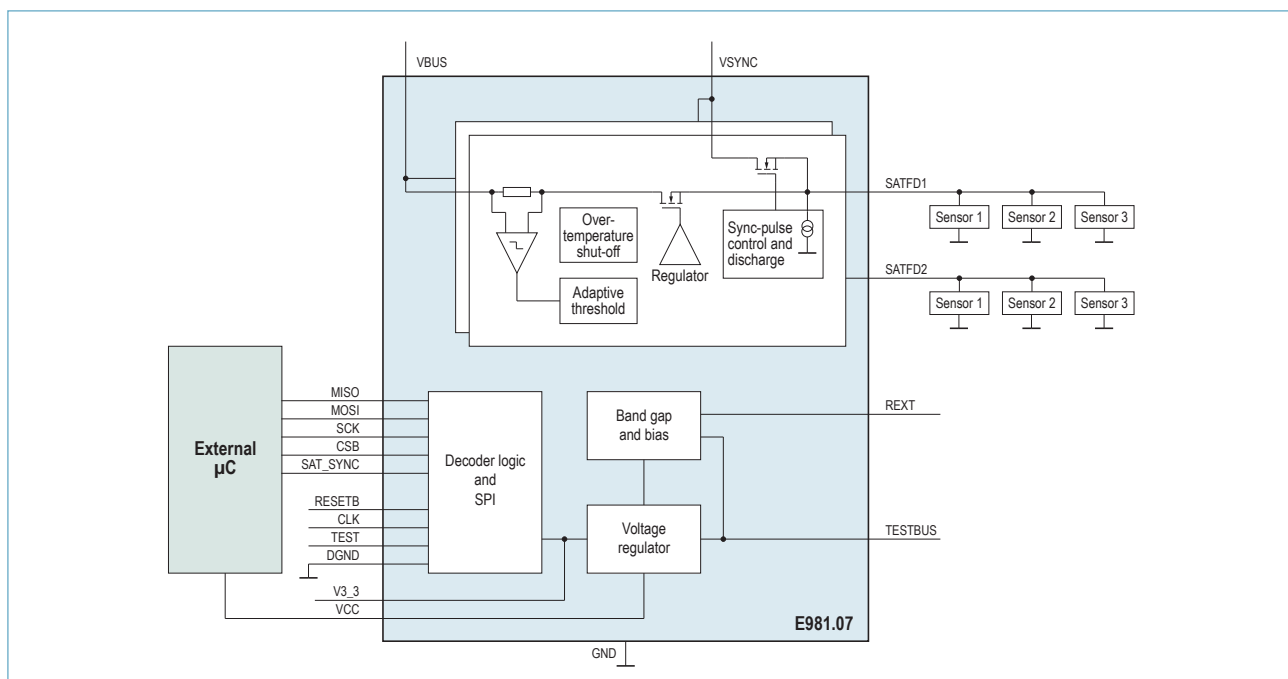

ELMOS Semiconductor AG – Headquarters
Heinrich-Hertz-Str. 1 | 44227 Dortmund | Germany
Phone +49 (0) 231-75 49-100 | Fax +49 (0) 231-75 49-149
sales@elmos.de | www.elmos.de

***Note** ELMOS Semiconductor AG (below ELMOS) reserves the right to make changes to the product contained in this publication without notice. ELMOS assumes no responsibility for the use of any circuits described herein, conveys no licence under any patent or other right, and makes no representation that the circuits are free of patent infringement. While the information in this publication has been checked, no responsibility, however, is assumed for inaccuracies. ELMOS does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of a life-support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications.*

***Copyright** © 2009 ELMOS Reproduction, in part or whole, without the prior written consent of ELMOS, is prohibited.*