



GaN-HEMT 30W

EGN21C030MK

High Voltage - High Power GaN-HEMT


FEATURES

- High Voltage Operation : $V_{DS}=50V$
- High Power : 45.0dBm (typ.) @ P_{sat}
- Power Gain : 19dB(typ.) @ $f=2.14GHz$
- Proven Reliability

DESCRIPTION

SEDI's GaN-HEMT offers high efficiency, ease of matching, greater consistency and broad bandwidth for high power L-band amplifiers with 50V operation, and gives you higher gain.

This new product is ideally suited for use in 2.1GHz W-CDMA design requirements as it offers high gain, long term reliability and ease of use.



ABSOLUTE MAXIMUM RATINGS (Case Temperature $T_c=25^{\circ}C$)

| Item | Symbol | Condition | Rating | Unit |
|-------------------------|-----------|--------------|-------------|-------------|
| Operating-Voltage | V_{DS} | | 55 | V |
| Drain-Source Voltage | V_{DS} | $V_{GS}=-8V$ | 160 | V |
| Gate-Source Voltage | V_{GS} | | -15 | V |
| Total Power Dissipation | P_t | | 37.5 | W |
| Storage Temperature | T_{stg} | | -65 to +175 | $^{\circ}C$ |
| Channel Temperature | T_{ch} | | 250 | $^{\circ}C$ |

RECOMMENDED OPERATING CONDITION

| Item | Symbol | Condition | Limit | Unit |
|----------------------|------------|----------------|-------------|-------------|
| DC Input Voltage | V_{DS} | | ≤ 55 | V |
| Forward Gate Current | I_{GF} | $R_G=15\Omega$ | ≤ 69 | mA |
| Reverse Gate Current | I_{GR} | $R_G=15\Omega$ | ≥ -1.1 | mA |
| Channel Temperature | T_{ch} | | ≤ 180 | $^{\circ}C$ |
| Average Output Power | $P_{ave.}$ | | ≤ 42.0 | dBm |

ELECTRICAL CHARACTERISTICS (Case Temperature $T_c=25^{\circ}C$)

| Item | Symbol | Condition | Limit | | | Unit |
|--------------------|--------------|------------------------------------|-------|------|------|---------------|
| | | | min. | Typ. | Max. | |
| Pinch-Off Voltage | V_p | $V_{DS}=50V$ $I_{DS}=7.8mA$ | -1.0 | -1.5 | -2.0 | V |
| Saturated Power | $P_{sat} *1$ | $V_{DS}=50V$ | 44.0 | 45.0 | - | dBm |
| Drain Efficiency | $\eta_d *2$ | $I_{DS}(DC)=150mA$ | 10.5 | 12.5 | - | % |
| Power Gain | $G_p *2$ | $f=2.14GHz$ | 18.0 | 19.0 | - | dB |
| Thermal Resistance | R_{th} | Channel to Case at 24W P_{DC} | - | 5.0 | 6.0 | $^{\circ}C/W$ |

*1 : 10%-duty RF pulse (DC supply constant)

*2 : $P_{out} = 31.5dBm$, CW




GaN-HEMT 30W

EGN21C030MK


RF characteristics @f=2.14GHz fine tuned

High Voltage - High Power GaN-HEMT

Output Power vs. Frequency
V_{DS}=50V, I_{DS(DC)}=150mA

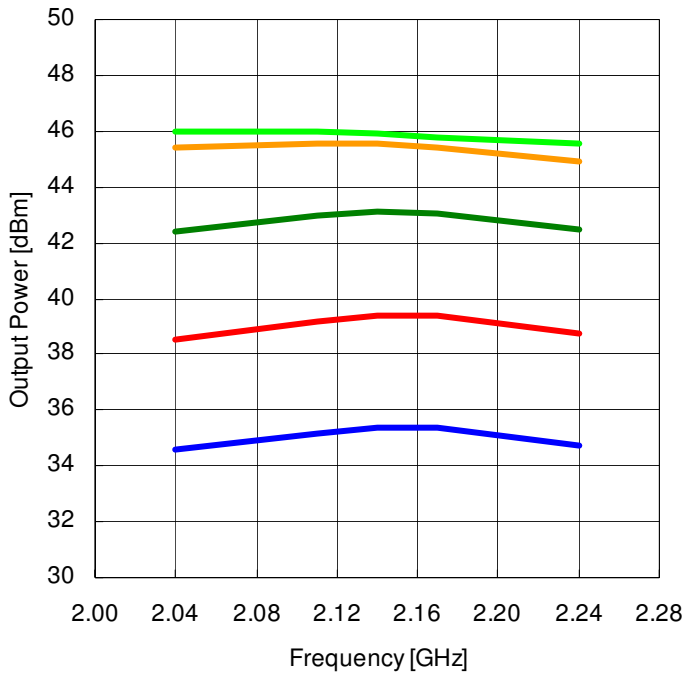


Output Power and Drain Efficiency vs. Input Power
V_{DS}=50V, I_{DS(DC)}=150mA, f=2.14GHz

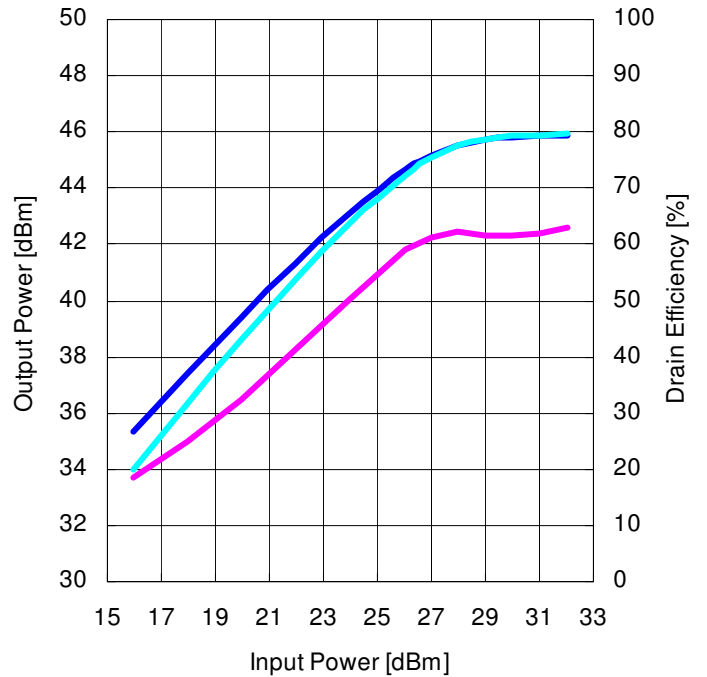

Pin=16dBm Pin=20dBm Pin=24dBm
Pin=28dBm Pin=32dBm

Pout (class AB) Pout (class B) Nd (class B)

Test Fixture

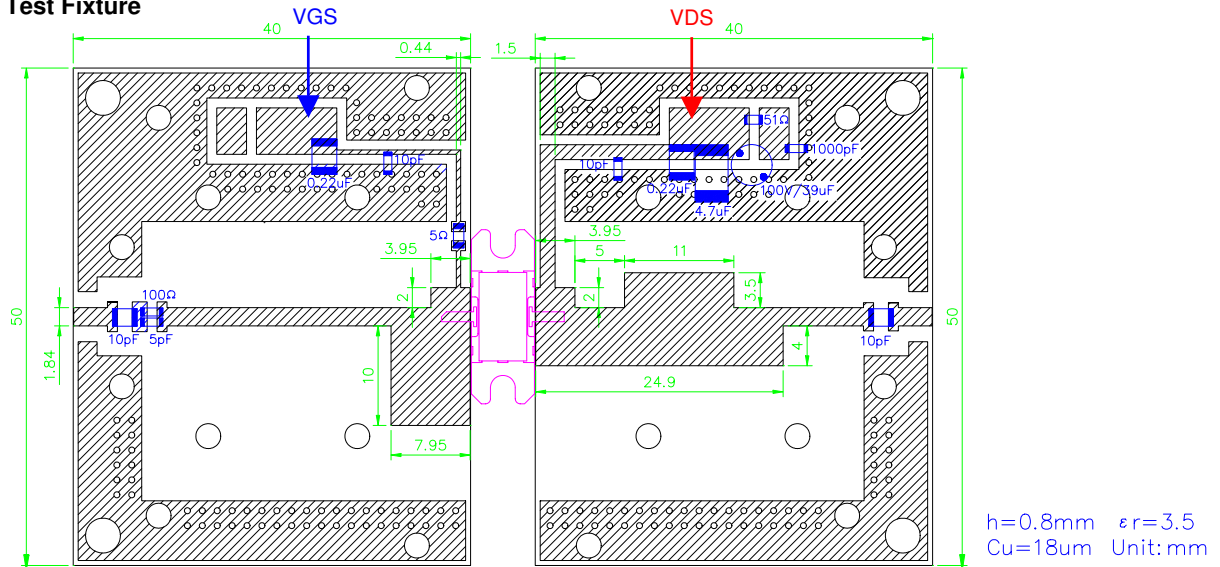




GaN-HEMT 30W

EGN21C030MK

High Voltage - High Power GaN-HEMT

MTTF Calculation
- Estimated MTTF -

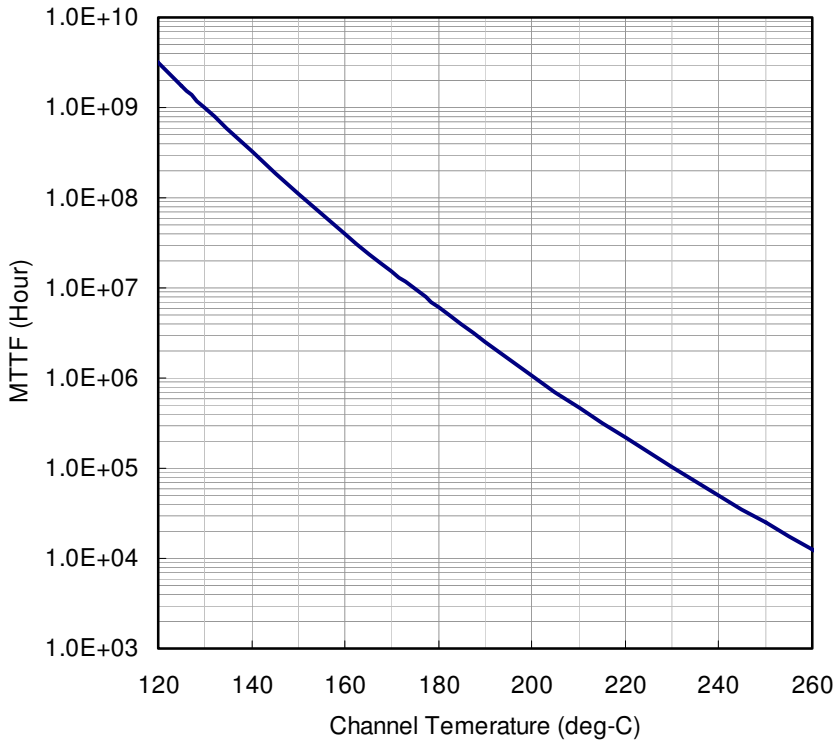

Ea= 1.6eV
Confidence Level= 90%

| Channel Temp (deg-C) | MTTF (Hours) |
|----------------------|------------------------|
| 160 | 4.05 x 10 ⁷ |
| 180 | 6.07 x 10 ⁶ |
| 200 | 1.07 x 10 ⁶ |

$$AF = \exp\left[-\frac{Ea}{k}\left(\frac{1}{T_{stress}} - \frac{1}{T_{use}}\right)\right]$$

$$MTTF_{use} = MTTF_{stress} * AF$$

Where;

AF: acceleration factor

Ea: activation energy (1.6 eV)

k: Boltzman's constant (8.62 x 10⁻⁵ eV/K)

T_{stress}: stress temperature (K)

T_{use}: use temperature (K)

ESD characteristic

| Test Methodology | Class |
|--|-------|
| Human Body Model (per JESD22-A114) | 0 |
| Machine Model (per JEIA/ESD22-A115) | A |




GaN-HEMT 30W

EGN21C030MK


High Voltage - High Power GaN-HEMT

- Reference DATA -

S-Parameters @V_{DS}=50V, I_{DS(DC)}=150mA, f=0.5 to 5.5GHz
Z_l = Z_s = 50 ohm Marker : 2.14GHz

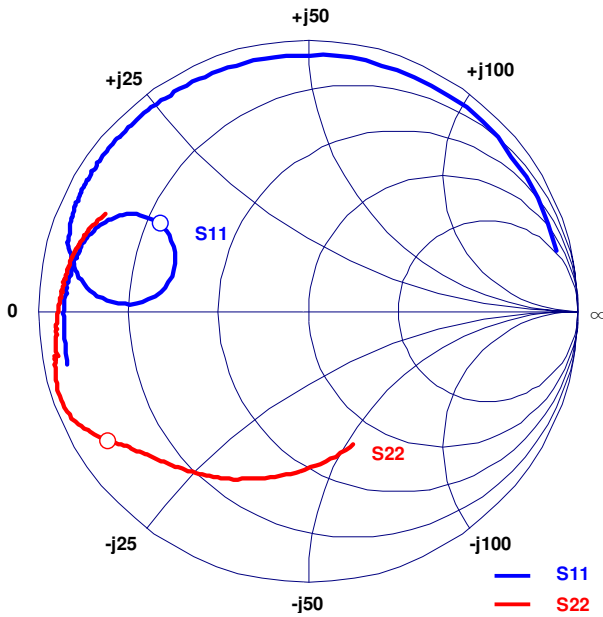

| Freq. GHz | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|-----------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|---------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 0.50 | 0.92 | -167.76 | 11.88 | 67.33 | 0.007 | -1.05 | 0.52 | -71.31 |
| 0.60 | 0.91 | -172.44 | 9.91 | 60.12 | 0.008 | -9.94 | 0.55 | -79.39 |
| 0.70 | 0.91 | -176.35 | 8.50 | 53.22 | 0.007 | -8.07 | 0.57 | -87.12 |
| 0.80 | 0.91 | -179.64 | 7.40 | 46.87 | 0.007 | -10.93 | 0.60 | -94.46 |
| 0.90 | 0.90 | 177.22 | 6.61 | 39.83 | 0.007 | -8.43 | 0.62 | -101.38 |
| 1.00 | 0.90 | 174.37 | 5.93 | 34.28 | 0.007 | -5.18 | 0.65 | -107.51 |
| 1.10 | 0.90 | 172.14 | 5.46 | 28.05 | 0.006 | -8.73 | 0.68 | -112.74 |
| 1.20 | 0.89 | 169.65 | 5.09 | 22.56 | 0.006 | -11.64 | 0.70 | -117.63 |
| 1.30 | 0.88 | 167.20 | 4.78 | 16.88 | 0.005 | -8.15 | 0.71 | -122.04 |
| 1.40 | 0.88 | 164.80 | 4.53 | 10.93 | 0.006 | 3.38 | 0.73 | -126.03 |
| 1.50 | 0.87 | 162.30 | 4.38 | 4.93 | 0.007 | 7.18 | 0.75 | -129.81 |
| 1.60 | 0.85 | 160.12 | 4.27 | -1.03 | 0.007 | -0.84 | 0.77 | -133.16 |
| 1.70 | 0.84 | 157.53 | 4.21 | -7.87 | 0.007 | 7.36 | 0.79 | -136.27 |
| 1.80 | 0.81 | 155.22 | 4.21 | -14.31 | 0.008 | 2.46 | 0.80 | -139.10 |
| 1.90 | 0.78 | 152.62 | 4.27 | -22.78 | 0.008 | 5.59 | 0.82 | -141.54 |
| 2.00 | 0.73 | 150.55 | 4.35 | -31.36 | 0.008 | -2.59 | 0.84 | -144.10 |
| 2.10 | 0.67 | 149.70 | 4.49 | -41.55 | 0.010 | -6.62 | 0.86 | -145.87 |
| 2.20 | 0.60 | 150.44 | 4.58 | -53.44 | 0.011 | -17.62 | 0.90 | -148.41 |
| 2.30 | 0.54 | 156.11 | 4.58 | -68.01 | 0.011 | -26.30 | 0.92 | -151.11 |
| 2.40 | 0.52 | 165.55 | 4.47 | -82.96 | 0.011 | -34.31 | 0.95 | -153.98 |
| 2.50 | 0.57 | 174.45 | 4.09 | -100.02 | 0.012 | -53.88 | 0.97 | -157.62 |
| 2.60 | 0.66 | 177.90 | 3.58 | -115.25 | 0.009 | -67.79 | 0.97 | -161.15 |
| 2.70 | 0.75 | 177.13 | 3.04 | -128.27 | 0.008 | -87.49 | 0.97 | -164.01 |
| 2.80 | 0.81 | 174.57 | 2.53 | -138.81 | 0.006 | -89.61 | 0.96 | -166.41 |
| 2.90 | 0.86 | 171.89 | 2.14 | -148.70 | 0.005 | -103.89 | 0.96 | -168.36 |
| 3.00 | 0.89 | 168.51 | 1.79 | -155.37 | 0.004 | -137.30 | 0.95 | -170.12 |
| 3.10 | 0.91 | 166.09 | 1.53 | -162.57 | 0.003 | -132.30 | 0.95 | -171.70 |
| 3.20 | 0.93 | 163.76 | 1.32 | -167.51 | 0.002 | 171.39 | 0.94 | -173.24 |
| 3.30 | 0.94 | 160.96 | 1.15 | -172.75 | 0.003 | -179.32 | 0.94 | -174.55 |
| 3.40 | 0.94 | 158.76 | 1.01 | -177.44 | 0.003 | 139.32 | 0.94 | -175.89 |
| 3.50 | 0.95 | 156.39 | 0.90 | 178.06 | 0.003 | 132.52 | 0.93 | -177.18 |
| 3.60 | 0.95 | 154.54 | 0.81 | 175.02 | 0.005 | 127.36 | 0.93 | -178.48 |
| 3.70 | 0.95 | 152.38 | 0.73 | 170.36 | 0.005 | 122.70 | 0.93 | -179.59 |
| 3.80 | 0.95 | 150.32 | 0.68 | 167.48 | 0.006 | 112.99 | 0.93 | 179.18 |
| 3.90 | 0.95 | 147.92 | 0.63 | 163.44 | 0.007 | 102.76 | 0.92 | 177.96 |
| 4.00 | 0.95 | 145.49 | 0.58 | 160.11 | 0.009 | 106.05 | 0.92 | 176.76 |
| 4.10 | 0.95 | 143.02 | 0.56 | 156.87 | 0.010 | 95.65 | 0.92 | 175.67 |
| 4.20 | 0.95 | 140.18 | 0.52 | 152.60 | 0.011 | 87.44 | 0.91 | 174.45 |
| 4.30 | 0.95 | 137.45 | 0.51 | 149.28 | 0.013 | 86.12 | 0.91 | 173.35 |
| 4.40 | 0.95 | 133.74 | 0.49 | 145.93 | 0.015 | 77.51 | 0.91 | 172.11 |
| 4.50 | 0.95 | 129.79 | 0.48 | 140.55 | 0.017 | 73.28 | 0.91 | 170.84 |
| 4.60 | 0.95 | 124.99 | 0.48 | 136.95 | 0.020 | 66.34 | 0.90 | 169.42 |
| 4.70 | 0.95 | 120.07 | 0.48 | 131.34 | 0.021 | 58.68 | 0.90 | 168.05 |
| 4.80 | 0.95 | 113.93 | 0.48 | 126.35 | 0.024 | 52.95 | 0.90 | 166.61 |
| 4.90 | 0.95 | 106.51 | 0.50 | 120.05 | 0.027 | 44.93 | 0.89 | 165.05 |
| 5.00 | 0.95 | 97.54 | 0.50 | 113.46 | 0.031 | 37.57 | 0.89 | 163.57 |
| 5.10 | 0.95 | 86.55 | 0.53 | 105.86 | 0.036 | 28.40 | 0.88 | 161.77 |
| 5.20 | 0.95 | 73.45 | 0.55 | 96.22 | 0.041 | 19.22 | 0.87 | 160.12 |
| 5.30 | 0.95 | 56.67 | 0.57 | 85.88 | 0.047 | 7.98 | 0.86 | 158.23 |
| 5.40 | 0.94 | 37.29 | 0.60 | 71.99 | 0.053 | -4.75 | 0.85 | 156.31 |
| 5.50 | 0.95 | 13.73 | 0.60 | 58.10 | 0.060 | -19.80 | 0.83 | 154.40 |

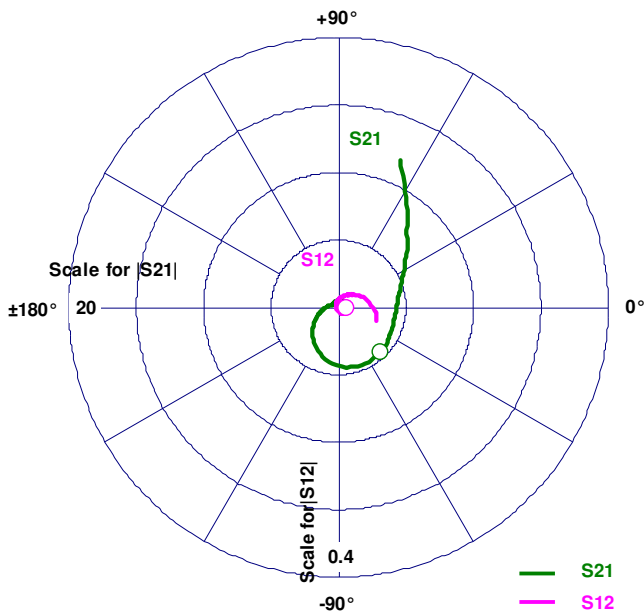



GaN-HEMT 30W

EGN21C030MK

High Voltage - High Power GaN-HEMT

MK Package Outline Metal-Ceramic Hermetic Package

