

FEATURES

- High Voltage Operation : $V_{DS}=50V$
- High Power : 320W (min.) @ $P_{in}=15.8W$ (42dBm)
- High Efficiency: 50%(typ.) @ $P_{in}=15.8W$ (42dBm)
- Broad Band: 2.7 to 3.1GHz
- Impedance Matched $Z_{in}/Z_{out} = 50 \text{ ohm}$

High Voltage - High Power GaN-HEMT for Radar



DESCRIPTION

Sumitomo GaN-HEMT DS/SGN2731-320D-R offers high power, high efficiency and greater consistency covering 2.7 to 3.1GHz for S-band radar applications with 50V operation and pulse condition of up to 300μsec pulse width and duty of up to 10%.

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Condition	Rating	Unit
Operating Voltage	V_{DS}		55	V
Drain-Source Voltage	V_{DS}	$V_{GS}=-8V$	160	V
Gate-Source Voltage	V_{GS}		- 15	V
Storage Temperature	T_{stg}		-65 to +175	deg.C
Channel Temperature	T_{ch}		250	deg.C

RECOMMENDED OPERATING CONDITION(Case Temperature $T_c=25 \text{ deg.C}$)

Item	Symbol	Condition	Limit	Unit
DC Input Voltage	V_{DS}		≤ 50	V
Forward Gate Current	I_{GF}	$RG=6.2 \text{ ohm}$	≤ 408	mA
Reverse Gate Current	I_{GR}	$RG=6.2 \text{ ohm}$	≥ -15.6	mA
Pulse Width	PW	Duty 10%	≤ 300	μ sec
Channel Temperature	T_{ch}		180	deg.C


Sumitomo recommends that the use of a reflective harmonic rejection filter at the device output be avoided. With highly compressed saturation operation, the voltage portion of the RF signal may exceed the device breakdown voltage due to phasor combination of reflected harmonic voltages. Permanent damage may result. If a harmonic rejection filter is necessary, Sumitomo recommends using either a lossy filter or a harmonic isolator in front of a reflective filter.

ELECTRICAL CHARACTERISTICS (Case Temperature $T_c = 25 \text{ deg.C}$)


Item	Symbol	Condition	Limit			Unit
			Min.	Typ.	Max.	
Pinch-Off Voltage	V_p	$V_{DS}=50V \ I_{DS}=108.8mA$	-1.0	-2.0	-3.5	V
Output Power	P_{out}	$V_{DS}=50V$	320	380	-	W
Drain Efficiency	η_d	$I_{DS(DC)}=1500mA$	-	50	-	%
Power Gain	G_p	$P_{in}=15.8W$ (42dBm)	13.0	-	-	dB
Gain Flatness	GF	$f=2.7, 2.9, 3.1GHz$ $PW=200 \mu \text{ sec}, \text{Duty } 10\%$	-	0.8	1.5	dB
Thermal Resistance	R_{th}	Channel to Case Measured w/CW at 105W P_{DC}	-	0.55	0.7	deg.C/W

RoHS COMPLIANCE | Yes

TEST FIXTURE

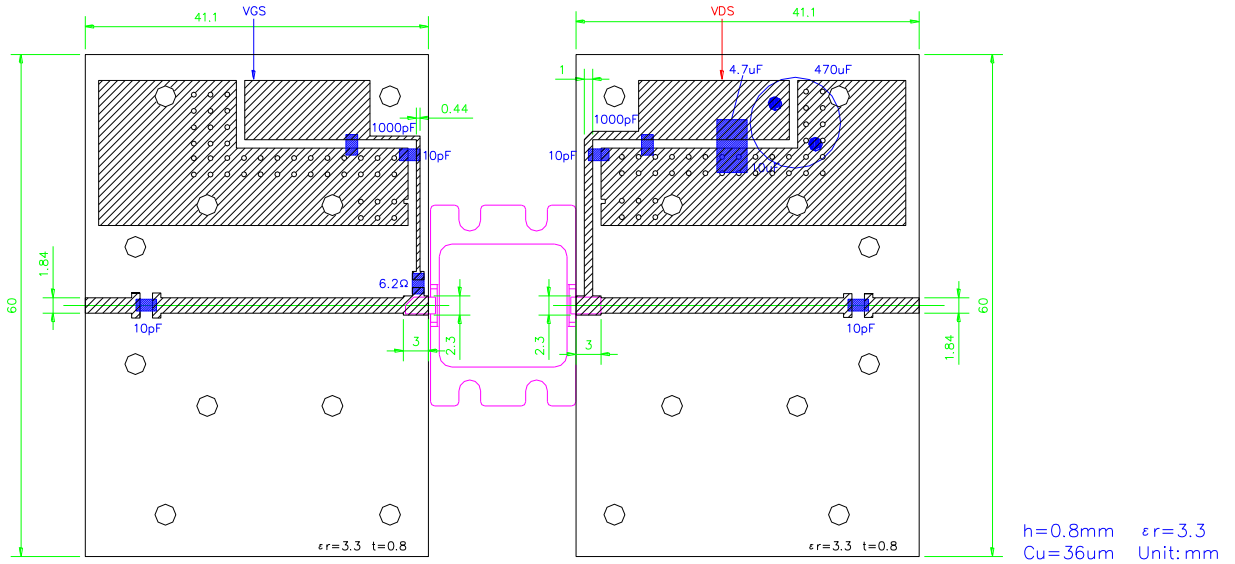

IV Package Outline Metal-Ceramic Hermetic Package

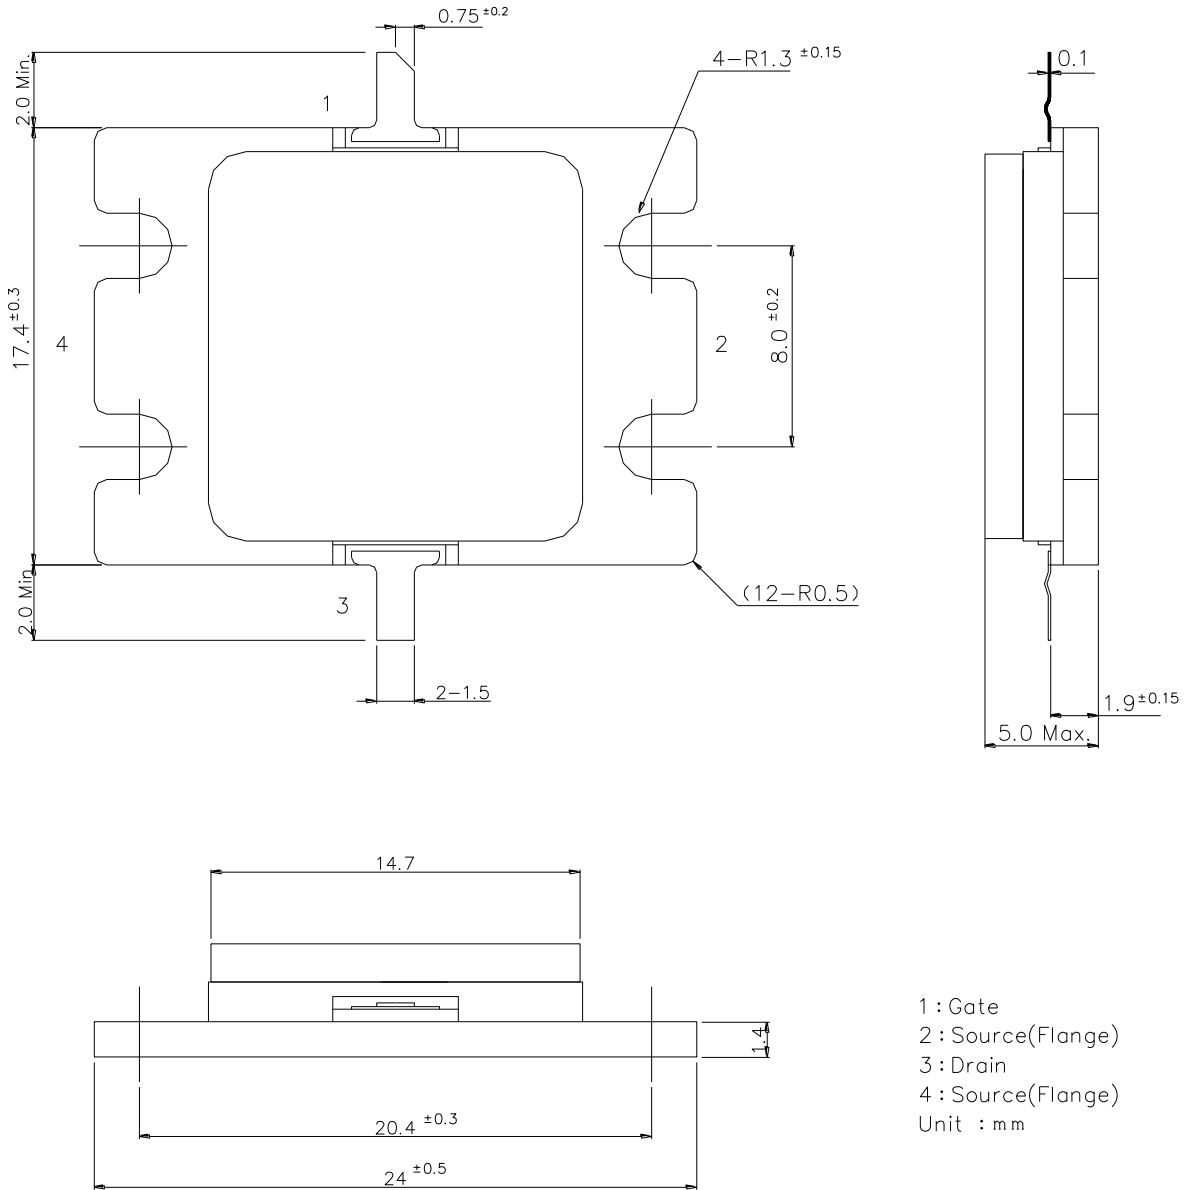

Important Notice

DS/SGN2731-320D-R is still in DS phase and is not qualified part.



Preliminary

DS/SGN2731-320D-R

High Voltage - High Power GaN-HEMT for Radar

For further information please contact:

<http://global-sei.com/Electro-optic/about/office.html>

Preliminary